

2019年版



2019年版

# 桥架/母线槽选型样本

## Bridge/Busbar Catalogue



地址：安徽省天长市仁和南路20号  
ADD: No.20 south Renhe road, Tianchang, Anhui  
邮编(ZIP): 239300  
电话(TEL): 0550-7777777 7038698 7308802  
传真(FAX): 0550-7028077 7038699  
网址(Http): [www.tiankang.com](http://www.tiankang.com)  
E-mail: [xsc@tiankang.com](mailto:xsc@tiankang.com)

安徽天康(集团)股份有限公司  
ANHUI TIANKANG(GROUP) SHARES CO.,LTD

# 企业介绍

## Company profile



安徽天康（集团）股份有限公司系国家大型企业，总部位于长江之滨的天长市，面向大上海，南接古城南京，东与扬州相邻，宁淮高速公路贯穿境内，地处中国经济最具活力的“长三角”地区，具有良好的经济发展环境。

安徽天康（集团）股份有限公司、安徽省天长市仪表厂、中外合资安徽省天康光电有限公司、安徽省天康药业有限公司、安徽省天长市天康医院、安徽省天康医疗用品有限公司等单位共同组建了安徽天康集团。

公司主要开发、制造和销售仪器仪表、电气设备、电线电缆、光纤光缆和电缆桥架等产品，目前公司生产的电线电缆产品包括电力电缆、控制电缆、计算机电缆、光伏电缆、橡套电缆、通信电缆、交联电缆、补偿电缆、阻燃电缆、防火电缆、高温电缆、船用电缆、钢芯铝绞线、矿物绝缘电缆、自限温伴热电缆等；通信光缆产品包括中心束管式光缆、层绞式光缆、带状光缆、ADSS光缆等；电缆桥架产品包括XQJ系列电缆桥架、玻璃钢桥架、铝合金桥架及CCKX、CFW、CMC系列母线槽等；公司同时生产管阀件、钢管、波纹管等；

企业连续多年被评为“全国守合同重信用企业”、“省级依法纳税先进企业”、“国家级高新技术企业”、“银行资信AAA级企业”、“中国电子百强企业”、“中国电线电缆20强企业”；“天仪”、“洲鸽”牌仪表、电缆产品荣获“中国驰名商标”、“安徽省名牌产品”等荣誉称号；我公司已分别通过“ISO9001：2008质量管理体系认证、ISO14001:2004环境管理体系认证、OHSAS18001:2007职业健康安全管理体系认证及GJB9001B—2009国军标质量管理体系认证，同时于2016年8月取得国家认可委员会颁布的CNAS实验室认可证书。企业产品已覆盖全国除台湾以外的所有电力、石油、化工、机械、冶金、网络通信、医疗卫生等行业，并出口俄罗斯、越南、伊朗、印度、巴西、巴基斯坦、印尼、缅甸、尼日利亚、贝宁等几十个国家和地区。

安徽天康（集团）股份有限公司正以其独特的企业发展理念和团结、务实、创新发展的企业精神，融合在世界经济潮流中，并努力成为我国现代企业的发展典范。





Anhui Tiangkang (Group) Co., Ltd. is a state-owned big enterprise. Its head quarter locates in China's most economically dynamic "Yangtze river delta" region which is facing Shanghai, connecting Nanjing, reaching to Yangzhou in the east with Ninghuai expressway passing through, where there is good economic development environment.

Anhui Tiangkang Group consists of Anhui Tianchang Instrument and Meters Factory, Sino-Foreign Joint Venture Anhui Tiangkang Optoelectronics Co., Ltd., Anhui Tiangkang Pharmaceuticals Co. Ltd., Anhui Tianchang Tiangkang Hospital, Anhui Tiangkang Medical Supplies Co., Ltd.

The company engages in development, production and sales of instruments and meters, electronic equipment, wires and cable, optical fiber and cable and cable bridge etc. Current wire and cable products include power cable, controlling cable, computer cable, Pv cable, cabtyre cable, communication cable, crosslinked cable, compensation cable, flame-resistant cable, fireproof cable, high-temperature cable, marine cable, aluminum cable steel reinforced, mineral insulated cable, self-limiting heat tracing cable etc., communication cable products include central beam tube optical cable, layer-standing cable, optical fiber ribbon cable, ADSS cable etc., cable bridge products include XQJ series cable bridge, glass steel bridge, aluminum alloy bridge, and CCKX、CFW、CM series busway etc. The company also produces valves, steel pipes and bellows etc.

The company is continuously awarded with "national contract and credit enterprise", "provincial-level advanced enterprise paying taxes according to law", "national high-tech enterprise", "bank credit AAA level enterprise", "China's top 100 electronic enterprise", "China's top 20 wire and cable enterprise". "TianYi", "ZhouOu" brand meters and cable products are awarded "China Famous Brand", "Anhui Famous Brand". The company has been certified with ISO9001:2008 quality management certificate, ISO14001:2004 environment management certificate, OHSAS18001:2007 occupational health and safety management certificate and GJB9001B—2009 national military standard quality management certificate. Meanwhile we were issued CNAS lab certificate by national accreditation committee. Our products have covered industries of electronic, petroleum, chemicals, machinery, metallurgy, network communication, medical health all over China (except Taiwan). We are also exporting to Russia, Vietnam, Iran, India, Brazil, Pakistan, Indonesia, Burma, Nigeria, Benin etc.

Anhui Tiangkang (Group) Co., Ltd. is developing in its own unique concept combining with the spirits of unity, pragmatism and innovation to integrate in the world's economic trend. We are taking effort to develop into a model of China's modern enterprises.

**竭诚为客户提供一流的产品和至上的服务**



**Wholeheartedly Provide Customers With First-class Products and Service**



# DIRECTORY

# 目录




|                                 |    |
|---------------------------------|----|
| 安装支架 .....                      | 01 |
| Mounting Support                |    |
| 大跨距桥架 .....                     | 06 |
| Large Span Support              |    |
| 电缆桥架型号表示法 .....                 | 08 |
| Cable Support Accessories       |    |
| 槽式桥架 .....                      | 09 |
| Channel Support                 |    |
| 托盘式桥架 .....                     | 15 |
| Tray Support                    |    |
| 梯级式桥架 .....                     | 17 |
| Ladder Support                  |    |
| 组合式桥架 .....                     | 19 |
| Combined Support                |    |
| 防火桥架 .....                      | 22 |
| Fire Resisting Support          |    |
| 阻燃玻璃钢桥架 .....                   | 29 |
| Fire Retarding FRP Support      |    |
| 抗腐蚀铝合金桥架 .....                  | 35 |
| Anti-corrosive Al-alloy Support |    |
| 竖井 .....                        | 47 |
| Shaft Joints                    |    |
| 母线槽 .....                       | 48 |
| Bus Duct                        |    |
| 编织线软连接 .....                    | 68 |
| Braided Flexible Connector      |    |










# BRIDGE CATALOUGE

>>>桥架选型

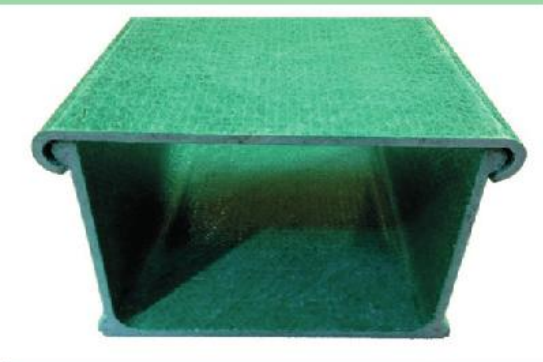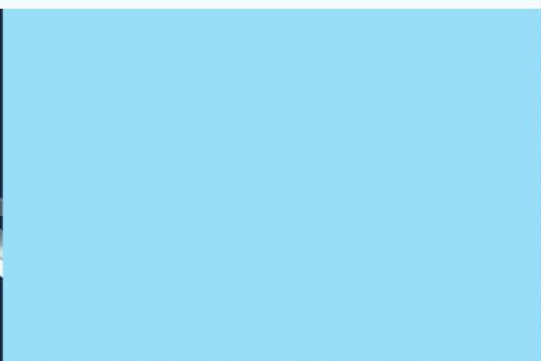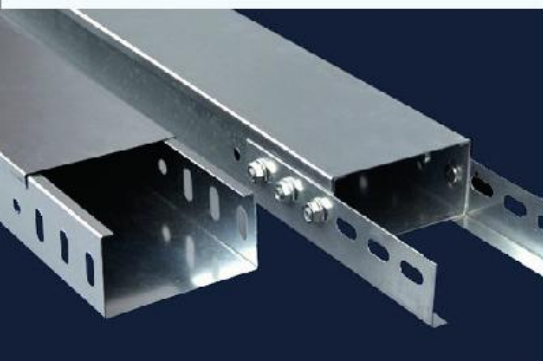












## 立柱 Column













| XQJ-H-01A 工字钢立柱<br>H-girder Column Model XQJ-H-01A                   |             |      |                                                                                       | <table><tr><th>序号<br/>NO.</th><th>型号<br/>Model</th><th>B=80×L</th><th>重量/件 (kg)<br/>Weight/Piece</th><th>B=100×L</th><th>重量/件 (kg)<br/>Weight/Piece</th></tr><tr><td>1</td><td>H-01A-3</td><td>300</td><td>3.34</td><td>300</td><td>4.06</td></tr><tr><td>2</td><td>H-01A-5</td><td>500</td><td>5.57</td><td>500</td><td>6.76</td></tr><tr><td>3</td><td>H-01A-8</td><td>800</td><td>8.91</td><td>800</td><td>10.74</td></tr><tr><td>4</td><td>H-01A-10</td><td>1000</td><td>11.14</td><td>1000</td><td>13.51</td></tr><tr><td>5</td><td>H-01A-15</td><td>1500</td><td>16.71</td><td>1500</td><td>20.27</td></tr><tr><td>6</td><td>H-01A-20</td><td>2000</td><td>22.29</td><td>2000</td><td>27.03</td></tr><tr><td>7</td><td>H-01A-25</td><td>2500</td><td>27.86</td><td>2500</td><td>33.79</td></tr><tr><td>8</td><td>H-01A-30</td><td>3000</td><td>33.43</td><td>3000</td><td>40.54</td></tr></table> | 序号<br>NO.                 | 型号<br>Model | B=80×L       | 重量/件 (kg)<br>Weight/Piece | B=100×L       | 重量/件 (kg)<br>Weight/Piece | 1                                                                                     | H-01A-3 | 300   | 3.34                                                                                  | 300         | 4.06    | 2     | H-01A-5 | 500   | 5.57  | 500     | 6.76  | 3     | H-01A-8 | 800   | 8.91     | 800  | 10.74 | 4      | H-01A-10    | 1000     | 11.14  | 1000  | 13.51 | 5      | H-01A-15 | 1500  | 16.71 | 1500   | 20.27 | 6    | H-01A-20 | 2000 | 22.29 | 2000   | 27.03 | 7    | H-01A-25 | 2500 | 27.86 | 2500 | 33.79 | 8 | H-01A-30 | 3000 | 33.43 | 3000 | 40.54 |
|----------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------|--------------|---------------------------|---------------|---------------------------|---------------------------------------------------------------------------------------|---------|-------|---------------------------------------------------------------------------------------|-------------|---------|-------|---------|-------|-------|---------|-------|-------|---------|-------|----------|------|-------|--------|-------------|----------|--------|-------|-------|--------|----------|-------|-------|--------|-------|------|----------|------|-------|--------|-------|------|----------|------|-------|------|-------|---|----------|------|-------|------|-------|
| 序号<br>NO.                                                            | 型号<br>Model | B=80×L                                                                                | 重量/件 (kg)<br>Weight/Piece                                                             | B=100×L                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 重量/件 (kg)<br>Weight/Piece |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 1                                                                    | H-01A-3     | 300                                                                                   | 3.34                                                                                  | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4.06                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 2                                                                    | H-01A-5     | 500                                                                                   | 5.57                                                                                  | 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 6.76                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 3                                                                    | H-01A-8     | 800                                                                                   | 8.91                                                                                  | 800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 10.74                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 4                                                                    | H-01A-10    | 1000                                                                                  | 11.14                                                                                 | 1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 13.51                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 5                                                                    | H-01A-15    | 1500                                                                                  | 16.71                                                                                 | 1500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 20.27                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 6                                                                    | H-01A-20    | 2000                                                                                  | 22.29                                                                                 | 2000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 27.03                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 7                                                                    | H-01A-25    | 2500                                                                                  | 27.86                                                                                 | 2500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 33.79                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 8                                                                    | H-01A-30    | 3000                                                                                  | 33.43                                                                                 | 3000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 40.54                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-H-01B 丁字钢立柱<br>T-iron Column Model XQJ-H-01B                     |             |      |                                                                                       | <table><tr><th>序号<br/>NO.</th><th>型号<br/>Model</th><th>规格<br/>L Size</th><th>重量/件 (kg)<br/>Weight/Piece</th><th>备注<br/>Remarks</th></tr><tr><td>1</td><td>H-01B-3</td><td>300</td><td>3.23</td><td></td></tr><tr><td>2</td><td>H-01B-5</td><td>500</td><td>5.39</td><td></td></tr><tr><td>3</td><td>H-01B-8</td><td>800</td><td>8.61</td><td></td></tr><tr><td>4</td><td>H-01B-10</td><td>1000</td><td>10.77</td><td></td></tr><tr><td>5</td><td>H-01B-15</td><td>1500</td><td>16.16</td><td></td></tr><tr><td>6</td><td>H-01B-20</td><td>2000</td><td>21.54</td><td></td></tr></table>                                                                                                                                                                                                                                                                                                                 | 序号<br>NO.                 | 型号<br>Model | 规格<br>L Size | 重量/件 (kg)<br>Weight/Piece | 备注<br>Remarks | 1                         | H-01B-3                                                                               | 300     | 3.23  |                                                                                       | 2           | H-01B-5 | 500   | 5.39    |       | 3     | H-01B-8 | 800   | 8.61  |         | 4     | H-01B-10 | 1000 | 10.77 |        | 5           | H-01B-15 | 1500   | 16.16 |       | 6      | H-01B-20 | 2000  | 21.54 |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 序号<br>NO.                                                            | 型号<br>Model | 规格<br>L Size                                                                          | 重量/件 (kg)<br>Weight/Piece                                                             | 备注<br>Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 1                                                                    | H-01B-3     | 300                                                                                   | 3.23                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 2                                                                    | H-01B-5     | 500                                                                                   | 5.39                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 3                                                                    | H-01B-8     | 800                                                                                   | 8.61                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 4                                                                    | H-01B-10    | 1000                                                                                  | 10.77                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 5                                                                    | H-01B-15    | 1500                                                                                  | 16.16                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 6                                                                    | H-01B-20    | 2000                                                                                  | 21.54                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-H-01C 槽钢立柱<br>E-channel Column Model XQJ-H-01C                   |             |      |                                                                                       | <table><tr><th>序号<br/>NO.</th><th>型号<br/>Model</th><th>规格<br/>L Size</th><th>重量/件 (kg)<br/>Weight/Piece</th><th>备注<br/>Remarks</th></tr><tr><td>1</td><td>H-01C-3</td><td>300</td><td>4.29</td><td></td></tr><tr><td>2</td><td>H-01C-5</td><td>500</td><td>7.16</td><td></td></tr><tr><td>3</td><td>H-01C-8</td><td>800</td><td>11.44</td><td></td></tr><tr><td>4</td><td>H-01C-10</td><td>1000</td><td>14.30</td><td></td></tr><tr><td>5</td><td>H-01C-15</td><td>1500</td><td>21.44</td><td></td></tr><tr><td>6</td><td>H-01C-20</td><td>2000</td><td>22.89</td><td></td></tr></table>                                                                                                                                                                                                                                                                                                                | 序号<br>NO.                 | 型号<br>Model | 规格<br>L Size | 重量/件 (kg)<br>Weight/Piece | 备注<br>Remarks | 1                         | H-01C-3                                                                               | 300     | 4.29  |                                                                                       | 2           | H-01C-5 | 500   | 7.16    |       | 3     | H-01C-8 | 800   | 11.44 |         | 4     | H-01C-10 | 1000 | 14.30 |        | 5           | H-01C-15 | 1500   | 21.44 |       | 6      | H-01C-20 | 2000  | 22.89 |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 序号<br>NO.                                                            | 型号<br>Model | 规格<br>L Size                                                                          | 重量/件 (kg)<br>Weight/Piece                                                             | 备注<br>Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 1                                                                    | H-01C-3     | 300                                                                                   | 4.29                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 2                                                                    | H-01C-5     | 500                                                                                   | 7.16                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 3                                                                    | H-01C-8     | 800                                                                                   | 11.44                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 4                                                                    | H-01C-10    | 1000                                                                                  | 14.30                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 5                                                                    | H-01C-15    | 1500                                                                                  | 21.44                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 6                                                                    | H-01C-20    | 2000                                                                                  | 22.89                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-H-01D 角钢立柱<br>Angel Iron Column Model XQJ-H-01D                  |             |     |                                                                                       | <table><tr><th>序号<br/>NO.</th><th>型号<br/>Model</th><th>规格<br/>L Size</th><th>重量/件 (kg)<br/>Weight/Piece</th><th>备注<br/>Remarks</th></tr><tr><td>1</td><td>H-01D-3</td><td>300</td><td>1.61</td><td></td></tr><tr><td>2</td><td>H-01D-5</td><td>500</td><td>2.69</td><td></td></tr><tr><td>3</td><td>H-01D-8</td><td>800</td><td>4.31</td><td></td></tr><tr><td>4</td><td>H-01D-10</td><td>1000</td><td>5.39</td><td></td></tr><tr><td>5</td><td>H-01D-15</td><td>1500</td><td>8.09</td><td></td></tr><tr><td>6</td><td>H-01D-20</td><td>2000</td><td>10.77</td><td></td></tr></table>                                                                                                                                                                                                                                                                                                                   | 序号<br>NO.                 | 型号<br>Model | 规格<br>L Size | 重量/件 (kg)<br>Weight/Piece | 备注<br>Remarks | 1                         | H-01D-3                                                                               | 300     | 1.61  |                                                                                       | 2           | H-01D-5 | 500   | 2.69    |       | 3     | H-01D-8 | 800   | 4.31  |         | 4     | H-01D-10 | 1000 | 5.39  |        | 5           | H-01D-15 | 1500   | 8.09  |       | 6      | H-01D-20 | 2000  | 10.77 |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 序号<br>NO.                                                            | 型号<br>Model | 规格<br>L Size                                                                          | 重量/件 (kg)<br>Weight/Piece                                                             | 备注<br>Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 1                                                                    | H-01D-3     | 300                                                                                   | 1.61                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 2                                                                    | H-01D-5     | 500                                                                                   | 2.69                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 3                                                                    | H-01D-8     | 800                                                                                   | 4.31                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 4                                                                    | H-01D-10    | 1000                                                                                  | 5.39                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 5                                                                    | H-01D-15    | 1500                                                                                  | 8.09                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 6                                                                    | H-01D-20    | 2000                                                                                  | 10.77                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-H-01E 异型立柱<br>Special-shaped Steel Column Model XQJ-H-01E        |             |    |                                                                                       | <table><tr><th>序号<br/>NO.</th><th>型号<br/>Model</th><th>规格<br/>L Size</th><th>重量/件 (kg)<br/>Weight/Piece</th><th>备注<br/>Remarks</th></tr><tr><td>1</td><td>H-01E-3</td><td>300</td><td>1.63</td><td></td></tr><tr><td>2</td><td>H-01E-5</td><td>500</td><td>2.72</td><td></td></tr><tr><td>3</td><td>H-01E-8</td><td>800</td><td>4.36</td><td></td></tr><tr><td>4</td><td>H-01E-10</td><td>1000</td><td>5.46</td><td></td></tr><tr><td>5</td><td>H-01E-15</td><td>1500</td><td>8.16</td><td></td></tr><tr><td>6</td><td>H-01E-20</td><td>2000</td><td>10.87</td><td></td></tr></table>                                                                                                                                                                                                                                                                                                                   | 序号<br>NO.                 | 型号<br>Model | 规格<br>L Size | 重量/件 (kg)<br>Weight/Piece | 备注<br>Remarks | 1                         | H-01E-3                                                                               | 300     | 1.63  |                                                                                       | 2           | H-01E-5 | 500   | 2.72    |       | 3     | H-01E-8 | 800   | 4.36  |         | 4     | H-01E-10 | 1000 | 5.46  |        | 5           | H-01E-15 | 1500   | 8.16  |       | 6      | H-01E-20 | 2000  | 10.87 |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 序号<br>NO.                                                            | 型号<br>Model | 规格<br>L Size                                                                          | 重量/件 (kg)<br>Weight/Piece                                                             | 备注<br>Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 1                                                                    | H-01E-3     | 300                                                                                   | 1.63                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 2                                                                    | H-01E-5     | 500                                                                                   | 2.72                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 3                                                                    | H-01E-8     | 800                                                                                   | 4.36                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 4                                                                    | H-01E-10    | 1000                                                                                  | 5.46                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 5                                                                    | H-01E-15    | 1500                                                                                  | 8.16                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 6                                                                    | H-01E-20    | 2000                                                                                  | 10.87                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-ZJ1 型支架<br>Support Model XQJ-ZJ1                                 |             |    |                                                                                       | <table><tr><th>型号<br/>Model</th><th>b(mm)</th><th>a(mm)</th><th>c(mm)</th><th>e(mm)</th><th>重量<br/>Weight</th></tr><tr><td>ZJ1-2</td><td>250</td><td rowspan="4">250</td><td rowspan="4"></td><td rowspan="4">50<br/>L50×5</td><td>4.04</td></tr><tr><td>ZJ1-3</td><td>350</td><td>4.58</td></tr><tr><td>ZJ1-4</td><td>450</td><td>5.12</td></tr><tr><td>ZJ1-5</td><td>550</td><td>5.98</td></tr><tr><td>ZJ1-6</td><td>650</td><td rowspan="4">280</td><td rowspan="4">470</td><td rowspan="4">63<br/>L63×6</td><td>9.89</td></tr><tr><td>ZJ1-10</td><td>1050</td><td>13.16</td></tr><tr><td>ZJ1-12</td><td>1250</td><td>14.79</td></tr><tr><td></td><td></td><td></td></tr></table>                                                                                                                               | 型号<br>Model               | b(mm)       | a(mm)        | c(mm)                     | e(mm)         | 重量<br>Weight              | ZJ1-2                                                                                 | 250     | 250   |  | 50<br>L50×5 | 4.04    | ZJ1-3 | 350     | 4.58  | ZJ1-4 | 450     | 5.12  | ZJ1-5 | 550     | 5.98  | ZJ1-6    | 650  | 280   | 470    | 63<br>L63×6 | 9.89     | ZJ1-10 | 1050  | 13.16 | ZJ1-12 | 1250     | 14.79 |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 型号<br>Model                                                          | b(mm)       | a(mm)                                                                                 | c(mm)                                                                                 | e(mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 重量<br>Weight              |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-2                                                                | 250         | 250                                                                                   |  | 50<br>L50×5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4.04                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-3                                                                | 350         |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4.58                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-4                                                                | 450         |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5.12                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-5                                                                | 550         |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5.98                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-6                                                                | 650         | 280                                                                                   | 470                                                                                   | 63<br>L63×6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 9.89                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-10                                                               | 1050        |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 13.16                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ1-12                                                               | 1250        |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 14.79                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
|                                                                      |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-ZJ2 型支架<br>Support Model XQJ-ZJ2                                 |             |    |                                                                                       | <table><tr><th>型号<br/>Model</th><th>b(mm)</th><th>c(mm)</th><th>重量<br/>Weight</th></tr><tr><td>ZJ2-2</td><td>250</td><td rowspan="4"></td><td>2.38</td></tr><tr><td>ZJ2-3</td><td>350</td><td>3.31</td></tr><tr><td>ZJ2-4</td><td>450</td><td>4.25</td></tr><tr><td>ZJ2-5</td><td>550</td><td>5.21</td></tr><tr><td>ZJ2-6</td><td>650</td><td rowspan="4">470</td><td>6.16</td></tr><tr><td>ZJ2-10</td><td>1050</td><td>9.94</td></tr><tr><td>ZJ2-12</td><td>1250</td><td>11.84</td></tr><tr><td></td><td></td><td></td></tr></table>                                                                                                                                                                                                                                                                              | 型号<br>Model               | b(mm)       | c(mm)        | 重量<br>Weight              | ZJ2-2         | 250                       |  | 2.38    | ZJ2-3 | 350                                                                                   | 3.31        | ZJ2-4   | 450   | 4.25    | ZJ2-5 | 550   | 5.21    | ZJ2-6 | 650   | 470     | 6.16  | ZJ2-10   | 1050 | 9.94  | ZJ2-12 | 1250        | 11.84    |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| 型号<br>Model                                                          | b(mm)       | c(mm)                                                                                 | 重量<br>Weight                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-2                                                                | 250         |  | 2.38                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-3                                                                | 350         |                                                                                       | 3.31                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-4                                                                | 450         |                                                                                       | 4.25                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-5                                                                | 550         |                                                                                       | 5.21                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-6                                                                | 650         | 470                                                                                   | 6.16                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-10                                                               | 1050        |                                                                                       | 9.94                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ2-12                                                               | 1250        |                                                                                       | 11.84                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
|                                                                      |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| XQJ-ZJ3 型支架<br>Support Model XQJ-ZJ3                                 |             |    |                                                                                       | <table><tr><th>型号<br/>Model</th><th>b(mm)</th><th>a(mm)</th><th>h(mm)</th><th>e(mm)</th><th>重量<br/>Weight</th></tr><tr><td>ZJ3-1</td><td>150</td><td>250</td><td rowspan="3">100</td><td rowspan="3">40×4</td><td>2.38</td></tr><tr><td>ZJ3-2</td><td>250</td><td>350</td><td>2.73</td></tr><tr><td>ZJ3-3</td><td>350</td><td>460</td><td>4.13</td></tr><tr><td>ZJ3-4</td><td>450</td><td>560</td><td rowspan="3">100</td><td rowspan="3">50×5</td><td>4.66</td></tr><tr><td>ZJ3-5</td><td>550</td><td>660</td><td>5.17</td></tr><tr><td>ZJ3-6</td><td>650</td><td>760</td><td>5.71</td></tr><tr><td>ZJ3-10</td><td>1050</td><td>1170</td><td rowspan="2">100</td><td rowspan="2">63×6</td><td>11.40</td></tr><tr><td>ZJ3-12</td><td>1250</td><td>1370</td><td>11.84</td></tr></table>                                                                                                                  | 型号<br>Model               | b(mm)       | a(mm)        | h(mm)                     | e(mm)         | 重量<br>Weight              | ZJ3-1                                                                                 | 150     | 250   | 100                                                                                   | 40×4        | 2.38    | ZJ3-2 | 250     | 350   | 2.73  | ZJ3-3   | 350   | 460   | 4.13    | ZJ3-4 | 450      | 560  | 100   | 50×5   | 4.66        | ZJ3-5    | 550    | 660   | 5.17  | ZJ3-6  | 650      | 760   | 5.71  | ZJ3-10 | 1050  | 1170 | 100      | 63×6 | 11.40 | ZJ3-12 | 1250  | 1370 | 11.84    |      |       |      |       |   |          |      |       |      |       |
| 型号<br>Model                                                          | b(mm)       | a(mm)                                                                                 | h(mm)                                                                                 | e(mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 重量<br>Weight              |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-1                                                                | 150         | 250                                                                                   | 100                                                                                   | 40×4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2.38                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-2                                                                | 250         | 350                                                                                   |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2.73                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-3                                                                | 350         | 460                                                                                   |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4.13                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-4                                                                | 450         | 560                                                                                   | 100                                                                                   | 50×5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4.66                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-5                                                                | 550         | 660                                                                                   |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5.17                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-6                                                                | 650         | 760                                                                                   |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5.71                      |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-10                                                               | 1050        | 1170                                                                                  | 100                                                                                   | 63×6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 11.40                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| ZJ3-12                                                               | 1250        | 1370                                                                                  |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 11.84                     |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |
| II型加重1.01kg/件<br>For Model II, the weight of each is added by 1.01kg |             |                                                                                       |                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |             |              |                           |               |                           |                                                                                       |         |       |                                                                                       |             |         |       |         |       |       |         |       |       |         |       |          |      |       |        |             |          |        |       |       |        |          |       |       |        |       |      |          |      |       |        |       |      |          |      |       |      |       |   |          |      |       |      |       |



# 托 臂 Bracket

| 产品外形 Shape                                                                                                                               | 型号 Model   | L    | 重量kg Weight | 安装图例 Schematic diagram                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------|------------|------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>XQJ-TB-01A 型托臂</b><br>Bracket Model XQJ-TB-01A<br>   | TB-01A-10  | 125  | 0.98        |  <p>H-01A型I字钢立柱<br/>I-shaped Steel Column H-01A<br/>TB-01A型托臂<br/>Bracket model TB-01A</p>                      |
|                                                                                                                                          | TB-01A-15  | 175  | 1.35        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-20  | 225  | 1.76        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-25  | 275  | 2.04        |                                                                                                                                                                                                    |
|                                                                                                                                          | TN-01A-30  | 325  | 2.34        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-40  | 425  | 3.52        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-50  | 525  | 4.12        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-60  | 625  | 4.70        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-80  | 825  | 6.24        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01A-100 | 1025 | 7.36        |                                                                                                                                                                                                    |
| <b>XQJ-TB-01B 型托臂</b><br>Bracket Model XQJ-TB-01B<br>   | TB-01B-10  | 125  | 0.91        |  <p>TB-01B型托臂<br/>Bracket model TB-01B<br/>墙(柱) Wall (Column)</p>                                               |
|                                                                                                                                          | TB-01B-15  | 175  | 1.33        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-20  | 225  | 1.74        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-25  | 275  | 1.98        |                                                                                                                                                                                                    |
|                                                                                                                                          | TN-01B-30  | 325  | 2.32        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-40  | 425  | 2.92        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-50  | 525  | 3.51        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-60  | 625  | 4.11        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-80  | 825  | 5.29        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-01B-100 | 1025 | 7.95        |                                                                                                                                                                                                    |
| <b>XQJ-TB-02A 型托臂</b><br>Bracket Model XQJ-TB-02A<br>  | TB-02-10   | 125  | 0.96        |  <p>Special-shaped Column H-01<br/>H-01E异型立柱<br/>TB-02型托臂<br/>Bracket Model TB-02</p>                          |
|                                                                                                                                          | TB-02-15   | 175  | 1.19        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-20   | 225  | 1.60        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-25   | 275  | 1.95        |                                                                                                                                                                                                    |
|                                                                                                                                          | TN-02-30   | 325  | 2.18        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-40   | 425  | 2.78        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-50   | 525  | 3.36        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-60   | 625  | 3.98        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-80   | 825  | 5.15        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-02-100  | 1025 | 7.92        |                                                                                                                                                                                                    |
| <b>XQJ-TB-03A 型托臂</b><br>Bracket Model XQJ-TB-03A<br> | TB-03A-10  | 125  | 0.92        |  <p>TB-03A型托臂<br/>Bracket model TB-03A<br/>墙(柱) Wall (Column)</p>                                             |
|                                                                                                                                          | TB-03A-15  | 175  | 1.17        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-20  | 225  | 1.56        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-25  | 275  | 1.89        |                                                                                                                                                                                                    |
|                                                                                                                                          | TN-03A-30  | 325  | 2.12        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-40  | 425  | 2.32        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-50  | 525  | 2.72        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-60  | 625  | 3.95        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-80  | 825  | 5.12        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03A-100 | 1025 | 7.79        |                                                                                                                                                                                                    |
| <b>XQJ-TB-03B 型托臂</b><br>Bracket Model XQJ-TB-03B<br> | TB-03B-10  | 125  | 0.79        |  <p>H-01D 型立柱<br/>Column model H-01D<br/>TB-03B型托臂<br/>Bracket model TB-03B</p>                               |
|                                                                                                                                          | TB-03B-15  | 175  | 0.94        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-20  | 225  | 1.26        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-25  | 275  | 1.38        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-30  | 325  | 1.57        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-40  | 425  | 1.78        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-50  | 525  | 1.96        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-60  | 625  | 2.84        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-80  | 825  | 4.16        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-03B-100 | 1025 | 6.38        |                                                                                                                                                                                                    |
| <b>XQJ-TB-04 型托臂</b><br>Bracket Model XQJ-TB-04<br>   | TB-04-15   | 150  | 0.94        |  <p>膨胀螺栓<br/>Expansion bolt<br/>Bracket model TB-04<br/>TB-04型托臂<br/>XQJ系列桥架<br/>XQJ Series Cable Support</p> |
|                                                                                                                                          | TB-04-20   | 200  | 1.26        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-30   | 300  | 1.57        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-35   | 350  | 1.71        |                                                                                                                                                                                                    |
|                                                                                                                                          | TN-04-40   | 400  | 1.88        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-50   | 500  | 2.20        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-55   | 550  | 2.36        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-60   | 600  | 2.51        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-70   | 700  | 2.83        |                                                                                                                                                                                                    |
|                                                                                                                                          | TB-04-80   | 800  | 3.14        |                                                                                                                                                                                                    |

# 连接附件 Connection Accessories

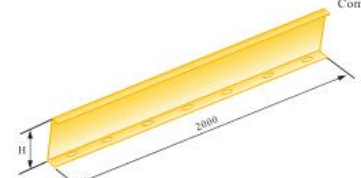
| 产品外形 Shape                                                                                                                                 | 型号 Model                                                                                                                                     | 侧边高H(mm)<br>Side Height | H <sub>1</sub><br>(mm) | B <sub>1</sub><br>(mm) | 安装图例 Schematic diagram                                                                                                                                                                      |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----|
| XQJ-TPC-01A 调宽片<br>Width adjusting piece XQJ-TPC-01A<br>  | TPC-01A-100                                                                                                                                  | 75                      | 50                     | 100                    | <br>Width adjusting piece 调宽片<br>Connection bolt 连接螺栓<br>Cable Support 电缆桥架                              |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-150                                                                                                                                  |                         |                        | 150                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-200                                                                                                                                  |                         |                        | 200                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-300                                                                                                                                  |                         |                        | 300                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-400                                                                                                                                  |                         |                        | 400                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-500                                                                                                                                  |                         |                        | 500                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01A-600                                                                                                                                  |                         |                        | 600                    |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| XQJ-TPC-01B 调高片<br>Height adjusting piece XQJ-TPC-01B<br> | TPC-01B-75/100                                                                                                                               | 50                      | 75                     | 182                    | <br>Connection bolt 连接螺栓<br>调高片 Height adjusting piece<br>Cable Support 电缆桥架                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01B-75/150                                                                                                                               | 50                      | 125                    | 282                    |                                                                                                                                                                                             | 0.68                                                                                                                                                             |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01B-75/200                                                                                                                               | 50                      | 175                    |                        |                                                                                                                                                                                             | 1.10                                                                                                                                                             |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01B-100/150                                                                                                                              | 75                      | 125                    |                        |                                                                                                                                                                                             | 0.68                                                                                                                                                             |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01B-100/200                                                                                                                              | 75                      | 175                    | 1.10                   |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-01B-150/200                                                                                                                              | 125                     | 175                    | 382                    |                                                                                                                                                                                             | 1.10                                                                                                                                                             |                                                                                                                                                                  |         |    |
|                                                                                                                                            | XQJ-TPC-02 直接片<br>Straight Connection piece XQJ-TPC-02<br> | TPC-02-50               | 50、60                  | 182                    |                                                                                                                                                                                             | 35                                                                                                                                                               | DJ-TPC-02B100、150、200型<br>DJ-TPC-02B100、150、200Type<br><br>配套大跨距电缆桥架直接片      |         |    |
| TPC-02-75                                                                                                                                  |                                                                                                                                              | 75                      | 50                     |                        | 0.78                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-02-100                                                                                                                                 |                                                                                                                                              | 100                     | 75                     |                        | 1.10                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-02-125                                                                                                                                 |                                                                                                                                              | 125                     | 100                    |                        | 1.42                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-02-150                                                                                                                                 |                                                                                                                                              | 150                     | 382                    | 125                    | 2.17                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-02-200                                                                                                                                 |                                                                                                                                              | 200                     |                        | 175                    | 3.68                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| XQJ-TPC-03 弯接片<br>Bend Connection piece XQJ-TPC-03<br>  |                                                                                                                                              | TPC-03-50               | 25                     | 100                    | 150                                                                                                                                                                                         | <br>弯接片 Bend connection piece<br>电缆桥架 Cable Support<br>连接螺栓 Connection bolt |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-03-75                                                                                                                                    | 50                      | 120                    | 200                    | 0.62                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-03-100                                                                                                                                   | 75                      |                        | 200                    | 0.93                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-03-150                                                                                                                                   | 125                     | 120                    | 300                    | 2.75                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-03-200                                                                                                                                   | 175                     |                        | 300                    | 5.5                                                                                                                                                                                         |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | XQJ-TPC-04 调角片<br>Angle adjusting piece XQJ-TPC-04<br>    | TPC-04-75               | 75                     | 50                     | 166                                                                                                                                                                                         |                                                                                                                                                                  | <br>调角片 Angle adjusting piece<br>连接螺栓 Connection bolt<br>电缆桥架 Cable Support |         |    |
| TPC-04-100                                                                                                                                 |                                                                                                                                              | 100                     | 75                     | 191                    | 1.15                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-04-150                                                                                                                                 |                                                                                                                                              | 150                     | 125                    | 341                    | 2.12                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-04-200                                                                                                                                 |                                                                                                                                              | 200                     | 175                    | 391                    | 4.40                                                                                                                                                                                        |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| XQJ-TPC-05 固定压板<br>XQJ-TPC-05 Fixed holddown plate<br>  | TPC-05固定压板，主要用于梯级式桥架与托臂压固及梯级式桥架垂直安装时与墙壁固定<br>Model: TPC-05 fixed holddown plate                                                              |                         |                        |                        | <br>梯级式桥架 Ladder Support<br>连接螺栓 连接螺栓<br>固定压板 Fixed holddown plate<br>托臂 bracket                       |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| XQJ-TPC-07 隔板<br>XQJ-TPC-07 Partition plate<br>         | <br>隔板 隔板<br>连接螺栓 Connection bolt                         |                         |                        |                        | XQJ-TPC-13管接头<br>XQJ-TPC-13 Pipe connector<br><br>管接头 pipe connector<br>电缆桥架 Cable Support<br>引接管 Pipe |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | 型号 Model                                                                                                                                     | H <sub>1</sub><br>(mm)  | H <sub>2</sub><br>(mm) | 重量kg Weight            |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-07-75                                                                                                                                    | 40                      | 75                     | 4.18                   |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-07-100                                                                                                                                   | 75                      | 100                    | 4.18                   |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            | TPC-07-150                                                                                                                                   | 120                     | 150                    | 7.85                   |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
| TPC-07-200                                                                                                                                 | 170                                                                                                                                          | 200                     | 12.97                  |                        |                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                                                                  |         |    |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        | 型号 Model                                                                                                                                                                                    | G                                                                                                                                                                | M                                                                                                                                                                | D       |    |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        |                                                                                                                                                                                             | TPC-13-1/2"                                                                                                                                                      | 1/2"                                                                                                                                                             | M22×1   | 18 |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        |                                                                                                                                                                                             | TPC-13-3/4"                                                                                                                                                      | 3/4"                                                                                                                                                             | M27×1.5 | 22 |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        |                                                                                                                                                                                             | TPC-13-1"                                                                                                                                                        | 1"                                                                                                                                                               | M33×1.5 | 28 |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        |                                                                                                                                                                                             | TPC-13-1 1/2"                                                                                                                                                    | 1 1/2"                                                                                                                                                           | M48×2   | 38 |
|                                                                                                                                            |                                                                                                                                              |                         |                        |                        | TPC-13-2"                                                                                                                                                                                   | 2"                                                                                                                                                               | M56×2                                                                                                                                                            | 48      |    |






## 固定支架、悬吊式安装、引上、引下装置 Fixed support, suspension Type installation, Upword & Downward Leading Devices.

HAT-GYX型引下装置  
Vortical Hold Down Guides

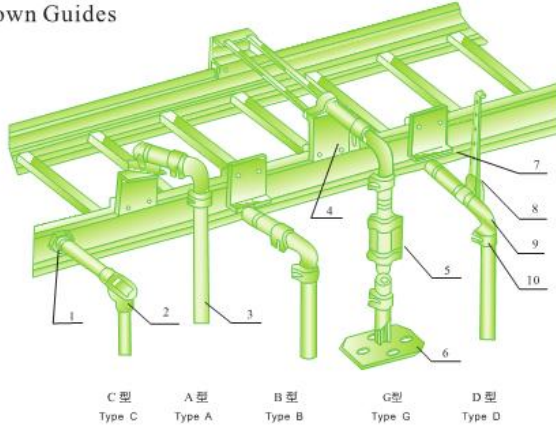


| 序号NO. | 产品名称 Name | 型号 Model   | 说明Directions                                                                                                                                                                                                                                                                                                                                                 |
|-------|-----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | 管接头       | XQJ-TPC-13 | GYX型引下装置, 广泛应用于工矿企业。当电缆桥架引至用电设备, 可通过该装置来实现, 除图中列出的A、B、C、D、G型外, 按用户需要可提供特殊类型的引下装置, 欢迎选购。<br><br>Model GYX downward leading devices are widely applied in mines and industrial units. They can well connect cable trays with electrical equipments. Aside from model A.B. C.D. G in figures, we can also provide you special types of downward leading devices |
| 2     | 铝合金穿线盒    | YIIX-E、T、S |                                                                                                                                                                                                                                                                                                                                                              |
| 3     | 钢管        | GG         |                                                                                                                                                                                                                                                                                                                                                              |
| 4     | 固定架       | GDJ2       |                                                                                                                                                                                                                                                                                                                                                              |
| 5     | 开关底座      | KGZ        |                                                                                                                                                                                                                                                                                                                                                              |
| 6     | 管座        | GZ         |                                                                                                                                                                                                                                                                                                                                                              |
| 7     | 固定架       | GDJ1       |                                                                                                                                                                                                                                                                                                                                                              |
| 8     | 吊杆        | DG2        |                                                                                                                                                                                                                                                                                                                                                              |
| 9     | 钢管弯头      | GWT        |                                                                                                                                                                                                                                                                                                                                                              |
| 10    | 钢管接头      | GT         |                                                                                                                                                                                                                                                                                                                                                              |

GG型钢管  
GG Steel tube




| 型号Model | D(mm) | 重量/米 (kg)<br>Weight/m | 备注Remarks                                                                                                       |
|---------|-------|-----------------------|-----------------------------------------------------------------------------------------------------------------|
| GG-25   | φ 25  | 2.69                  | 选型时不注明长度L, 按400mm供货。<br>While L is not specially indicated, we will supply products with their length of 400mm. |
| GG-40   | φ 40  | 4.62                  |                                                                                                                 |
| GG-50   | φ 50  | 5.90                  |                                                                                                                 |
| GG-60   | φ 60  | 7.18                  |                                                                                                                 |
| GG-80   | φ 80  | 12.02                 |                                                                                                                 |

GDJ<sub>2</sub>型固定架  
GDJ<sub>2</sub> Fixed frame




| 型号Model | D(mm) | 备注Remarks                                                                  |
|---------|-------|----------------------------------------------------------------------------|
| GDJ2-25 | φ 25  | 选型时请在型号内加注配套桥架高度H。<br>Please tell us the width H for cable tray at orrect. |
| GDJ2-40 | φ 40  |                                                                            |
| GDJ2-50 | φ 50  |                                                                            |
| GDJ2-60 | φ 60  |                                                                            |
| GDJ2-80 | φ 80  |                                                                            |

KGZ型开关底座  
KGZ Switch Foundation




| 型号Model | D(mm) | 备注Remarks                                                                                                                           |
|---------|-------|-------------------------------------------------------------------------------------------------------------------------------------|
| KGZ-25  | φ 25  | 选型时不注明仪表开关箱高度H, 按400mm供货。<br>While H of meter boxes is not specially indicated, we will supply products with their height of 400mm. |
| KGZ-40  | φ 40  |                                                                                                                                     |
| KGZ-50  | φ 50  |                                                                                                                                     |
| KGZ-60  | φ 60  |                                                                                                                                     |
| KGZ-80  | φ 80  |                                                                                                                                     |

GZ型管座  
GZ Tube Bases



| 型号Model | D(mm) | 备注Remarks                                                                                                       |
|---------|-------|-----------------------------------------------------------------------------------------------------------------|
| GZ1-25  | φ 25  | 选型时不注明高度H, 按500mm供货。<br>While H is not specially indicated, we will supply products with their height of 500mm. |
| GZ1-40  | φ 40  |                                                                                                                 |
| GZ1-50  | φ 50  |                                                                                                                 |
| GZ1-60  | φ 60  |                                                                                                                 |
| GZ1-80  | φ 80  |                                                                                                                 |

GDJ<sub>1</sub>型固定架  
GDJ<sub>1</sub> fixed frame




| 型号Model | D(mm) | 备注Remarks                                                                  |
|---------|-------|----------------------------------------------------------------------------|
| GDJ1-25 | φ 25  | 选型时请在型号内加注配套桥架高度H。<br>Please tell us the width H for cable tray at orrect. |
| GDJ1-40 | φ 40  |                                                                            |
| GDJ1-50 | φ 50  |                                                                            |
| GDJ1-60 | φ 60  |                                                                            |
| GDJ1-80 | φ 80  |                                                                            |

DG2型吊杆  
DG2 Hanper Rods




| 型号Model | L(mm) | 重量 (kg)<br>Weight | 备注Remarks |
|---------|-------|-------------------|-----------|
| DG2-5   | 500   | 1.21              |           |
| DG2-10  | 1000  | 2.04              |           |
| DG2-15  | 1500  | 3.27              |           |
| DG2-20  | 2000  | 4.42              |           |
| DG2-25  | 2500  | 5.53              |           |

GWT型钢管90°弯头  
GWT-Steel Tube Elbow



| 型号Model | D(mm) | R(mm) | 重量/米(kg)<br>Weight/m |
|---------|-------|-------|----------------------|
| GWT-25  | φ 25  | 300   | 2.69                 |
| GWT-40  | φ 40  | 300   | 4.62                 |
| GWT-50  | φ 50  | 500   | 5.90                 |
| GWT-60  | φ 60  | 500   | 7.18                 |
| GWT-80  | φ 80  | 500   | 12.02                |


GT型钢管接头  
GT Steel tube connectors



| 型号Model | D(mm) | 备注Remarks |
|---------|-------|-----------|
| GT-25   | φ 25  |           |
| GT-40   | φ 40  |           |
| GT-50   | φ 50  |           |
| GT-60   | φ 60  |           |
| GT-80   | φ 80  |           |

## 护罩 Cover


XQJ-TPC-08直通护罩  
Straight Cover Model XQJ-TPC-08

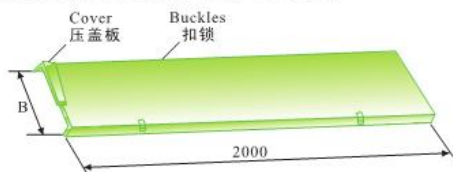

XQJ-TPC-09弯通护罩  
Elbow Joint Cover Model XQJ-TPC-09




XQJ-TPC-10三通护罩  
T-Joint Cover Model XQJ-TPC-10




XQJ-TPC-11四通护罩  
Cross Cover Model XQJ-TPC-11



ZQC-ZH-03吊杆  
ZQC-ZH-03 Suspending rod

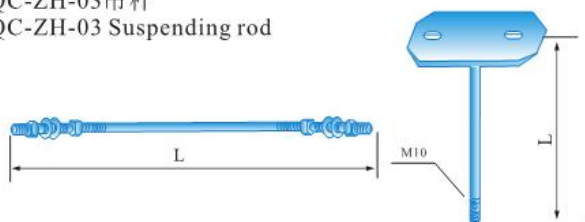

XQJ-C-01B桥架封头  
XQJ-C-01B Support end piece



| 序号<br>NO. | 型号<br>Model | 宽度b<br>Width | 重量kg (件)<br>Weight(piece) | 备注<br>Remarks |
|-----------|-------------|--------------|---------------------------|---------------|
| 1         | TPC-08-1    | 100          | 4.48                      |               |
| 2         | TPC-08-2    | 200          | 8.47                      |               |
| 3         | TPC-08-3    | 300          | 17.06                     |               |
| 4         | TPC-08-4    | 400          | 27.74                     |               |
| 5         | TPC-08-5    | 500          | 34.06                     |               |
| 6         | TPC-08-6    | 600          | 40.40                     |               |
| 7         | TPC-08-8    | 800          | 63.53                     |               |

| 序号<br>NO. | 型号<br>Model | 宽度b<br>Width | 重量kg (件)<br>Weight(piece) | 备注<br>Remarks |
|-----------|-------------|--------------|---------------------------|---------------|
| 1         | TPC-09-2    | 200          | 2.58                      |               |
| 2         | TPC-09-3    | 300          | 7.39                      |               |
| 3         | TPC-09-4    | 400          | 14.15                     |               |
| 4         | TPC-09-5    | 500          | 18.90                     |               |
| 5         | TPC-09-6    | 600          | 24.24                     |               |
| 6         | TPC-09-8    | 800          | 43.52                     |               |

| 序号<br>NO. | 型号<br>Model | 宽度b<br>Width | 重量kg (件)<br>Weight(piece) | 备注<br>Remarks |
|-----------|-------------|--------------|---------------------------|---------------|
| 1         | TPC-08-2    | 200          | 4.34                      |               |
| 2         | TPC-08-3    | 300          | 12.22                     |               |
| 3         | TPC-08-4    | 400          | 20.84                     |               |
| 4         | TPC-08-5    | 500          | 30.68                     |               |
| 5         | TPC-08-6    | 600          | 37.98                     |               |
| 6         | TPC-08-8    | 800          | 65.20                     |               |

| 序号<br>NO. | 型号<br>Model | 宽度b<br>Width | 重量kg (件)<br>Weight(piece) | 备注<br>Remarks |
|-----------|-------------|--------------|---------------------------|---------------|
| 1         | TPC-08-2    | 200          | 5.71                      |               |
| 2         | TPC-08-3    | 300          | 11.48                     |               |
| 3         | TPC-08-4    | 400          | 31.35                     |               |
| 4         | TPC-08-5    | 500          | 39.27                     |               |
| 5         | TPC-08-6    | 600          | 47.90                     |               |
| 6         | TPC-08-8    | 800          | 71.34                     |               |

| 序号<br>NO. | 型号<br>Model | 宽度b<br>Width | 重量kg (件)<br>Weight(piece) | 备注<br>Remarks |
|-----------|-------------|--------------|---------------------------|---------------|
| 1         | TPC-08-5    | 500          | 1.65                      |               |
| 2         | TPC-08-8    | 800          | 1.97                      |               |
| 3         | TPC-08-10   | 1000         | 2.14                      |               |
| 4         | TPC-08-12   | 1200         | 2.45                      |               |
| 5         | TPC-08-15   | 1500         | 2.66                      |               |
| 6         | TPC-08-20   | 2000         | 3.13                      |               |


| 序号<br>NO. | 型号<br>Model  | 重量kg (件)<br>Weight(piece) | 序号<br>NO. | 型号<br>Model  | 重量kg (件)<br>Weight(piece) |
|-----------|--------------|---------------------------|-----------|--------------|---------------------------|
| 1         | XQJ-C-01B-1  | 0.1                       | 11        | XQJ-C-01B-11 | 2.42                      |
| 2         | XQJ-C-01B-2  | 0.33                      | 12        | XQJ-C-01B-12 | 3.68                      |
| 3         | XQJ-C-01B-3  | 0.57                      | 13        | XQJ-C-01B-13 | 4.85                      |
| 4         | XQJ-C-01B-4  | 0.85                      | 14        | XQJ-C-01B-14 | 2.75                      |
| 5         | XQJ-C-01B-5  | 1.62                      | 15        | XQJ-C-01B-15 | 4.25                      |
| 6         | XQJ-C-01B-6  | 1.42                      | 16        | XQJ-C-01B-16 | 5.52                      |
| 7         | XQJ-C-01B-7  | 2.65                      | 17        | XQJ-C-01B-17 | 4.07                      |
| 8         | XQJ-C-01B-8  | 2.1                       | 18        | XQJ-C-01B-18 | 6.12                      |
| 9         | XQJ-C-01B-9  | 3.15                      | 19        | XQJ-C-01B-19 | 8.13                      |
| 10        | XQJ-C-01B-10 | 4.18                      |           |              |                           |




## XQJ大跨距电缆桥架 XQJ Type Large Span Cable Support

大跨距桥架分梯级式、槽式、托盘式三种形式。A型、B型二种型号，支撑间距6m，当跨距大于6m时可接受特殊订货。  
Large-span cable support-systems consist of 3 types,i.e.ladder type ,channel type and tray type.They are of 2 models,namely Model A and mModel B with the span between the supports being 6m,Special order will be accepted when the span exceeds 6m.


XQJ-DJ-T-A-01型梯级式大跨距汇线桥架  
XQJ-DJ-T-A-01 Type Stair Large-span Bridge Frame

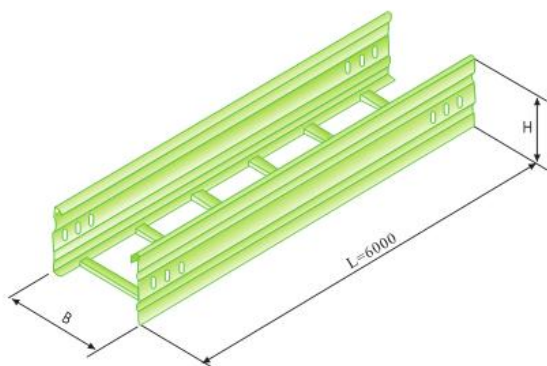

XQJ-DJ-T-B-01型梯级式大跨距汇线桥架  
XQJ-DJ-T-B-01 Type Stair Large-span Bridge Frame

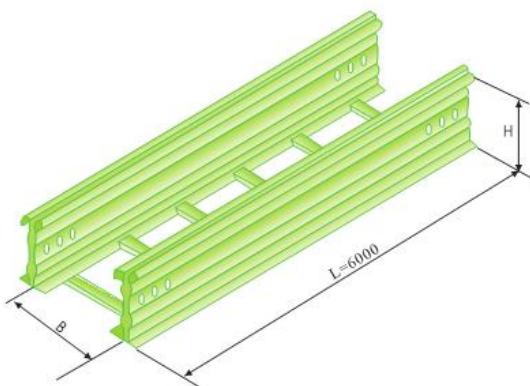

XQJ-DJ-P-A-01型托盘式大跨距汇线桥架  
XQJ-DJ-P-A-01 Type Stair Large-span Bridge Frame

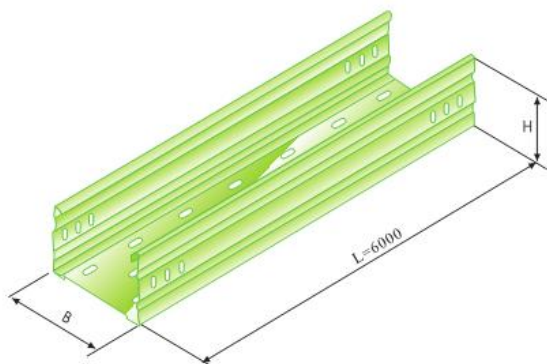

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-T-A-01-10-2 | 100   | 200   | 55.60       |
| DJ-T-A-01-10-3 |       | 300   | 60.37       |
| DJ-T-A-01-10-4 |       | 400   | 76.71       |
| DJ-T-A-01-10-5 |       | 500   | 81.48       |
| DJ-T-A-01-10-6 |       | 600   | 86.26       |
| DJ-T-A-01-10-8 |       | 800   | 116.08      |
| DJ-T-A-01-15-2 | 150   | 200   | 70.92       |
| DJ-T-A-01-15-3 |       | 300   | 76.69       |
| DJ-T-A-01-15-4 |       | 400   | 95.87       |
| DJ-T-A-01-15-5 |       | 500   | 100.66      |
| DJ-T-A-01-15-6 |       | 600   | 105.45      |
| DJ-T-A-01-15-8 |       | 800   | 138.11      |
| DJ-T-A-01-20-2 | 200   | 200   | 86.27       |
| DJ-T-A-01-20-3 |       | 300   | 91.05       |
| DJ-T-A-01-20-4 |       | 400   | 119.89      |
| DJ-T-A-01-20-5 |       | 500   | 124.68      |
| DJ-T-A-01-20-6 |       | 600   | 129.47      |
| DJ-T-A-01-20-8 |       | 800   | 160.68      |

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-T-B-01-10-2 | 100   | 200   | 101.56      |
| DJ-T-B-01-10-3 |       | 300   | 106.34      |
| DJ-T-B-01-10-4 |       | 400   | 134.18      |
| DJ-T-B-01-10-5 |       | 500   | 138.95      |
| DJ-T-B-01-10-6 |       | 600   | 143.73      |
| DJ-T-B-01-10-8 |       | 800   | 162.79      |
| DJ-T-B-01-15-2 | 150   | 200   | 132.19      |
| DJ-T-B-01-15-3 |       | 300   | 136.97      |
| DJ-T-B-01-15-4 |       | 400   | 172.50      |
| DJ-T-B-01-15-5 |       | 500   | 177.27      |
| DJ-T-B-01-15-6 |       | 600   | 182.06      |
| DJ-T-B-01-15-8 |       | 800   | 228.35      |
| DJ-T-B-01-20-2 | 200   | 200   | 162.87      |
| DJ-T-B-01-20-3 |       | 300   | 167.65      |
| DJ-T-B-01-20-4 |       | 400   | 215.66      |
| DJ-T-B-01-20-5 |       | 500   | 220.45      |
| DJ-T-B-01-20-6 |       | 600   | 225.23      |
| DJ-T-B-01-20-8 |       | 800   | 273.48      |


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-P-A-01-10-2 | 100   | 200   | 68.34       |
| DJ-P-A-01-10-3 |       | 300   | 91.55       |
| DJ-P-A-01-10-4 |       | 400   | 133.48      |
| DJ-P-A-01-10-5 |       | 500   | 152.45      |
| DJ-P-A-01-10-6 |       | 600   | 171.45      |
| DJ-P-A-01-10-8 |       | 800   | 239.40      |
| DJ-P-A-01-15-2 | 150   | 200   | 91.66       |
| DJ-P-A-01-15-3 |       | 300   | 106.85      |
| DJ-P-A-01-15-4 |       | 400   | 152.61      |
| DJ-P-A-01-15-5 |       | 500   | 171.61      |
| DJ-P-A-01-15-6 |       | 600   | 190.61      |
| DJ-P-A-01-15-8 |       | 800   | 272.18      |
| DJ-P-A-01-20-2 | 200   | 200   | 106.98      |
| DJ-P-A-01-20-3 |       | 300   | 122.18      |
| DJ-P-A-01-20-4 |       | 400   | 171.95      |
| DJ-P-A-01-20-5 |       | 500   | 190.76      |
| DJ-P-A-01-20-6 |       | 600   | 209.76      |
| DJ-P-A-01-20-8 |       | 800   | 293.97      |


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

## XQJ大跨距电缆桥架 XQJ Type Large Span Cable Support


XQJ-DJ-P-B-01型托盘式大跨距汇线桥架  
XQJ-DJ-P-B-01 Type Stair Large-span Bridge Frame

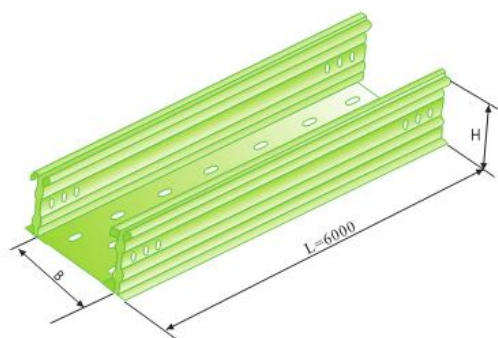

XQJ-DJ-C-A-01型槽式大跨距汇线桥架  
XQJ-DJ-C-A-01 Type Stair Large-span Bridge Frame

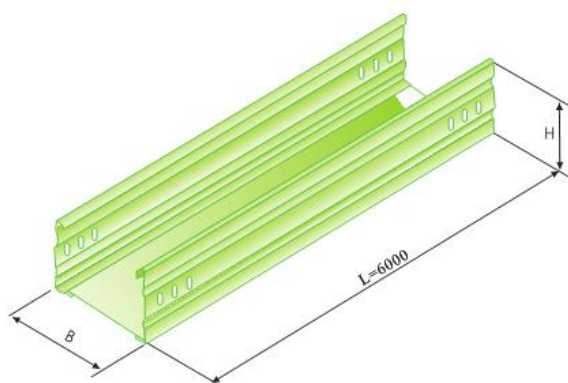

XQJ-DJ-C-B-01型槽式大跨距汇线桥架  
XQJ-DJ-C-B-01 Type Stair Large-span Bridge Frame

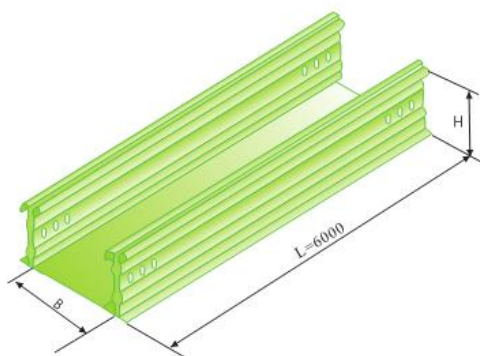

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-P-B-01-10-2 | 100   | 200   | 114.31      |
| DJ-P-B-01-10-3 |       | 300   | 137.52      |
| DJ-P-B-01-10-4 |       | 400   | 190.95      |
| DJ-P-B-01-10-5 |       | 500   | 209.92      |
| DJ-P-B-01-10-6 |       | 600   | 228.92      |
| DJ-P-B-01-10-8 |       | 800   | 306.76      |
| DJ-P-B-01-15-2 | 150   | 200   | 152.94      |
| DJ-P-B-01-15-3 |       | 300   | 168.13      |
| DJ-P-B-01-15-4 |       | 400   | 229.24      |
| DJ-P-B-01-15-5 |       | 500   | 248.24      |
| DJ-P-B-01-15-6 |       | 600   | 267.24      |
| DJ-P-B-01-15-8 |       | 800   | 362.42      |
| DJ-P-B-01-20-2 | 200   | 200   | 183.58      |
| DJ-P-B-01-20-3 |       | 300   | 198.77      |
| DJ-P-B-01-20-4 |       | 400   | 267.73      |
| DJ-P-B-01-20-5 |       | 500   | 286.53      |
| DJ-P-B-01-20-6 |       | 600   | 305.53      |
| DJ-P-B-01-20-8 |       | 800   | 406.77      |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-C-A-01-10-2 | 100   | 200   | 68.34       |
| DJ-C-A-01-10-3 |       | 300   | 91.55       |
| DJ-C-A-01-10-4 |       | 400   | 133.48      |
| DJ-C-A-01-10-5 |       | 500   | 152.45      |
| DJ-C-A-01-10-6 |       | 600   | 171.45      |
| DJ-C-A-01-10-8 |       | 800   | 239.40      |
| DJ-C-A-01-15-2 | 150   | 200   | 91.66       |
| DJ-C-A-01-15-3 |       | 300   | 106.85      |
| DJ-C-A-01-15-4 |       | 400   | 152.61      |
| DJ-C-A-01-15-5 |       | 500   | 171.61      |
| DJ-C-A-01-15-6 |       | 600   | 190.61      |
| DJ-C-A-01-15-8 |       | 800   | 272.18      |
| DJ-C-A-01-20-2 | 200   | 200   | 106.98      |
| DJ-C-A-01-20-3 |       | 300   | 122.18      |
| DJ-C-A-01-20-4 |       | 400   | 171.95      |
| DJ-C-A-01-20-5 |       | 500   | 190.76      |
| DJ-C-A-01-20-6 |       | 600   | 209.76      |
| DJ-C-A-01-20-8 |       | 800   | 293.97      |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 型号Model        | H(mm) | B(mm) | 重量kg Weight |
|----------------|-------|-------|-------------|
| DJ-C-B-01-10-2 | 100   | 200   | 114.31      |
| DJ-C-B-01-10-3 |       | 300   | 137.52      |
| DJ-C-B-01-10-4 |       | 400   | 186.11      |
| DJ-C-B-01-10-5 |       | 500   | 209.92      |
| DJ-C-B-01-10-6 |       | 600   | 228.92      |
| DJ-C-B-01-10-8 |       | 800   | 306.76      |
| DJ-C-B-01-15-2 | 150   | 200   | 152.94      |
| DJ-C-B-01-15-3 |       | 300   | 168.13      |
| DJ-C-B-01-15-4 |       | 400   | 229.24      |
| DJ-C-B-01-15-5 |       | 500   | 248.24      |
| DJ-C-B-01-15-6 |       | 600   | 267.24      |
| DJ-C-B-01-15-8 |       | 800   | 362.42      |
| DJ-C-B-01-20-2 | 200   | 200   | 183.58      |
| DJ-C-B-01-20-3 |       | 300   | 198.77      |
| DJ-C-B-01-20-4 |       | 400   | 267.73      |
| DJ-C-B-01-20-5 |       | 500   | 286.53      |
| DJ-C-B-01-20-6 |       | 600   | 305.53      |
| DJ-C-B-01-20-8 |       | 800   | 406.77      |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes



# XQJ电缆桥架型号表示法


## XQJ Cable Support Accessories

电缆桥架型号表示方法 Model expressing method of cable bridge frame From Classification Standard

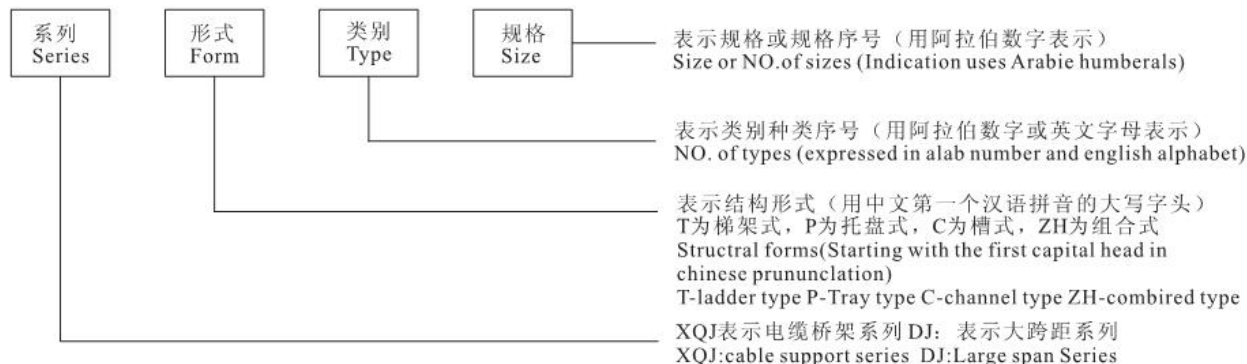


电缆桥架空间布置示意图 Cable bridge frame space arrangement


梯级式电缆桥架空间布置示意图  
Spatial schematic map for ladder type cable support

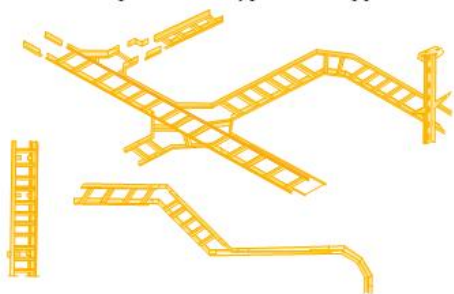

托盘式桥架空间布置示意图  
Spatial schematic map for tray type cable support

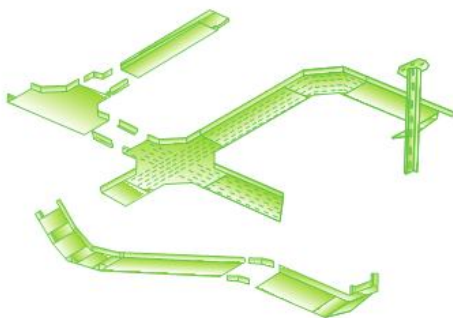


槽式桥架空间布置示意图  
Spatial schematic map for channel type cable support

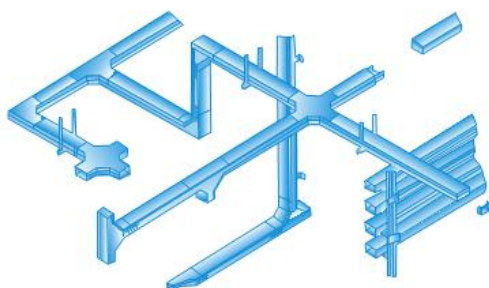


电缆桥架载荷曲线 Load curve for cable supports

DJ-T、P、C型大跨距电缆桥架载荷曲线  
The large-span cable bridge frame load curve  
I型均布载荷 kg/m (II型均布载荷 kg/m为1.8倍)  
Balanced load kg/m for model I (for model II, the load is 1.8 times of model II)

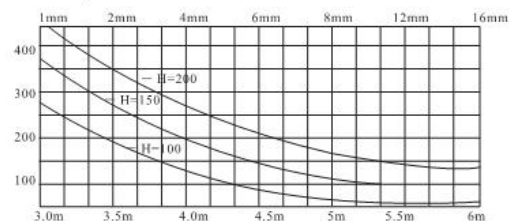


跨距(m) span(m)

XQJ-T、P型电缆桥架载荷曲线  
Load curve for Type XQJ-T、P cable support  
均布载荷 kg/m Distributed load kg/m

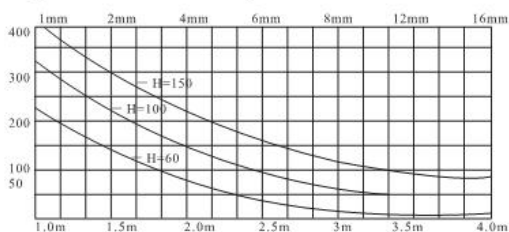

跨距(m) span(m)

XQJ-C型电缆桥架载荷曲线  
Load curve for Type XQJ-C cable support  
均布载荷 kg/m Distributed load kg/m

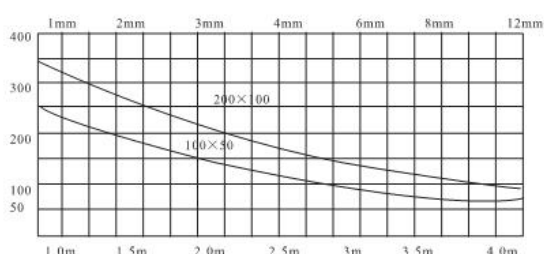


跨距(m) span(m)


## XQJ槽式电缆桥架 XQJ Channel-type Support

槽式电缆桥架是一种全封闭式电缆桥架,它是适用于敷设计算机、通信电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果。  
The channel-type cable support system is fully enclosed cable support system. It is applicable for laying computer cables, communication cables, thermocouple cables and control cables of highly-sensitive systems. It works well in resisting interference of control cable shield and protecting the cables in seriously corrosive environment.


XQJ-C-1A槽式直通  
XQJ-C-1A Straight-way trough-type

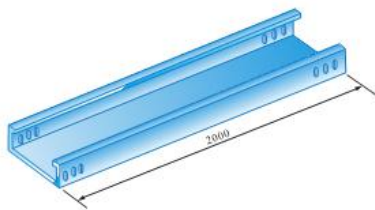

XQJ-C-2A水平弯通  
XQJ-C-2A Horizontal Curved

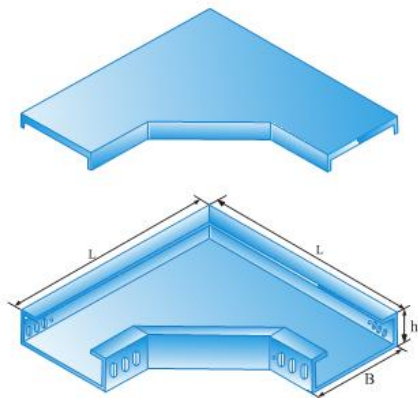

XQJ-C-3A水平三通  
XQJ-C-3A Horizontal 3-Way

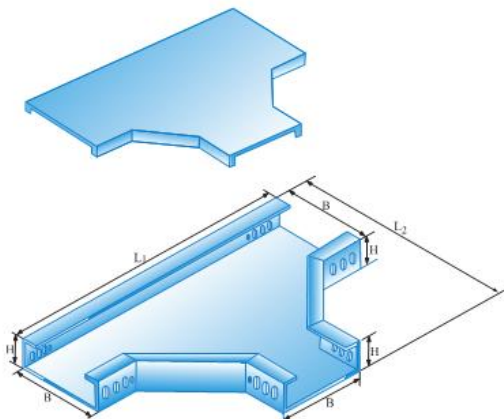

| 序号NO. | 型号Model | 规格Size  | 重量Weight |
|-------|---------|---------|----------|
| 1     | C-1A-1  | 50×25   | 6.71     |
| 2     | C-1A-2  | 100×50  | 12.50    |
| 3     | C-1A-3  | 150×75  | 18.27    |
| 4     | C-1A-4  | 200×100 | 26.13    |
| 5     | C-1A-5  | 250×125 | 40.61    |
| 6     | C-1A-6  | 300×100 | 43.66    |
| 7     | C-1A-7  | 300×150 | 48.73    |
| 8     | C-1A-8  | 400×100 | 67.13    |
| 9     | C-1A-9  | 400×150 | 73.45    |
| 10    | C-1A-10 | 400×200 | 79.85    |
| 11    | C-1A-11 | 500×100 | 79.66    |
| 12    | C-1A-12 | 500×150 | 86.00    |
| 13    | C-1A-13 | 500×200 | 92.32    |
| 14    | C-1A-14 | 600×100 | 92.32    |
| 15    | C-1A-15 | 600×150 | 99.47    |
| 16    | C-1A-16 | 600×200 | 104.98   |
| 17    | C-1A-17 | 800×100 | 156.47   |
| 18    | C-1A-18 | 800×150 | 164.05   |
| 19    | C-1A-19 | 800×200 | 171.63   |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格Size  | L (mm) | 重量Weight |
|-------|---------|---------|--------|----------|
| 1     | C-2A-1  | 50×25   | 150    | 1.49     |
| 2     | C-2A-2  | 100×50  | 300    | 3.23     |
| 3     | C-2A-3  | 150×75  | 350    | 8.44     |
| 4     | C-2A-4  | 200×100 | 450    | 11.48    |
| 5     | C-2A-5  | 250×125 | 500    | 13.56    |
| 6     | C-2A-6  | 300×100 | 650    | 22.56    |
| 7     | C-2A-7  | 300×150 |        | 27.05    |
| 8     | C-2A-8  | 400×100 | 800    | 31.17    |
| 9     | C-2A-9  | 400×150 |        | 37.24    |
| 10    | C-2A-10 | 400×200 |        | 41.61    |
| 11    | C-2A-11 | 500×100 | 900    | 43.29    |
| 12    | C-2A-12 | 500×150 |        | 47.18    |
| 13    | C-2A-13 | 500×200 |        | 51.37    |
| 14    | C-2A-14 | 600×100 | 1000   | 56.21    |
| 15    | C-2A-15 | 600×150 |        | 59.96    |
| 16    | C-2A-16 | 600×200 |        | 62.51    |
| 17    | C-2A-17 | 800×100 | 1200   | 69.49    |
| 18    | C-2A-18 | 800×150 |        | 75.42    |
| 19    | C-2A-19 | 800×200 |        | 86.55    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格Size  | (mm)           |                | 重量Weight |
|-------|---------|---------|----------------|----------------|----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |          |
| 1     | C-3A-1  | 50×25   | 250            | 150            | 2.50     |
| 2     | C-3A-2  | 100×50  | 500            | 300            | 4.95     |
| 3     | C-3A-3  | 150×75  | 550            | 350            | 11.75    |
| 4     | C-3A-4  | 200×100 | 700            | 400            | 16.07    |
| 5     | C-3A-5  | 250×125 | 750            | 500            | 18.60    |
| 6     | C-3A-6  | 300×100 | 1000           | 650            | 26.72    |
| 7     | C-3A-7  | 300×150 |                |                | 33.92    |
| 8     | C-3A-8  | 400×100 |                |                | 39.12    |
| 9     | C-3A-9  | 400×150 | 1200           | 800            | 48.96    |
| 10    | C-3A-10 | 400×200 |                |                | 54.23    |
| 11    | C-3A-11 | 500×100 |                |                | 58.42    |
| 12    | C-3A-12 | 500×150 | 1300           | 900            | 61.15    |
| 13    | C-3A-13 | 500×200 |                |                | 65.51    |
| 14    | C-3A-14 | 600×100 |                |                | 67.14    |
| 15    | C-3A-15 | 600×150 | 1400           | 1000           | 71.65    |
| 16    | C-3A-16 | 600×200 |                |                | 77.70    |
| 17    | C-3A-17 | 800×100 |                |                | 86.78    |
| 18    | C-3A-18 | 800×150 | 1600           | 1200           | 94.46    |
| 19    | C-3A-19 | 800×200 |                |                | 103.67   |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes






## XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-4A水平四通  
XQJ-C-4AHorizontal 4-Way

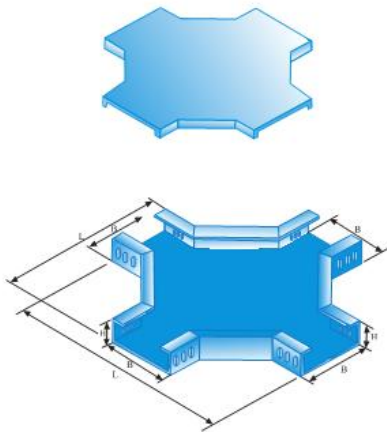

XQJ-C-4B上垂直等径四通  
XQJ-C-4BVertical equal sectional Tee

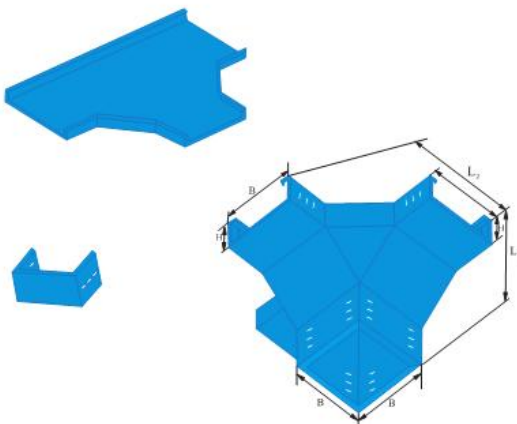

XQJ-C-06A、B、C、D型异径接头  
XQJ-C-06A、B、C、D Vmodel Reducer

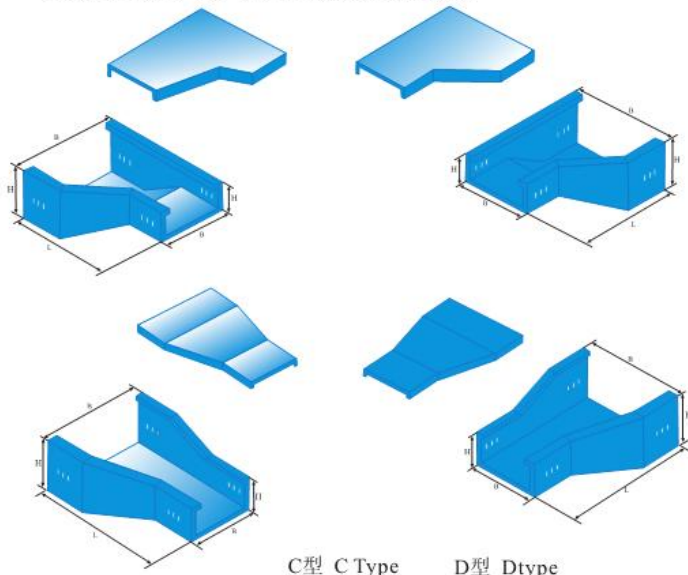

C型 C Type

D型 D type

| 序号<br>NO. | 型号Model | 规格Size  | L(mm) | 重量 Weight |
|-----------|---------|---------|-------|-----------|
| 1         | C-4A-1  | 50×25   | 250   | 2.84      |
| 2         | C-4A-2  | 100×50  | 500   | 6.89      |
| 3         | C-4A-3  | 150×75  | 550   | 17.06     |
| 4         | C-4A-4  | 200×100 | 700   | 21.56     |
| 5         | C-4A-5  | 250×125 | 750   | 24.81     |
| 6         | C-4A-6  | 300×100 | 1000  | 34.42     |
| 7         | C-4A-7  | 300×150 |       | 43.24     |
| 8         | C-4A-8  | 400×100 | 1200  | 48.23     |
| 9         | C-4A-9  | 400×150 |       | 60.45     |
| 10        | C-4A-10 | 400×200 | 1300  | 67.49     |
| 11        | C-4A-11 | 500×100 |       | 69.79     |
| 12        | C-4A-12 | 500×150 |       | 73.97     |
| 13        | C-4A-13 | 500×200 | 1400  | 79.89     |
| 14        | C-4A-14 | 600×100 |       | 80.82     |
| 15        | C-4A-15 | 600×150 |       | 81.69     |
| 16        | C-4A-16 | 600×200 | 1600  | 93.72     |
| 17        | C-4A-17 | 800×100 |       | 97.26     |
| 18        | C-4A-18 | 800×150 |       | 108.15    |
| 19        | C-4A-19 | 800×200 |       | 114.28    |

说明: 高度h=60, 100为单排连接孔, h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号<br>Number | 型号Model | 规格Size  | L(mm) |      |     | 重量<br>Weight |
|--------------|---------|---------|-------|------|-----|--------------|
|              |         |         | L1    | L2   | L3  |              |
| 1            | C-4A-1  | 50×25   | 250   | 150  | 125 | 2.81         |
| 2            | C-4A-2  | 100×50  | 500   | 300  | 250 | 5.88         |
| 3            | C-4A-3  | 150×75  | 550   | 350  | 275 | 15.40        |
| 4            | C-4A-4  | 200×100 | 700   | 450  | 350 | 18.97        |
| 5            | C-4A-5  | 250×125 | 750   | 500  | 375 | 23.19        |
| 6            | C-4A-6  | 300×100 | 900   | 600  | 400 | 30.12        |
| 7            | C-4A-7  | 300×150 | 1000  | 650  | 500 | 42.33        |
| 8            | C-4A-8  | 400×100 | 1000  | 750  | 450 | 39.78        |
| 9            | C-4A-9  | 400×150 | 1100  | 750  | 500 | 50.90        |
| 10           | C-4A-10 | 400×200 | 1200  | 800  | 600 | 66.23        |
| 11           | C-4A-11 | 500×100 | 1100  | 800  | 400 | 69.52        |
| 12           | C-4A-12 | 500×150 | 1200  | 850  | 500 | 72.25        |
| 13           | C-4A-13 | 500×200 | 1300  | 900  | 600 | 78.53        |
| 14           | C-4A-14 | 600×100 | 1200  | 900  | 400 | 81.82        |
| 15           | C-4A-15 | 600×150 | 1300  | 950  | 500 | 85.63        |
| 16           | C-4A-16 | 600×200 | 1400  | 1000 | 600 | 91.42        |
| 17           | C-4A-17 | 800×100 | 1400  | 1100 | 400 | 98.62        |
| 18           | C-4A-18 | 800×150 | 1500  | 1150 | 500 | 107.48       |
| 19           | C-4A-19 | 800×200 | 1600  | 1200 | 600 | 118.67       |


说明: 高度h=60, 100为单排连接孔, h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 型号<br>Model | 序号<br>NO. | 规格Size<br>A1×B1-A2×B2 | 重量kg<br>Weight | 序号<br>NO. | 规格Size<br>A1×B1-A2×B2 | 重量<br>Weight |
|-------------|-----------|-----------------------|----------------|-----------|-----------------------|--------------|
| C-5A        | 1         | 50×5-100×50           | 4.82           | 24        | 150×75-800×200        | 29.39        |
|             | 2         | 50×25-150×75          | 5.31           | 25        | 200×100-250×125       | 7.01         |
|             | 3         | 50×25-200×100         | 6.33           | 26        | 200×100-300×150       | 9.03         |
|             | 4         | 50×25-250×125         | 7.19           | 27        | 200×100-400×200       | 14.19        |
|             | 5         | 50×25-300×150         | 9.61           | 28        | 200×100-500×200       | 17.38        |
|             | 6         | 50×25-400×200         | 14.54          | 29        | 200×100-600×200       | 20.93        |
|             | 7         | 50×25-500×200         | 17.57          | 30        | 200×100-800×200       | 29.11        |
|             | 8         | 50×25-600×200         | 21.15          | 31        | 250×125-300×150       | 8.89         |
| C-5B        | 9         | 50×25-800×200         | 28.77          | 32        | 250×125-400×200       | 13.70        |
|             | 10        | 100×50-150×75         | 5.45           | 33        | 250×125-500×200       | 16.96        |
| C-5C        | 11        | 100×50-200×100        | 6.50           | 34        | 250×125-300×150       | 20.74        |
|             | 12        | 100×50-250×125        | 7.34           | 35        | 250×125-300×150       | 28.96        |
| C-5D        | 13        | 100×50-300×150        | 9.75           | 36        | 300×125-400×200       | 14.86        |
|             | 14        | 100×50-400×200        | 14.77          | 37        | 300×125-500×200       | 18.19        |
|             | 15        | 100×50-500×200        | 17.85          | 38        | 300×125-600×200       | 21.88        |
|             | 16        | 100×50-600×200        | 21.29          | 39        | 300×125-800×200       | 30.35        |
|             | 17        | 100×50-800×200        | 29.23          | 40        | 400×200-500×200       | 17.01        |
|             | 18        | 150×75-200×100        | 6.34           | 41        | 400×200-600×200       | 20.86        |
|             | 19        | 150×75-250×125        | 7.19           | 42        | 400×200-800×200       | 25.74        |
|             | 20        | 150×75-300×150        | 9.61           | 43        | 400×200-600×200       | 18.87        |
|             | 21        | 150×75-400×200        | 14.59          | 44        | 400×200-800×200       | 25.00        |
|             | 22        | 150×75-500×200        | 17.76          | 45        | 400×200-800×200       | 27.51        |
|             | 23        | 150×75-600×250        | 21.23          |           |                       |              |


说明: 高度h=60, 100为单排连接孔, h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

## XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3G下角垂直等径三通  
XQJ-C-3G Downward corner vertical equal sectional Tee

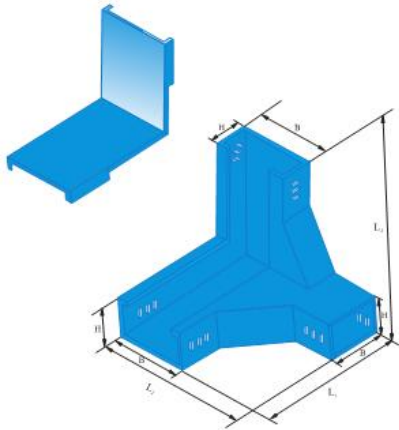

XQJ-C-3B上垂直等径三通  
XQJ-C-3B Vertical equal sectional Tee

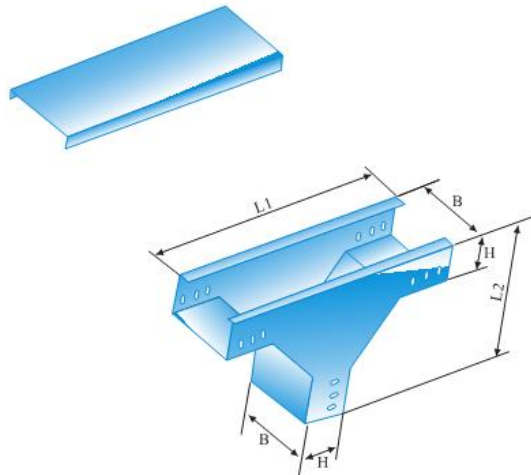

XQJ-C-3C下垂直等径三通  
XQJ-C-3C Downward vertical equal sectional Tee

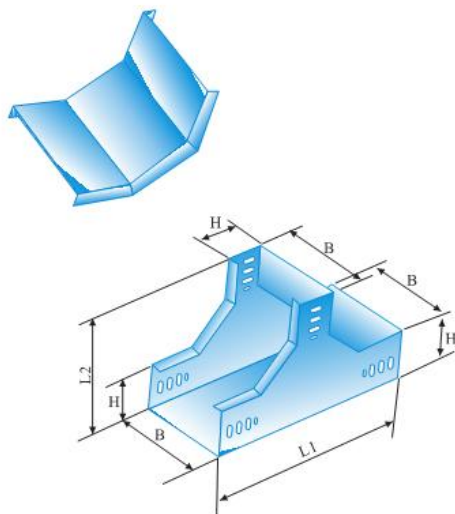

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-3G-1  | 50×25   | 150            | 125            | 2.18      |
| 2     | C-3G-2  | 100×50  | 300            | 250            | 4.38      |
| 3     | C-3G-3  | 150×75  | 350            | 275            | 11.49     |
| 4     | C-3G-4  | 200×100 | 450            | 350            | 14.38     |
| 5     | C-3G-5  | 250×125 | 500            | 370            | 15.76     |
| 6     | C-3G-6  | 300×100 | 600            | 400            | 25.59     |
| 7     | C-3G-7  | 300×150 | 650            | 500            | 32.90     |
| 8     | C-3G-8  | 400×100 | 700            | 400            | 37.69     |
| 9     | C-3G-9  | 400×150 | 750            | 500            | 42.36     |
| 10    | C-3G-10 | 400×200 | 800            | 600            | 52.05     |
| 11    | C-3G-11 | 500×100 | 800            | 400            | 54.54     |
| 12    | C-3G-12 | 500×150 | 850            | 500            | 56.28     |
| 13    | C-3G-13 | 500×200 | 900            | 600            | 62.16     |
| 14    | C-3G-14 | 600×100 | 900            | 400            | 65.59     |
| 15    | C-3G-15 | 600×150 | 950            | 500            | 67.38     |
| 16    | C-3G-16 | 600×200 | 1000           | 600            | 72.04     |
| 17    | C-3G-17 | 800×100 | 1000           | 400            | 85.12     |
| 18    | C-3G-18 | 800×150 | 1150           | 500            | 87.78     |
| 19    | C-3G-19 | 800×200 | 1200           | 600            | 93.46     |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-3B-1  | 50×25   | 225            | 125            | 2.03      |
| 2     | C-3B-2  | 100×50  | 450            | 250            | 3.46      |
| 3     | C-3B-3  | 150×75  | 475            | 275            | 11.47     |
| 4     | C-3B-4  | 200×100 | 600            | 350            | 13.34     |
| 5     | C-3B-5  | 250×125 | 625            | 375            | 16.12     |
| 6     | C-3B-6  | 300×100 | 700            | 400            | 23.86     |
| 7     | C-3B-7  | 300×150 | 850            | 500            | 27.12     |
| 8     | C-3B-8  | 400×100 | 800            | 450            | 29.48     |
| 9     | C-3B-9  | 400×150 | 850            | 500            | 31.61     |
| 10    | C-3B-10 | 400×200 | 1000           | 600            | 37.22     |
| 11    | C-3B-11 | 500×100 | 900            | 500            | 50.21     |
| 12    | C-3B-12 | 500×150 | 950            | 550            | 52.80     |
| 13    | C-3B-13 | 500×200 | 1000           | 600            | 53.41     |
| 14    | C-3B-14 | 600×100 | 900            | 500            | 55.68     |
| 15    | C-3B-15 | 600×150 | 950            | 550            | 58.70     |
| 16    | C-3B-16 | 600×200 | 1000           | 600            | 60.04     |
| 17    | C-3B-17 | 800×100 | 900            | 500            | 63.28     |
| 18    | C-3B-18 | 800×150 | 950            | 550            | 67.86     |
| 19    | C-3B-19 | 800×200 | 1000           | 600            | 72.40     |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes


| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-3C-1  | 50×25   | 225            | 125            | 2.04      |
| 2     | C-3C-2  | 100×50  | 450            | 250            | 3.96      |
| 3     | C-3C-3  | 150×75  | 475            | 275            | 10.85     |
| 4     | C-3C-4  | 200×100 | 600            | 350            | 13.34     |
| 5     | C-3C-5  | 250×125 | 625            | 375            | 16.26     |
| 6     | C-3C-6  | 300×100 | 700            | 400            | 23.81     |
| 7     | C-3C-7  | 300×150 | 850            | 500            | 29.96     |
| 8     | C-3C-8  | 400×100 | 800            | 450            | 30.24     |
| 9     | C-3C-9  | 400×150 | 850            | 500            | 35.42     |
| 10    | C-3C-10 | 400×200 | 1000           | 600            | 46.54     |
| 11    | C-3C-11 | 500×100 | 900            | 500            | 49.37     |
| 12    | C-3C-12 | 500×150 | 950            | 550            | 50.18     |
| 13    | C-3C-13 | 500×200 | 1000           | 600            | 52.61     |
| 14    | C-3C-14 | 600×100 | 900            | 500            | 53.84     |
| 15    | C-3C-15 | 600×150 | 950            | 550            | 55.45     |
| 16    | C-3C-16 | 600×200 | 1000           | 600            | 58.78     |
| 17    | C-3C-17 | 800×100 | 900            | 500            | 66.28     |
| 18    | C-3C-18 | 800×150 | 950            | 550            | 68.90     |
| 19    | C-3C-19 | 800×200 | 1000           | 600            | 71.24     |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes




## XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2B垂直等径上弯通  
XQJ-C-2B Vertical equal sectional upward bend

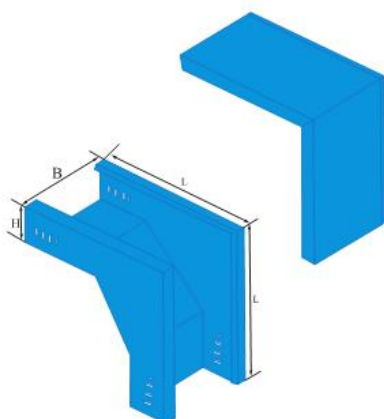

XQJ-C-2C垂直等径下弯通  
XQJ-C-2C Vertical equal sectional downward bend

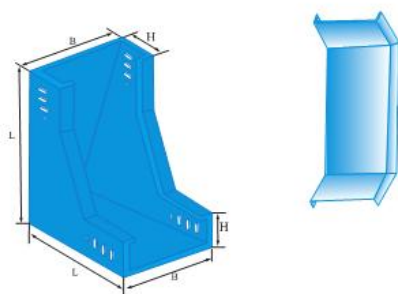

XQJ-C-2D垂直等径左下弯通  
XQJ-C-2D Vertical equal sectional left downward bend

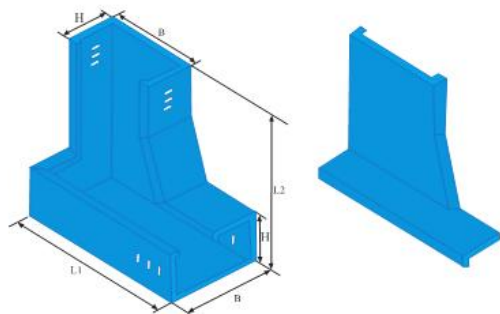

| 序号NO. | 型号Model | 规格 Size | L(mm) | 重量Weight |
|-------|---------|---------|-------|----------|
| 1     | C-2B-1  | 50×25   | 125   | 1.46     |
| 2     | C-2B-2  | 100×50  | 250   | 3.82     |
| 3     | C-2B-3  | 150×75  | 275   | 7.63     |
| 4     | C-2B-4  | 200×100 | 350   | 9.62     |
| 5     | C-2B-5  | 250×125 | 375   | 12.44    |
| 6     | C-2B-6  | 300×100 | 400   | 18.86    |
| 7     | C-2B-7  | 300×150 | 500   | 21.86    |
| 8     | C-2B-8  | 400×100 | 400   | 23.89    |
| 9     | C-2B-9  | 400×150 | 500   | 27.43    |
| 10    | C-2B-10 | 400×200 | 600   | 32.15    |
| 11    | C-2B-11 | 500×100 | 500   | 32.86    |
| 12    | C-2B-12 | 500×150 | 600   | 32.62    |
| 13    | C-2B-13 | 500×200 | 600   | 34.19    |
| 14    | C-2B-14 | 600×100 | 600   | 41.86    |
| 15    | C-2B-15 | 600×150 | 600   | 44.61    |
| 16    | C-2B-16 | 600×200 | 600   | 46.90    |
| 17    | C-2B-17 | 800×100 | 600   | 51.26    |
| 18    | C-2B-18 | 800×150 | 600   | 53.86    |
| 19    | C-2B-19 | 800×200 | 600   | 56.83    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格 Size | L(mm) | 重量Weight |
|-------|---------|---------|-------|----------|
| 1     | C-2C-1  | 50×25   | 125   | 1.39     |
| 2     | C-2C-2  | 100×50  | 250   | 3.21     |
| 3     | C-2C-3  | 150×75  | 275   | 8.04     |
| 4     | C-2C-4  | 200×100 | 350   | 9.74     |
| 5     | C-2C-5  | 250×125 | 375   | 12.36    |
| 6     | C-2C-6  | 300×100 | 400   | 15.02    |
| 7     | C-2C-7  | 300×150 | 500   | 21.48    |
| 8     | C-2C-8  | 400×100 | 400   | 23.40    |
| 9     | C-2C-9  | 400×150 | 500   | 30.50    |
| 10    | C-2C-10 | 400×200 | 600   | 36.52    |
| 11    | C-2C-11 | 500×100 | 500   | 38.16    |
| 12    | C-2C-12 | 500×150 | 600   | 39.21    |
| 13    | C-2C-13 | 500×200 | 600   | 41.47    |
| 14    | C-2C-14 | 600×100 | 600   | 43.79    |
| 15    | C-2C-15 | 600×150 | 600   | 45.89    |
| 16    | C-2C-16 | 600×200 | 600   | 46.32    |
| 17    | C-2C-17 | 800×100 | 600   | 49.58    |
| 18    | C-2C-18 | 800×150 | 600   | 53.28    |
| 19    | C-2C-19 | 800×200 | 600   | 56.13    |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量Weight |
|-------|---------|---------|----------------|----------------|----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |          |
| 1     | C-2D-1  | 50×25   | 150            | 125            | 1.37     |
| 2     | C-2D-2  | 100×50  | 300            | 250            | 3.98     |
| 3     | C-2D-3  | 150×75  | 350            | 275            | 7.85     |
| 4     | C-2D-4  | 200×100 | 450            | 350            | 10.36    |
| 5     | C-2D-5  | 250×125 | 500            | 375            | 13.21    |
| 6     | C-2D-6  | 300×100 | 600            | 400            | 22.68    |
| 7     | C-2D-7  | 300×150 | 650            | 500            | 24.46    |
| 8     | C-2D-8  | 400×100 | 700            | 400            | 31.89    |
| 9     | C-2D-9  | 400×150 | 750            | 500            | 36.20    |
| 10    | C-2D-10 | 400×200 | 800            | 600            | 40.99    |
| 11    | C-2D-11 | 500×100 | 800            | 400            | 45.80    |
| 12    | C-2D-12 | 500×150 | 850            | 500            | 47.20    |
| 13    | C-2D-13 | 500×200 | 900            | 600            | 50.53    |
| 14    | C-2D-14 | 600×100 | 900            | 400            | 52.02    |
| 15    | C-2D-15 | 600×150 | 950            | 500            | 56.02    |
| 16    | C-2D-16 | 600×200 | 1000           | 600            | 60.14    |
| 17    | C-2D-17 | 800×100 | 1100           | 400            | 68.02    |
| 18    | C-2D-18 | 800×150 | 1150           | 500            | 79.05    |
| 19    | C-2D-19 | 800×200 | 1200           | 600            | 86.79    |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description: h=60, single-row connection holes; h=150, double-row connection holes

## XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3D上边垂直等径三通  
XQJ-C-3D Upward side vertical equal sectional Tee

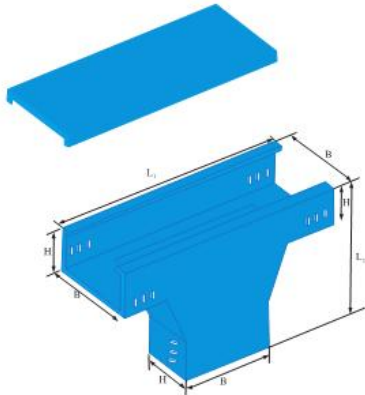

XQJ-C-3E下边垂直等径三通  
XQJ-C-3E Downward side vertical equal sectional Tee

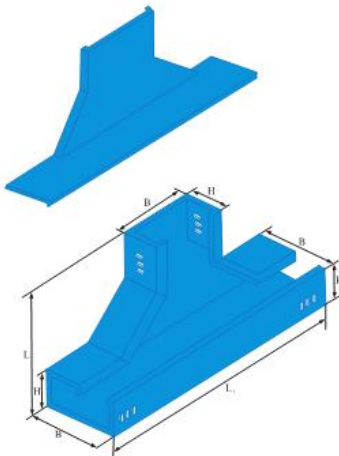

XQJ-C-3F上角垂直等径三通  
XQJ-C-3F Upward corner vertical equal sectional Tee

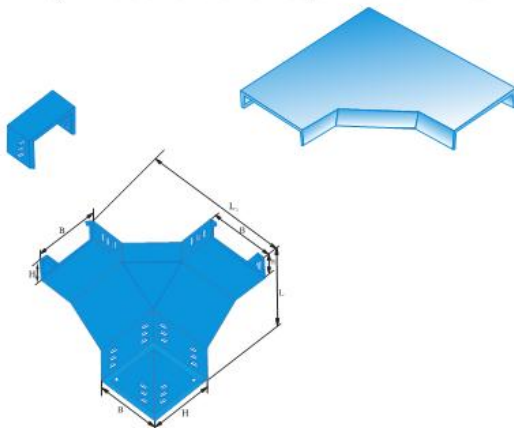

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量Weight |
|-------|---------|---------|----------------|----------------|----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |          |
| 1     | C-3D-1  | 50×25   | 250            | 125            | 2.21     |
| 2     | C-3D-2  | 100×50  | 500            | 250            | 3.94     |
| 3     | C-3D-3  | 150×75  | 550            | 275            | 11.96    |
| 4     | C-3D-4  | 200×100 | 700            | 350            | 14.92    |
| 5     | C-3D-5  | 250×125 | 750            | 375            | 18.30    |
| 6     | C-3D-6  | 300×100 | 700            | 400            | 37.20    |
| 7     | C-3D-7  | 300×150 | 1000           | 500            | 32.07    |
| 8     | C-3D-8  | 400×100 | 800            | 450            | 42.80    |
| 9     | C-3D-9  | 400×150 | 850            | 500            | 47.50    |
| 10    | C-3D-10 | 400×200 | 1200           | 600            | 54.45    |
| 11    | C-3D-11 | 500×100 | 900            | 500            | 61.30    |
| 12    | C-3D-12 | 500×150 | 950            | 550            | 63.80    |
| 13    | C-3D-13 | 500×200 | 1300           | 600            | 65.82    |
| 14    | C-3D-14 | 600×100 | 900            | 500            | 72.10    |
| 15    | C-3D-15 | 600×150 | 950            | 550            | 75.40    |
| 16    | C-3D-16 | 600×200 | 1400           | 600            | 78.12    |
| 17    | C-3D-17 | 800×100 | 900            | 500            | 87.50    |
| 18    | C-3D-18 | 800×150 | 950            | 550            | 91.02    |
| 19    | C-3D-19 | 800×200 | 1600           | 600            | 105.56   |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量Weight |
|-------|---------|---------|----------------|----------------|----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |          |
| 1     | C-3E-1  | 50×25   | 250            | 125            | 2.23     |
| 2     | C-3E-2  | 100×50  | 500            | 250            | 3.99     |
| 3     | C-3E-3  | 150×75  | 550            | 275            | 11.97    |
| 4     | C-3E-4  | 200×100 | 700            | 350            | 14.92    |
| 5     | C-3E-5  | 250×125 | 750            | 375            | 19.02    |
| 6     | C-3E-6  | 300×100 | 700            | 400            | 26.30    |
| 7     | C-3E-7  | 300×150 | 1000           | 500            | 32.07    |
| 8     | C-3E-8  | 400×100 | 800            | 450            | 38.20    |
| 9     | C-3E-9  | 400×150 | 850            | 500            | 46.50    |
| 10    | C-3E-10 | 400×200 | 1200           | 600            | 54.45    |
| 11    | C-3E-11 | 500×100 | 900            | 500            | 63.40    |
| 12    | C-3E-12 | 500×150 | 950            | 550            | 64.50    |
| 13    | C-3E-13 | 500×200 | 1300           | 600            | 65.72    |
| 14    | C-3E-14 | 600×100 | 900            | 500            | 72.80    |
| 15    | C-3E-15 | 600×150 | 950            | 550            | 75.40    |
| 16    | C-3E-16 | 600×200 | 1400           | 600            | 78.12    |
| 17    | C-3E-17 | 800×100 | 900            | 500            | 86.30    |
| 18    | C-3E-18 | 800×150 | 950            | 550            | 98.20    |
| 19    | C-3E-19 | 800×200 | 1600           | 600            | 104.56   |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量Weight |
|-------|---------|---------|----------------|----------------|----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |          |
| 1     | C-3F-1  | 50×25   | 150            | 125            | 1.90     |
| 2     | C-3F-2  | 100×50  | 300            | 250            | 4.23     |
| 3     | C-3F-3  | 150×75  | 350            | 275            | 10.98    |
| 4     | C-3F-4  | 200×100 | 450            | 350            | 14.09    |
| 5     | C-3F-5  | 250×125 | 500            | 375            | 17.39    |
| 6     | C-3F-6  | 300×100 | 600            | 400            | 27.56    |
| 7     | C-3F-7  | 300×150 | 650            | 500            | 32.59    |
| 8     | C-3F-8  | 400×100 | 700            | 400            | 40.23    |
| 9     | C-3F-9  | 400×150 | 750            | 500            | 45.18    |
| 10    | C-3F-10 | 400×200 | 800            | 600            | 54.52    |
| 11    | C-3F-11 | 500×100 | 800            | 400            | 56.59    |
| 12    | C-3F-12 | 500×150 | 850            | 500            | 62.15    |
| 13    | C-3F-13 | 500×200 | 900            | 600            | 64.68    |
| 14    | C-3F-14 | 600×100 | 900            | 400            | 69.87    |
| 15    | C-3F-15 | 600×150 | 950            | 500            | 72.36    |
| 16    | C-3F-16 | 600×200 | 1000           | 600            | 78.79    |
| 17    | C-3F-17 | 800×100 | 1100           | 400            | 86.18    |
| 18    | C-3F-18 | 800×150 | 1150           | 500            | 95.25    |
| 19    | C-3F-19 | 800×200 | 1200           | 600            | 103.82   |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes






## XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2E垂直等径右下弯通

XQJ-C-2E Vertical equal sectional right downward bend

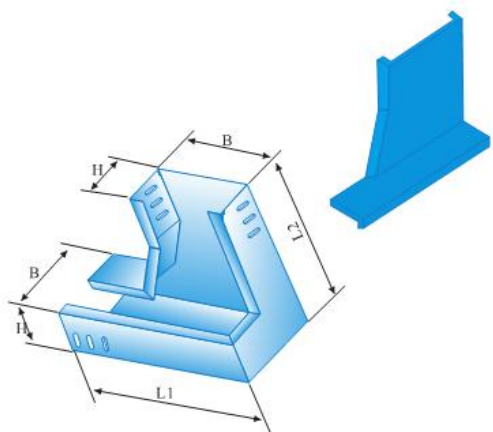


XQJ-C-2F垂直等径左上弯通

XQJ-C-2F Vertical equal sectional left upward bend

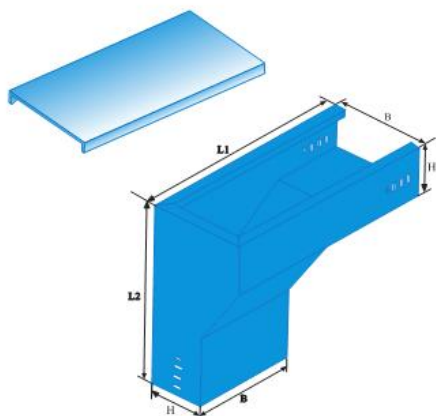

XQJ-C-2G垂直等径右上弯通

XQJ-C-2G Vertical equal sectional right upward bend

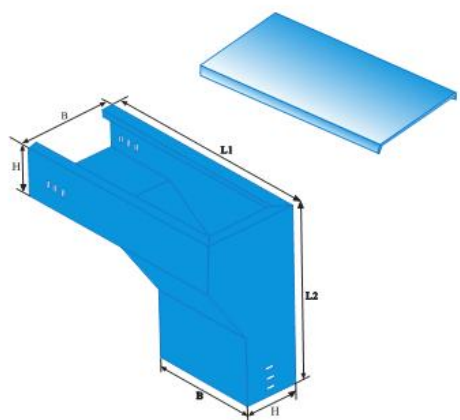

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-2E-1  | 50×25   | 150            | 125            | 1.47      |
| 2     | C-2E-2  | 100×50  | 300            | 250            | 3.98      |
| 3     | C-2E-3  | 150×75  | 350            | 275            | 7.85      |
| 4     | C-2E-4  | 200×100 | 450            | 350            | 10.43     |
| 5     | C-2E-5  | 250×125 | 500            | 370            | 14.22     |
| 6     | C-2E-6  | 300×100 | 600            | 400            | 21.68     |
| 7     | C-2E-7  | 300×150 | 650            | 500            | 24.45     |
| 8     | C-2E-8  | 400×100 | 700            | 400            | 27.89     |
| 9     | C-2E-9  | 400×150 | 750            | 500            | 35.56     |
| 10    | C-2E-10 | 400×200 | 800            | 600            | 40.89     |
| 11    | C-2E-11 | 500×100 | 800            | 400            | 41.88     |
| 12    | C-2E-12 | 500×150 | 850            | 500            | 43.12     |
| 13    | C-2E-13 | 500×200 | 900            | 600            | 49.94     |
| 14    | C-2E-14 | 600×100 | 900            | 400            | 50.24     |
| 15    | C-2E-15 | 600×150 | 950            | 500            | 52.13     |
| 16    | C-2E-16 | 600×200 | 1000           | 600            | 61.14     |
| 17    | C-2E-17 | 800×100 | 1100           | 400            | 65.45     |
| 18    | C-2E-18 | 800×150 | 1150           | 500            | 76.89     |
| 19    | C-2E-19 | 800×200 | 1200           | 600            | 84.17     |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-2F-1  | 50×25   | 150            | 100            | 1.73      |
| 2     | C-2F-2  | 100×50  | 300            | 200            | 3.88      |
| 3     | C-2F-3  | 150×75  | 350            | 250            | 7.56      |
| 4     | C-2F-4  | 200×100 | 450            | 300            | 10.30     |
| 5     | C-2F-5  | 250×125 | 500            | 350            | 13.56     |
| 6     | C-2F-6  | 300×100 | 550            | 350            | 22.68     |
| 7     | C-2F-7  | 300×150 | 650            | 500            | 24.54     |
| 8     | C-2F-8  | 400×100 | 750            | 450            | 31.50     |
| 9     | C-2F-9  | 400×150 | 750            | 500            | 36.20     |
| 10    | C-2F-10 | 400×200 | 800            | 600            | 40.23     |
| 11    | C-2F-11 | 500×100 | 900            | 600            | 52.80     |
| 12    | C-2F-12 | 500×150 | 900            | 650            | 54.20     |
| 13    | C-2F-13 | 500×200 | 900            | 700            | 58.69     |
| 14    | C-2F-14 | 600×100 | 1000           | 700            | 63.80     |
| 15    | C-2F-15 | 600×150 | 1000           | 750            | 68.20     |
| 16    | C-2F-16 | 600×200 | 1000           | 800            | 72.97     |
| 17    | C-2F-17 | 800×100 | 1200           | 900            | 83.20     |
| 18    | C-2F-18 | 800×150 | 1200           | 950            | 92.50     |
| 19    | C-2F-19 | 800×200 | 1200           | 1000           | 104.71    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes

| 序号NO. | 型号Model | 规格 Size | (mm)           |                | 重量 Weight |
|-------|---------|---------|----------------|----------------|-----------|
|       |         |         | L <sub>1</sub> | L <sub>2</sub> |           |
| 1     | C-2G-1  | 50×25   | 150            | 100            | 1.33      |
| 2     | C-2G-2  | 100×50  | 300            | 200            | 3.88      |
| 3     | C-2G-3  | 150×75  | 350            | 250            | 7.56      |
| 4     | C-2G-4  | 200×100 | 450            | 300            | 10.31     |
| 5     | C-2G-5  | 250×125 | 500            | 350            | 13.56     |
| 6     | C-2G-6  | 300×100 | 550            | 350            | 22.68     |
| 7     | C-2G-7  | 300×150 | 650            | 500            | 24.54     |
| 8     | C-2G-8  | 400×100 | 750            | 450            | 31.50     |
| 9     | C-2G-9  | 400×150 | 750            | 500            | 36.20     |
| 10    | C-2G-10 | 400×200 | 800            | 600            | 40.12     |
| 11    | C-2G-11 | 500×100 | 900            | 600            | 41.80     |
| 12    | C-2G-12 | 500×150 | 900            | 650            | 43.20     |
| 13    | C-2G-13 | 500×200 | 900            | 700            | 46.96     |
| 14    | C-2G-14 | 600×100 | 1000           | 700            | 48.80     |
| 15    | C-2G-15 | 600×150 | 1000           | 750            | 52.20     |
| 16    | C-2G-16 | 600×200 | 1000           | 800            | 56.72     |
| 17    | C-2G-17 | 800×100 | 1200           | 900            | 61.20     |
| 18    | C-2G-18 | 800×150 | 1200           | 950            | 77.50     |
| 19    | C-2G-19 | 800×200 | 1200           | 1000           | 89.44     |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes


## XQJ托盘式电缆桥架 XQJ Tray-type support

托盘式桥架是石油、化工、电力、电视电讯等方面最广泛应用的理想敷设装置。它具有重量轻、载荷大、造型美观、结构简单、安装方便、散热透气性好等优点、既适用于动力电缆的安装,也适用于控制电缆的敷设。  
Tray-type cable support systems & are ideal cable laying devices most broadly applied in petroleum industry, chemical industry, power and light industries, television and telecommunication. It is featured by such advantages as small weight, great loading capacity, good-looking shape, simple structure, convenient erection, quick heat dissipation and fine permeability.


XQJ-P-01托盘直通  
XQJ-P-01 Tray type straight support

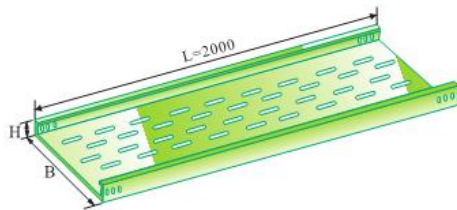

XQJ-P-02水平弯通  
XQJ-P-02 Tray type horizontal bend

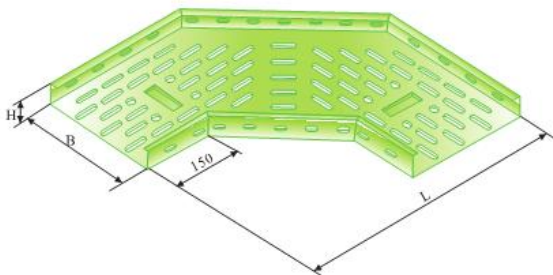

XQJ-P-03水平三通  
XQJ-P-03 Tray type horizontal Tee



| 型号Model   | b(mm) | H(mm) | 重量Weight |
|-----------|-------|-------|----------|
| P-01-6-2  | 200   | 60    | 12.61    |
| P-01-10-2 |       | 100   | 15.58    |
| P-01-15-2 |       | 150   | 19.32    |
| P-01-20-2 |       | 200   | 31.19    |
| P-01-6-3  | 300   | 60    | 22.44    |
| P-01-10-3 |       | 100   | 26.53    |
| P-01-15-3 |       | 150   | 31.60    |
| P-01-20-3 |       | 200   | 36.66    |
| P-01-6-4  | 400   | 60    | 34.19    |
| P-01-10-4 |       | 100   | 39.29    |
| P-01-15-4 |       | 150   | 45.60    |
| P-01-20-4 |       | 200   | 51.92    |
| P-01-6-5  | 500   | 60    | 40.53    |
| P-01-10-5 |       | 100   | 45.60    |
| P-01-15-5 |       | 150   | 51.92    |
| P-01-20-5 |       | 200   | 58.26    |
| P-01-6-6  | 600   | 60    | 46.85    |
| P-01-10-6 |       | 100   | 51.92    |
| P-01-15-6 |       | 150   | 58.26    |
| P-01-20-6 |       | 200   | 64.60    |
| P-01-6-8  | 800   | 60    | 71.71    |
| P-01-10-8 |       | 100   | 77.77    |
| P-01-15-8 |       | 150   | 85.35    |
| P-01-20-8 |       | 200   | 92.94    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes

| 型号Model   | b(mm) | H(mm) | L(mm) | 重量Weight |
|-----------|-------|-------|-------|----------|
| P-02-6-2  | 200   | 60    | 500   | 6.63     |
| P-02-10-2 |       | 100   |       | 8.03     |
| P-02-15-2 |       | 150   |       | 12.06    |
| P-02-20-2 |       | 200   |       | 15.12    |
| P-02-6-3  | 300   | 60    | 600   | 9.05     |
| P-02-10-3 |       | 100   |       | 10.99    |
| P-02-15-3 |       | 150   |       | 17.48    |
| P-02-20-3 |       | 200   |       | 19.98    |
| P-02-6-4  | 400   | 60    | 700   | 19.23    |
| P-02-10-4 |       | 100   |       | 21.80    |
| P-02-15-4 |       | 150   |       | 29.61    |
| P-02-20-4 |       | 200   |       | 33.85    |
| P-02-6-5  | 500   | 60    | 800   | 25.22    |
| P-02-10-5 |       | 100   |       | 28.19    |
| P-02-15-5 |       | 150   |       | 36.94    |
| P-02-20-5 |       | 200   |       | 41.56    |
| P-02-6-6  | 600   | 60    | 900   | 31.87    |
| P-02-10-6 |       | 100   |       | 35.07    |
| P-02-15-6 |       | 150   |       | 44.59    |
| P-02-20-6 |       | 200   |       | 49.54    |
| P-02-6-8  | 800   | 60    | 1100  | 41.87    |
| P-02-10-8 |       | 100   |       | 46.80    |
| P-02-15-8 |       | 150   |       | 63.22    |
| P-02-20-8 |       | 200   | 1200  | 68.97    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes

| 型号Model   | b(mm) | H(mm) | L <sub>1</sub> (mm) | L <sub>2</sub> (mm) | 重量Weight |
|-----------|-------|-------|---------------------|---------------------|----------|
| P-03-6-2  | 200   | 60    | 800                 | 500                 | 10.02    |
| P-03-10-2 |       | 100   |                     |                     | 14.10    |
| P-03-15-2 |       | 150   |                     |                     | 21.24    |
| P-03-20-2 |       | 200   | 1000                |                     | 25.49    |
| P-03-6-3  | 300   | 60    | 900                 | 600                 | 16.40    |
| P-03-10-3 |       | 100   |                     |                     | 18.36    |
| P-03-15-3 |       | 150   |                     |                     | 26.39    |
| P-03-20-3 |       | 200   | 1100                |                     | 30.79    |
| P-03-6-4  | 400   | 60    | 1000                | 700                 | 26.31    |
| P-03-10-4 |       | 100   |                     |                     | 29.21    |
| P-03-15-4 |       | 150   |                     |                     | 41.75    |
| P-03-20-4 |       | 200   | 1200                |                     | 47.71    |
| P-03-6-5  | 500   | 60    | 1100                | 800                 | 33.18    |
| P-03-10-5 |       | 100   |                     |                     | 36.32    |
| P-03-15-5 |       | 150   |                     |                     | 48.46    |
| P-03-20-5 |       | 200   | 1300                |                     | 54.52    |
| P-03-6-6  | 600   | 60    | 1200                | 900                 | 40.47    |
| P-03-10-6 |       | 100   |                     |                     | 43.71    |
| P-03-15-6 |       | 150   |                     |                     | 59.40    |
| P-03-20-6 |       | 200   | 1400                | 6000                | 66.00    |
| P-03-6-8  | 800   | 60    |                     |                     | 57.57    |
| P-03-10-8 |       | 100   |                     | 1100                | 60.85    |
| P-03-15-8 |       | 150   |                     |                     | 70.00    |
| P-03-20-8 |       | 200   | 1600                | 1200                | 76.68    |


说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description: h=60, single-row connection holes; h=150, double-row connection holes



## XQJ托盘式电缆桥架 XQJ Tray-type support


XQJ-P-04水平四通  
XQJ-P-04Tray type horizontal Cross



| 型号Model   | b(mm) | H(mm) | L(mm) | 重量Weight |
|-----------|-------|-------|-------|----------|
| P-04-6-2  | 200   | 60    | 800   | 12.86    |
| P-04-10-2 |       | 100   | 860   | 17.55    |
| P-04-15-2 |       | 150   | 1000  | 27.72    |
| P-04-20-2 |       | 200   |       | 32.66    |
| P-04-6-3  | 300   | 60    | 900   | 20.24    |
| P-04-10-3 |       | 100   | 1100  | 22.35    |
| P-04-15-3 |       | 150   |       | 32.51    |
| P-04-20-3 |       | 200   |       | 37.93    |
| P-04-6-4  | 400   | 60    | 1000  | 30.02    |
| P-04-10-4 |       | 100   | 1200  | 34.41    |
| P-04-15-4 |       | 150   |       | 50.46    |
| P-04-20-4 |       | 200   |       | 57.67    |
| P-04-6-5  | 500   | 60    | 1100  | 39.17    |
| P-04-10-5 |       | 100   | 1300  | 42.47    |
| P-04-15-5 |       | 150   |       | 59.31    |
| P-04-20-5 |       | 200   |       | 66.72    |
| P-04-6-6  | 600   | 60    | 1200  | 47.21    |
| P-04-10-6 |       | 100   | 1400  | 50.53    |
| P-04-15-6 |       | 150   |       | 69.03    |
| P-04-20-6 |       | 200   |       | 76.70    |
| P-04-6-8  | 800   | 60    | 1600  | 65.95    |
| P-04-10-8 |       | 100   |       | 68.58    |
| P-04-15-8 |       | 150   |       | 89.91    |
| P-04-20-8 |       | 200   |       | 98.08    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes


XQJ-P-05A、B垂直凹、凸弯通  
XQJ-P-05A、BTray type straight convex(concave)bend

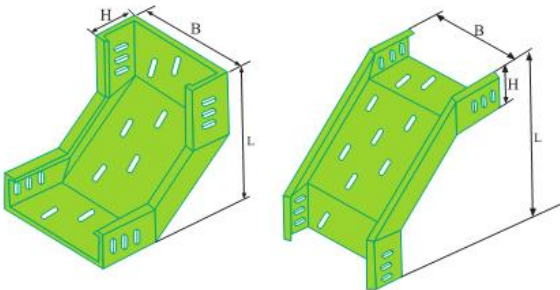

| 型号Model      | b(mm) | H(mm) | L(mm) | 重量Weight |
|--------------|-------|-------|-------|----------|
| P-05A、B-6-2  | 200   | 60    | 360   | 5.19     |
| P-05A、B-10-2 |       | 100   | 400   | 7.39     |
| P-05A、B-15-2 |       | 150   | 550   | 13.32    |
| P-05A、B-20-2 |       | 200   | 550   | 16.22    |
| P-05A、B-6-3  | 300   | 60    | 360   | 7.25     |
| P-05A、B-10-3 |       | 100   | 400   | 9.10     |
| P-05A、B-15-3 |       | 150   | 550   | 15.10    |
| P-05A、B-20-3 |       | 200   | 550   | 17.90    |
| P-05A、B-6-4  | 400   | 60    | 360   | 11.80    |
| P-05A、B-10-4 |       | 100   | 400   | 14.23    |
| P-05A、B-15-4 |       | 150   | 550   | 21.95    |
| P-05A、B-20-4 |       | 200   | 550   | 24.28    |
| P-05A、B-6-5  | 500   | 60    | 360   | 13.87    |
| P-05A、B-10-5 |       | 100   | 400   | 16.35    |
| P-05A、B-15-5 |       | 150   | 550   | 25.00    |
| P-05A、B-20-5 |       | 200   | 550   | 28.64    |
| P-05A、B-6-6  | 600   | 60    | 360   | 26.08    |
| P-05A、B-10-6 |       | 100   | 400   | 28.63    |
| P-05A、B-15-6 |       | 150   | 550   | 39.49    |
| P-05A、B-20-6 |       | 200   | 550   | 43.69    |
| P-05A、B-6-8  | 800   | 60    | 360   | 33.53    |
| P-05A、B-10-8 |       | 100   | 400   | 36.37    |
| P-05A、B-15-8 |       | 150   | 550   | 49.49    |
| P-05A、B-20-8 |       | 200   | 550   | 54.20    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-P-05C 垂直转动弯通  
XQJ-P-05C Tray type straight rotatable bend

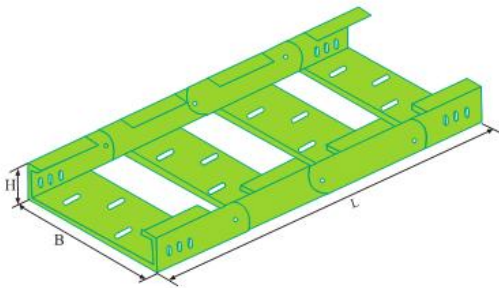

| 型号Model     | b(mm) | H(mm) | L(mm) | 重量Weight |
|-------------|-------|-------|-------|----------|
| P-05C-6-2   | 200   | 60    | 660   | 7.07     |
| P-05C-10-2  |       | 100   | 700   | 9.89     |
| P-05C-15-2  |       | 150   | 950   | 16.83    |
| P-05C-20-2  |       | 200   | 1150  | 20.20    |
| P-05C-6-3   | 300   | 60    | 660   | 8.25     |
| P-05C-10-3  |       | 100   | 700   | 11.51    |
| P-05C-15-3  |       | 150   | 950   | 19.25    |
| P-05C-20-3  |       | 200   | 1150  | 22.46    |
| P-05C-6-4   | 400   | 60    | 660   | 17.52    |
| P-05C-10-4  |       | 100   | 700   | 19.71    |
| P-05CB-15-4 |       | 150   | 950   | 32.22    |
| P-05C-20-4  |       | 200   | 1150  | 36.82    |
| P-05C-6-5   | 500   | 60    | 660   | 19.62    |
| P-05C-10-5  |       | 100   | 700   | 22.19    |
| P-05C-15-5  |       | 150   | 950   | 35.58    |
| P-05C-20-5  |       | 200   | 1150  | 40.03    |
| P-05C-6-6   | 600   | 60    | 660   | 22.19    |
| P-05C-10-6  |       | 100   | 700   | 24.96    |
| P-05C-15-6  |       | 150   | 950   | 37.85    |
| P-05C-20-6  |       | 200   | 1150  | 42.06    |
| P-05C-6-8   | 800   | 60    | 660   | 26.84    |
| P-05CB-10-8 |       | 100   | 700   | 29.61    |
| P-05C-15-8  |       | 150   | 950   | 45.95    |
| P-05C-20-8  |       | 200   | 1150  | 49.80    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

## XQJ梯级式电缆桥架


### XQJ Ladder-type support

梯级式桥架是根据国外有关技术及我厂产品的特点改进而成,它具有重量轻、成本低、造型别致、通风散热性能好等特点。它适用于一般直径较大的电缆敷设,特别适用于高、低压动力电缆的敷设。

Ladder-type cable support systems are products manufactured at this factory by referring to relevant technical data of other countries and maintaining the characteristics of the original products of this factory, it features small weight, low cost, unique shaping, fine permeability and quick heat dissipation. It is applicable for laying of big-diameter cables, especially high-voltage, low-voltage and power cables,

XQJ-T-01梯级直通

XQJ-T-01 Ladder-type straight Cable support

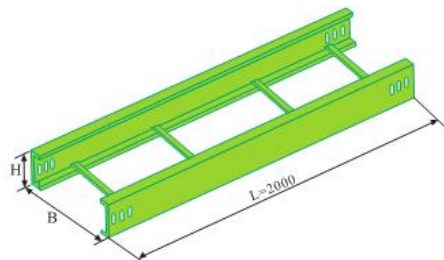


| 序号<br>NO. | 型号Model   | b(mm) | H(mm) | 重量 Weight |
|-----------|-----------|-------|-------|-----------|
| 1         | T-01-6-2  | 200   | 60    | 10.66     |
| 2         | T-01-10-2 |       | 100   | 17.76     |
| 3         | T-01-15-2 |       | 150   | 23.95     |
| 4         | T-01-6-3  | 300   | 60    | 13.35     |
| 5         | T-01-10-3 |       | 100   | 20.06     |
| 6         | T-01-15-3 |       | 150   | 25.23     |
| 7         | T-01-6-4  | 400   | 60    | 19.10     |
| 8         | T-01-10-4 |       | 100   | 25.56     |
| 9         | T-01-15-4 |       | 150   | 31.95     |
| 10        | T-01-20-4 | 500   | 200   | 35.34     |
| 11        | T-01-6-5  |       | 60    | 20.65     |
| 12        | T-01-10-5 |       | 100   | 27.21     |
| 13        | T-01-15-5 | 600   | 150   | 33.31     |
| 14        | T-01-20-5 |       | 200   | 41.55     |
| 15        | T-01-6-6  | 800   | 60    | 22.24     |
| 16        | T-01-10-6 |       | 100   | 28.21     |
| 17        | T-01-15-6 |       | 150   | 35.15     |
| 18        | T-01-20-6 | 800   | 200   | 43.16     |
| 19        | T-01-6-8  |       | 60    | 31.11     |
| 20        | T-01-10-8 |       | 100   | 38.69     |
| 21        | T-01-15-8 |       | 150   | 46.05     |
| 22        | T-01-20-8 |       | 200   | 53.56     |

说明:高度h=60,100为单排连接孔,高h=150为双排连接孔  
Description:h=60,single-row connection holes,h=150,double-row connection holes

XQJ-T-02水平弯通

XQJ-T-02 Ladder-type horizontal bend

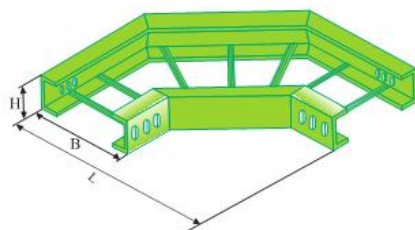


| 序号<br>NO. | 型号Model   | b(mm) | H(mm) | L <sub>1</sub> (mm)        | 重量kg Weight |
|-----------|-----------|-------|-------|----------------------------|-------------|
| 1         | T-02-6-2  | 200   | 60    | 500<br>L <sub>1</sub> (mm) | 4.98        |
| 2         | T-02-10-2 |       | 100   |                            | 6.10        |
| 3         | T-02-15-2 |       | 150   |                            | 10.56       |
| 4         | T-02-6-3  | 300   | 60    | 600                        | 6.15        |
| 5         | T-02-10-3 |       | 100   |                            | 7.46        |
| 6         | T-02-15-3 |       | 150   |                            | 12.65       |
| 7         | T-02-6-4  | 400   | 60    | 700                        | 10.66       |
| 8         | T-02-10-4 |       | 100   |                            | 12.35       |
| 9         | T-02-15-4 |       | 150   |                            | 15.91       |
| 10        | T-02-20-4 | 500   | 200   | 800                        | 21.30       |
| 11        | T-02-6-5  |       | 60    |                            | 12.68       |
| 12        | T-02-10-5 |       | 100   |                            | 13.46       |
| 13        | T-02-15-5 | 600   | 150   | 900                        | 18.31       |
| 14        | T-02-20-5 |       | 200   |                            | 24.87       |
| 15        | T-02-6-6  | 800   | 60    | 1000                       | 14.68       |
| 16        | T-02-10-6 |       | 100   |                            | 16.77       |
| 17        | T-02-15-6 |       | 150   |                            | 20.70       |
| 18        | T-02-20-6 | 800   | 200   | 1100                       | 27.53       |
| 19        | T-02-6-8  |       | 60    |                            | 18.96       |
| 20        | T-02-10-8 |       | 100   |                            | 21.13       |
| 21        | T-02-15-8 |       | 150   | 1200                       | 26.34       |
| 22        | T-02-20-8 |       | 200   |                            | 34.87       |

说明:高度h=60,100为单排连接孔,高h=150为双排连接孔  
Description:h=60,single-row connection holes,h=150,double-row connection holes

XQJ-T-03水平三通

XQJ-T-03 Ladder-type horizontal Tee

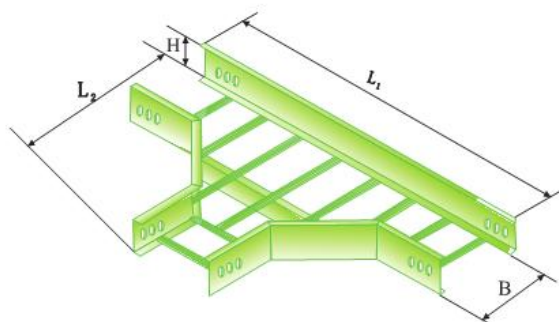

| 序号<br>NO. | 型号Model   | b(mm) | H(mm) | L <sub>1</sub> (mm) | L <sub>2</sub> (mm) | 重量Weight |
|-----------|-----------|-------|-------|---------------------|---------------------|----------|
| 1         | T-03-6-2  | 200   | 60    | 800                 | 500                 | 7.26     |
| 2         | T-03-10-2 |       | 100   |                     |                     | 9.02     |
| 3         | T-03-15-2 |       | 150   |                     |                     | 16.28    |
| 4         | T-03-6-3  | 300   | 60    | 900                 | 600                 | 9.24     |
| 5         | T-03-10-3 |       | 100   |                     |                     | 10.45    |
| 6         | T-03-15-3 |       | 150   |                     |                     | 17.92    |
| 7         | T-03-6-4  | 400   | 60    | 1100                | 700                 | 14.85    |
| 8         | T-03-10-4 |       | 100   |                     |                     | 16.02    |
| 9         | T-03-15-4 |       | 150   |                     |                     | 21.73    |
| 10        | T-03-20-4 | 500   | 200   | 1200                | 800                 | 29.05    |
| 11        | T-03-6-5  |       | 60    |                     |                     | 17.09    |
| 12        | T-03-10-5 |       | 100   |                     |                     | 19.08    |
| 13        | T-03-15-5 | 600   | 150   | 1300                | 900                 | 24.48    |
| 14        | T-03-20-5 |       | 200   |                     |                     | 32.76    |
| 15        | T-03-6-6  | 800   | 60    | 1200                | 1000                | 19.23    |
| 16        | T-03-10-6 |       | 100   |                     |                     | 21.86    |
| 17        | T-03-15-6 |       | 150   |                     |                     | 27.23    |
| 18        | T-03-20-6 | 800   | 200   | 1400                | 1100                | 36.60    |
| 19        | T-03-6-8  |       | 60    |                     |                     | 22.44    |
| 20        | T-03-10-8 |       | 100   |                     |                     | 25.77    |
| 21        | T-03-15-8 |       | 150   | 1600                | 1200                | 32.71    |
| 22        | T-03-20-8 |       | 200   |                     |                     | 42.08    |

说明:高度h=60,100为单排连接孔,高h=150为双排连接孔  
Description:h=60,single-row connection holes,h=150,double-row connection holes






## XQJ梯级式电缆桥架 XQJ Ladder-type support

XQJ-T-04水平四通

XQJ-T-04Ladder-type horizontal Cross

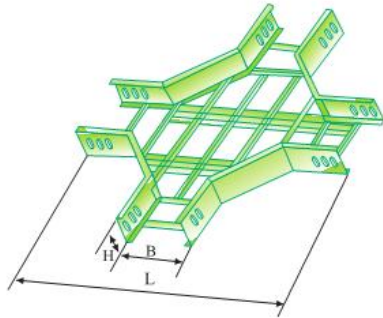



| 序号<br>NO. | 型号Model   | b(mm) | H(mm) | L(mm) | 重量 Weight |
|-----------|-----------|-------|-------|-------|-----------|
| 1         | T-01-6-2  | 200   | 60    | 800   | 9.52      |
| 2         | T-01-10-2 |       | 100   | 800   | 11.43     |
| 3         | T-01-15-2 |       | 150   | 1000  | 20.20     |
| 4         | T-01-6-3  | 300   | 60    | 900   | 15.52     |
| 5         | T-01-10-3 |       | 100   | 900   | 16.05     |
| 6         | T-01-15-3 |       | 150   | 1100  | 21.80     |
| 7         | T-01-6-4  | 400   | 60    | 1000  | 21.73     |
| 8         | T-01-10-4 |       | 100   | 1000  | 23.96     |
| 9         | T-01-15-4 |       | 150   | 1200  | 27.42     |
| 10        | T-01-20-4 | 500   | 200   | 1200  | 37.04     |
| 11        | T-01-6-5  |       | 60    | 1100  | 24.55     |
| 12        | T-01-10-5 |       | 100   | 1100  | 26.83     |
| 13        | T-01-15-5 | 600   | 150   | 1300  | 30.96     |
| 14        | T-01-20-5 |       | 200   | 1300  | 38.65     |
| 15        | T-01-6-6  |       | 60    | 1200  | 28.09     |
| 16        | T-01-10-6 | 800   | 100   | 1400  | 30.36     |
| 17        | T-01-15-6 |       | 150   | 1400  | 34.50     |
| 18        | T-01-20-6 |       | 200   | 1400  | 42.50     |
| 19        | T-01-6-8  | 800   | 60    | 1600  | 35.16     |
| 20        | T-01-10-8 |       | 100   | 1600  | 37.43     |
| 21        | T-01-15-8 |       | 150   | 1600  | 41.53     |
| 22        | T-01-20-8 | 800   | 200   | 1600  | 49.86     |

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-T-05A垂直凹弯通  
XQJ-T-05ALadder-type  
straight convex bend

XQJ-T-05B垂直凸弯通  
XQJ-T-05BLadder-type  
straight concave bend

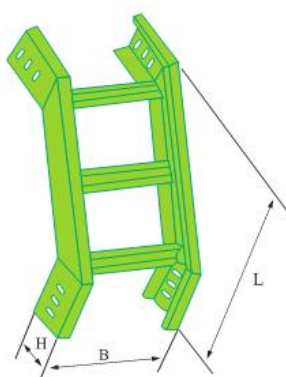


| 序号<br>NO. | 型号Model      | b(mm) | H(mm) | L(mm) | 重量 Weight |
|-----------|--------------|-------|-------|-------|-----------|
| 1         | T-05A、B-6-2  | 200   | 60    | 360   | 3.60      |
| 2         | T-05A、B-10-2 |       | 100   | 400   | 4.71      |
| 3         | T-05A、B-15-2 |       | 150   | 550   | 9.24      |
| 4         | T-05A、B-6-3  | 300   | 60    | 360   | 4.38      |
| 5         | T-05A、B-10-3 |       | 100   | 400   | 5.29      |
| 6         | T-05A、B-15-3 |       | 150   | 550   | 10.30     |
| 7         | T-05A、B-6-4  | 400   | 60    | 360   | 6.81      |
| 8         | T-05A、B-10-4 |       | 100   | 400   | 8.15      |
| 9         | T-05A、B-15-4 |       | 150   | 550   | 12.39     |
| 10        | T-05A、B-20-4 | 500   | 200   | 700   | 23.67     |
| 11        | T-05A、B-6-5  |       | 60    | 360   | 8.20      |
| 12        | T-05A、B-10-5 |       | 100   | 400   | 9.98      |
| 13        | T-05A、B-15-5 | 600   | 150   | 550   | 13.25     |
| 14        | T-05A、B-20-5 |       | 200   | 700   | 24.21     |
| 15        | T-05A、B-6-6  |       | 60    | 360   | 8.68      |
| 16        | T-05A、B-10-6 | 800   | 100   | 400   | 10.02     |
| 17        | T-05A、B-15-6 |       | 150   | 550   | 14.26     |
| 18        | T-05A、B-20-6 |       | 200   | 700   | 25.73     |
| 19        | T-05A、B-6-8  | 800   | 60    | 360   | 10.54     |
| 20        | T-05A、B-10-8 |       | 100   | 400   | 12.87     |
| 21        | T-05A、B-15-8 |       | 150   | 550   | 16.11     |
| 22        | T-05A、B-20-8 | 800   | 200   | 700   | 27.88     |

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔

Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-T1-05C型垂直转动弯通

XQJ-T1-05CVertical rotatable bend

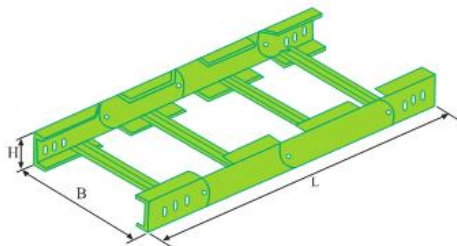

| 序号<br>NO. | 型号Model     | b(mm) | H(mm) | L(mm) | 重量 Weight |
|-----------|-------------|-------|-------|-------|-----------|
| 1         | T1-05C-6-2  | 200   | 60    | 780   | 5.12      |
| 2         | T1-05C-10-2 |       | 100   | 900   | 7.21      |
| 3         | T1-05C-15-2 |       | 150   | 1050  | 15.20     |
| 4         | T1-05C-6-3  | 300   | 60    | 780   | 7.21      |
| 5         | T1-05C-10-3 |       | 100   | 900   | 9.37      |
| 6         | T1-05C-15-3 |       | 150   | 1050  | 15.73     |
| 7         | T1-05C-6-4  | 400   | 60    | 780   | 9.76      |
| 8         | T1-05C-10-4 |       | 100   | 900   | 12.49     |
| 9         | T1-05C-15-4 |       | 150   | 1050  | 19.12     |
| 10        | T1-05C-20-4 | 500   | 200   | 1200  | 30.72     |
| 11        | T1-05C-6-5  |       | 60    | 780   | 10.75     |
| 12        | T1-05C-10-5 |       | 100   | 900   | 13.35     |
| 13        | T1-05C-15-5 | 600   | 150   | 1050  | 17.83     |
| 14        | T1-05C-20-5 |       | 200   | 1200  | 28.32     |
| 15        | T1-05C-6-6  |       | 60    | 780   | 13.61     |
| 16        | T1-05C-10-6 | 800   | 100   | 900   | 16.85     |
| 17        | T1-05C-15-6 |       | 150   | 1050  | 18.69     |
| 18        | T1-05C-20-6 |       | 200   | 1200  | 29.76     |
| 19        | T1-05C-6-8  | 800   | 60    | 780   | 14.52     |
| 20        | T1-05C-10-8 |       | 100   | 900   | 17.46     |
| 21        | T1-05C-15-8 |       | 150   | 1050  | 24.09     |
| 22        | T1-05C-20-8 | 800   | 200   | 1200  | 35.46     |

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔


Description:h=60,single-row connection holes;h=150,double-row connection holes

## 组合式、配线桥架 XQJ Combined-type support


组合式电缆桥架是一种最新型桥架。它适用于各种工程、各个单位、各种电缆的敷设。它具有结构简单、配置灵活、任意转向、变宽、分支、引上、引下安装方便，是电缆桥架等系列最理想的产品。

The combined cable support system is the newest type. It is applicable for all kinds of projects. It is simple in structure but flexible in combination. It can be widened and led upward or downward according to the design. Therefore, it is maybe the ideal product of all.



组合式电缆桥架  
水平弯通三通组装示意图  
Sketch Map of Installing Horizontal  
Elbow joint & T-joint of Combination  
type Cable Tray

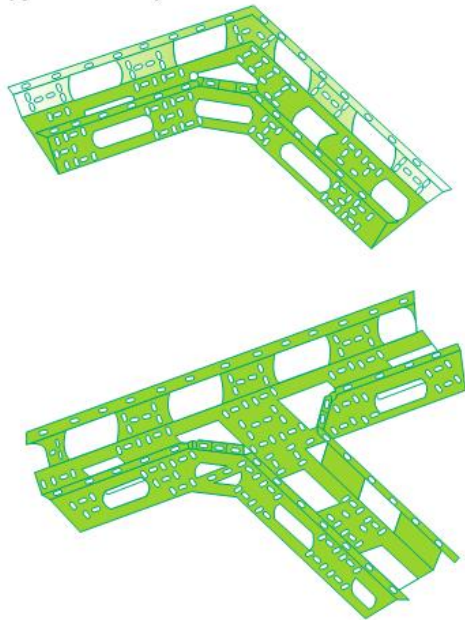

组合式电缆桥架  
水平四通、垂直三通组装示意图  
Sketch Map of Installing Horizontal  
Cross & Vertical T-joint Combination  
type Cable Tray

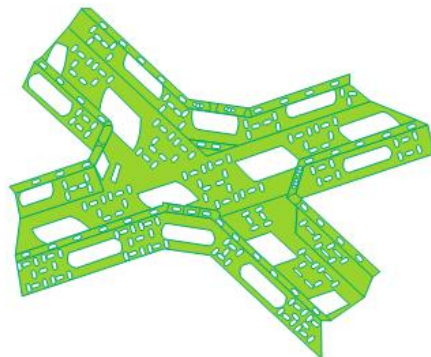


组合式电缆桥架  
垂直弯通及几种锯切示意图  
Sketch Map of Vertical Elbow Joint of  
Combination Type Cable Tray & ways of  
Sawing vertical Elbow Joint

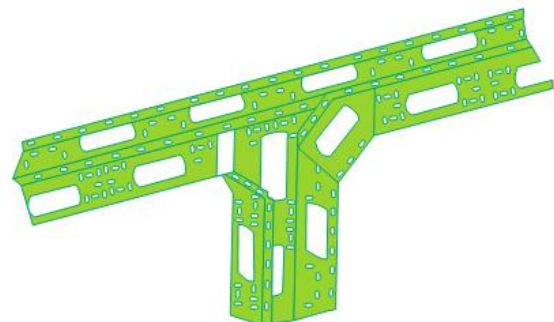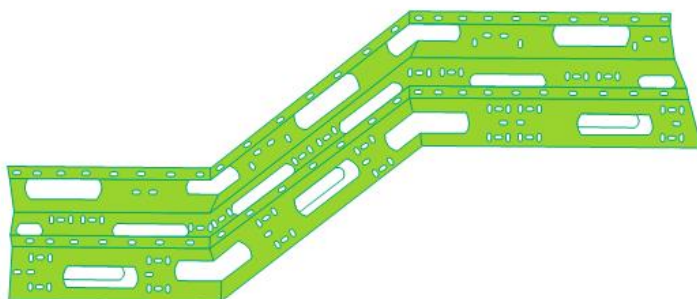



## XQJ组合式、配线桥架及连接附件 XQJ Series Cable Support Accessories

XQJ-ZH-01A 型组合式桥架  
Model XQJ-ZH-01A combined Cable Support

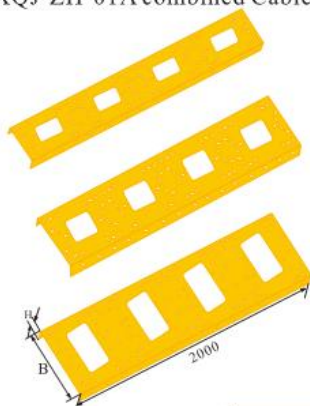


| 型号<br>Model | 规格b×h<br>Size | 重量kg<br>Weight |
|-------------|---------------|----------------|
| ZH-01A-100  | 100×25        | 5.60           |
| ZH-01A-150  | 150×25        | 7.45           |
| ZH-01A-200  | 200×25        | 9.27           |

XQJ-ZH-01B 型组合式桥架  
Model XQJ-ZH-01B combined Cable Support



| 型号<br>Model | 规格b×h<br>Size | 重量kg<br>Weight |
|-------------|---------------|----------------|
| ZH-01B-100  | 100×25        | 5.60           |
| ZH-01B-150  | 150×25        | 7.45           |
| ZH-01B-200  | 200×25        | 9.27           |

XQJ-ZH-02A、B型配线桥架  
XQJ-ZH-02A、B Model Cabling Support

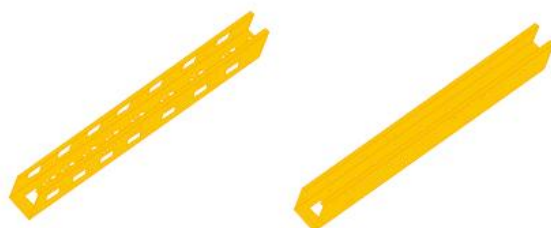


A型 A Type

B型 B Type

| 型号<br>Model | 规格<br>Size | 支撑距离“×”时电缆负载能力<br>Load Capacity for diffednt spans |    |      |    |      |    | 重量kg<br>Weight |
|-------------|------------|----------------------------------------------------|----|------|----|------|----|----------------|
|             |            | 1.5m                                               | 2m | 2.5m | 3m | 3.5m | 4m |                |
| ZH-02A      | 50×50      | 50                                                 | 30 | 19   | 9  | 5    | 3  | 6.71           |
| ZH-02B      | 50×50      | 60                                                 | 33 | 18   | 10 | 6    | 4  | 6.71           |

XQJ-ZH-03A、B型配线桥架  
XQJ-ZH-03A、B Model Cabling Support

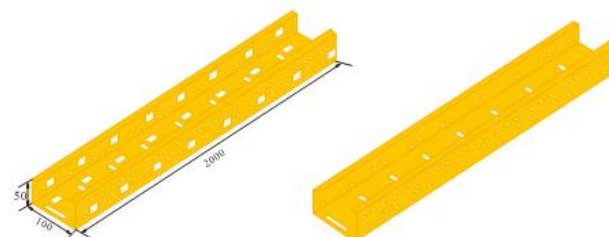


A型 A Type

B型 B Type


| 型号<br>Model | 规格<br>Size | 支撑距离“×”时电缆负载能力<br>Load Capacity for diffednt spans |    |      |    |      |    | 重量kg<br>Weight |
|-------------|------------|----------------------------------------------------|----|------|----|------|----|----------------|
|             |            | 1.5m                                               | 2m | 2.5m | 3m | 3.5m | 4m |                |
| ZH-03A      | 100×50     | 67                                                 | 38 | 20   | 12 | 7    | 5  | 8.58           |
| ZH-03B      | 100×50     | 83                                                 | 88 | 28   | 16 | 10   | 7  | 8.58           |

XQJ-ZH-04型配线桥架  
Model XQJ-ZH-04 Cabling Support

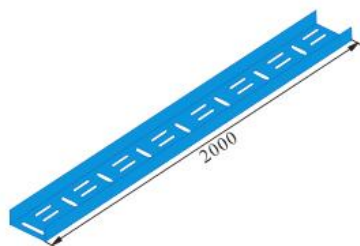


| 型号<br>Model | 规格<br>Size | 重量Kg<br>Weight | 备注<br>Remarks |
|-------------|------------|----------------|---------------|
| ZH-04       | 50×25      | 3.73           |               |

XQJ-ZH-05型连接板  
Model XQJ-ZH-05 Connection Plate



| 型号<br>Model | 规格<br>Size | Kg/只Weigh<br>tpiece | 备注<br>Remarks |
|-------------|------------|---------------------|---------------|
| ZH-05       | 25×25      | 0.10kg              |               |

XQJ-ZH-06型连接片  
Model XQJ-ZH-06 Connection Piece



| 型号<br>Model | 规格<br>Size | Kg/只Weigh<br>tpiece | 备注<br>Remarks |
|-------------|------------|---------------------|---------------|
| ZH-06       | 24×70      | 0.04kg              |               |


## XQJ组合式、配线桥架及连接附件 XQJ Series Cable Support Accessories

XQJ-ZH型组合式电缆桥架组合形式及配套件数表

Possible configurations and required no. Of elements for Model XQJ-ZH combined cable support

| 序号<br>NO.            | 形式<br>Type | 底板与侧边的配制图<br>Bottom and side plates |  | 底板宽 (mm)<br>底板宽 (mm) | 底板h (数量)<br>NO. of side plates |     |        | 侧边数量<br>NO. of side plates | 侧边数量连接螺栓<br>Connection bolts |                    | 备注<br>REE |
|----------------------|------------|-------------------------------------|--|----------------------|--------------------------------|-----|--------|----------------------------|------------------------------|--------------------|-----------|
|                      |            |                                     |  |                      | 100                            | 150 | 200    |                            | 规格<br>Size                   | 数量/m<br>Quantity/m |           |
| 1001<br>1002<br>1003 | A          |                                     |  | 103<br>153<br>203    | 1                              | 1   | 1      | 2<br>2<br>2                | M6×12                        | 6(14)              |           |
| 1004<br>1005         |            |                                     |  | 303<br>403           |                                | 2   | 2      | 2<br>2                     |                              | 9(19)              |           |
| 1006<br>1007         |            |                                     |  | 503<br>603           |                                | 2   | 1<br>3 | 2<br>2                     |                              | 12(24)             |           |
| 2008<br>2009<br>2010 | B          |                                     |  | 205<br>305<br>405    |                                | 2   | 2      | 3<br>3<br>3                | M6×12                        | 9(21)              |           |
| 2011<br>2022         |            |                                     |  | 505<br>605           | 2                              | 2   | 1<br>3 | 3<br>3                     |                              | 12(26)             |           |
| 2013                 |            |                                     |  | 805                  |                                |     | 4      | 3                          |                              | 16(31)             |           |
| 3014<br>3015<br>3016 | C          |                                     |  | 306<br>456<br>606    | 3                              | 3   | 3      | 4<br>4<br>4                | M6×12                        | 12(28)             |           |
| 3017                 |            |                                     |  | 806                  |                                |     | 4      | 4                          |                              | 15(33)             |           |
| 3018                 |            |                                     |  | 1006                 |                                |     | 5      | 4                          |                              | 18(38)             |           |
| 3019                 |            |                                     |  | 1206                 |                                |     | 6      | 4                          |                              | 21(41)             |           |
| 4020<br>4021<br>4022 | D          |                                     |  | 153<br>203<br>253    | 1                              | 1   | 1      | 4<br>4<br>4                | M6×15                        | 16(24)             |           |
| 4023<br>4024         |            |                                     |  | 353<br>453           |                                | 2   | 2      | 4<br>4                     |                              | 20(30)             |           |
| 5025<br>5026<br>5027 | E          |                                     |  | 256<br>356<br>456    | 2                              | 2   | 2      | 6<br>6<br>6                | M6×15                        | 24(36)             |           |
| 5028<br>5029         |            |                                     |  | 656<br>856           |                                | 4   | 4      | 6<br>6                     |                              | 32(48)             |           |

XQJ-ZH07型连接板  
Model XQJ-ZH-07 Connection plate



| 型号<br>Model | Kg/只<br>Weight/piece | 备注<br>Remarks |
|-------------|----------------------|---------------|
| ZH-07       | 0.11kg               |               |

XQJ-ZH-11型扣锁  
Model XQJ-ZH-11 lock




| 型号<br>Model | Kg/只<br>Weight/piece | 备注<br>Remarks |
|-------------|----------------------|---------------|
| ZH-07       | 0.11kg               |               |

XQJ-ZH-08型管接头  
Model XQJ-ZH-08 pipe connector




| 配管<br>Connected Pipe          | 安装尺寸L×H<br>Size of installation |
|-------------------------------|---------------------------------|
| G1/2" G3/4" G1"<br>G1 1/2" G2 | 122×74, 122×124<br>122×174      |

XQJ-ZH-09型管卡  
Model XQJ-ZH-09 Upipe clamp



| 规格 Φ×L<br>Size                                      | 配用引线管径<br>Cable diameter                      |
|-----------------------------------------------------|-----------------------------------------------|
| 22×31, 27×34, 34×37<br>49×45, 61×50, 76×57<br>89×64 | G1/2" G3/4" G1"<br>G1 1/2" G2" G2 1/2"<br>G3" |

XQJ-ZH-10型盖板  
Model XQJ-ZH-10 cover plates

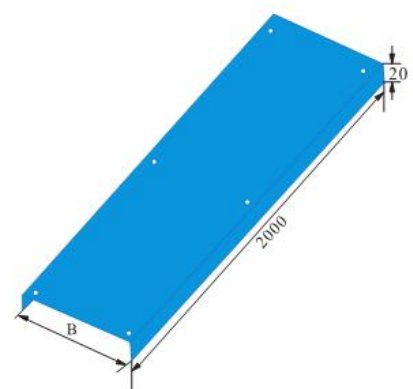

| 型号Model   | b(mm) | 重量 (kg)<br>Weight | 备注Remarks                                                                                                                                                                                                                                                        |
|-----------|-------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ZH-10-50  | 55    | 3.35              | 订货时请注明配套使用的组合式电缆桥架的组合形式:<br>A、B、C、D、E、b宽度根据组合形式:<br>A型加3mm、B、C型加6mm、D型加56mm、E型加59mm<br>Please give clear indication of the combination forms:<br>A、B、C、D、E、b Width<br>Plus 3mm for Type A<br>Plus 6mm for Type B<br>Plus 56mm for Type D<br>Plus 59mm for Type E |
| ZH-10-100 | 105   | 5.23              |                                                                                                                                                                                                                                                                  |
| ZH-10-150 | 155   | 7.08              |                                                                                                                                                                                                                                                                  |
| ZH-10-200 | 205   | 8.95              |                                                                                                                                                                                                                                                                  |
| ZH-10-300 | 305   | 17.23             |                                                                                                                                                                                                                                                                  |
| ZH-10-400 | 405   | 22.29             |                                                                                                                                                                                                                                                                  |
| ZH-10-500 | 505   | 27.29             |                                                                                                                                                                                                                                                                  |
| ZH-10-600 | 605   | 40.53             |                                                                                                                                                                                                                                                                  |
| ZH-10-700 | 705   | 46.85             |                                                                                                                                                                                                                                                                  |
| ZH-10-800 | 805   | 53.19             |                                                                                                                                                                                                                                                                  |






## XQJ防火电缆桥架 XQJ Fire Resisting Support

防火桥架是我厂在公安部上海消防科学研究所协助下，及众多设计单位支持下。研制成功我国第一代耐火钢制桥架，其耐火性能、电气性能、金属结构性能已超过美国，日本等国家的有关指标。

The fire-proof cable support system is the first-generation cable support system mabe of firer-resistant steel which was developed by this factory with the help if the Shanghai Fire-Fighting Science Research Instiute under the Ministry of Public Security and support of a lot design units, Its technical parameters have exceeded those set out in relevant standards of U.S.A.and Japan in fire-resistance, electric properties and metal-structure properties.


### XQJ-QINT-01A 防火桥架直通

#### XQJ-QINT-01A Fire prevention support straight piece

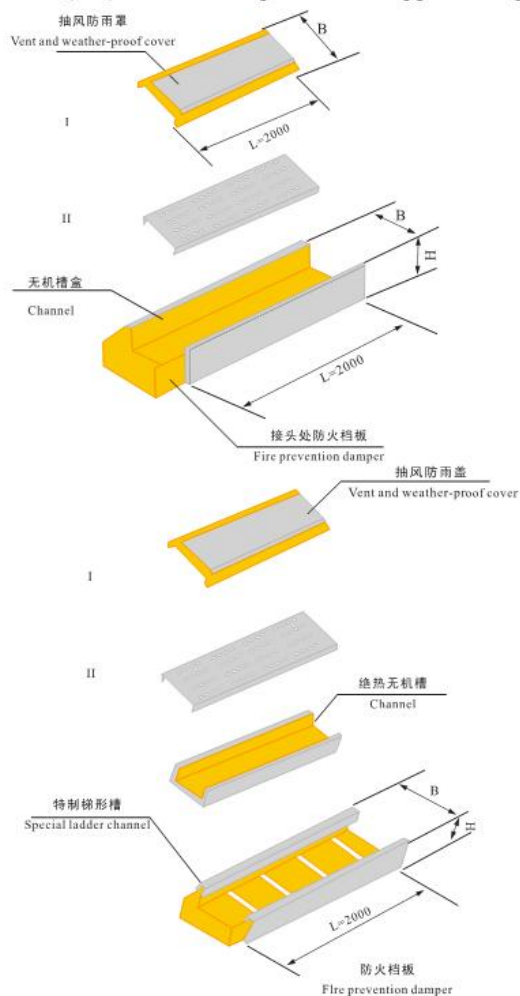

### XQJ-QINT-NTW-01B 防火网式托架

#### XQJ-QINT-01B Rack with fire retarding net

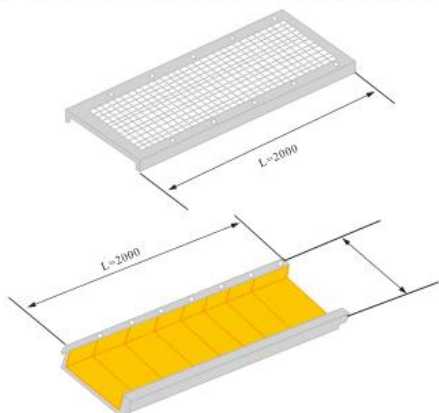


| 序号<br>NO | 型号Model      | 外型尺寸Outerdimenslons |         | 内截面Innersection |     |
|----------|--------------|---------------------|---------|-----------------|-----|
|          |              | 宽Width              | 边高Heigh | 宽×高             | W×H |
| 1        | QJNT-01A-15a | 150                 | 100     | 100             | 60  |
| 2        | QJNT-01A-20a | 200                 | 100     | 150             | 60  |
| 3        | QJNT-01A-30a | 300                 | 100     | 250             | 60  |
| 4        | QJNT-01A-40a | 400                 | 100     | 350             | 60  |
| 5        | QJNT-01A-20b | 200                 | 150     | 150             | 110 |
| 6        | QJNT-01A-30b | 300                 | 150     | 250             | 110 |
| 7        | QJNT-01A-40b | 400                 | 150     | 350             | 110 |
| 8        | QJNT-01A-50b | 500                 | 150     | 450             | 110 |
| 9        | QJNT-01A-30c | 300                 | 200     | 250             | 160 |
| 10       | QJNT-01A-40c | 400                 | 200     | 350             | 160 |
| 11       | QJNT-01A-50c | 500                 | 200     | 450             | 160 |
| 12       | QJNT-01A-60c | 600                 | 200     | 550             | 160 |
| 13       | QJNT-01A-40d | 400                 | 250     | 350             | 210 |
| 14       | QJNT-01A-50d | 500                 | 250     | 450             | 210 |
| 15       | QJNT-01A-60d | 600                 | 250     | 550             | 210 |
| 16       | QJNT-01A-80d | 800                 | 250     | 750             | 210 |
| 17       | QJNT-01A-50e | 500                 | 300     | 450             | 260 |
| 18       | QJNT-01A-60e | 600                 | 300     | 550             | 260 |

| 序号<br>NO | 型号Model      | 外型尺寸Outerdimenslons |         | 内截面Innersection |     |
|----------|--------------|---------------------|---------|-----------------|-----|
|          |              | 宽Width              | 边高Heigh | 宽×高             | W×H |
| 1        | QJNT-01B-15a | 150                 | 100     | 100             | 60  |
| 2        | QJNT-01B-20a | 200                 | 100     | 150             | 60  |
| 3        | QJNT-01B-30a | 300                 | 100     | 250             | 60  |
| 4        | QJNT-01B-40a |                     | 100     | 350             | 60  |
| 5        | QJNT-01B-20b | 200                 | 150     | 150             | 110 |
| 6        | QJNT-01B-30b | 300                 | 150     | 250             | 110 |
| 7        | QJNT-01B-40b | 400                 | 150     | 350             | 110 |
| 8        | QJNT-01B-50b | 500                 | 150     | 450             | 110 |
| 9        | QJNT-01B-30c | 300                 | 200     | 250             | 160 |
| 10       | QJNT-01B-40c | 400                 | 200     | 350             | 160 |
| 11       | QJNT-01B-50c | 500                 | 200     | 450             | 160 |
| 12       | QJNT-01B-60c | 600                 | 200     | 550             | 160 |
| 13       | QJNT-01B-40d | 400                 | 250     | 350             | 210 |
| 14       | QJNT-01B-50d | 500                 | 250     | 450             | 210 |
| 15       | QJNT-01B-60d | 600                 | 250     | 550             | 210 |
| 16       | QJNT-01B-80d | 800                 | 250     | 750             | 210 |
| 17       | QJNT-01B-50e | 500                 | 300     | 450             | 260 |
| 18       | QJNT-01B-60e | 600                 | 300     | 550             | 260 |


| 序号<br>NO | 型号Model     | 外型尺寸Outerdimenslons |         | 内截面Innersection |     |
|----------|-------------|---------------------|---------|-----------------|-----|
|          |             | 宽Width              | 边高Heigh | 宽×高             | W×H |
| 1        | NTW-01B-15a | 150                 | 100     | 100             | 60  |
| 2        | NTW-01B-20a | 200                 | 100     | 150             | 60  |
| 3        | NTW-01B-30a | 300                 | 100     | 250             | 60  |
| 4        | NTW-01B-40a | 400                 | 100     | 350             | 60  |
| 5        | NTW-01B-20b | 200                 | 150     | 150             | 110 |
| 6        | NTW-01B-30b | 300                 | 150     | 250             | 110 |
| 7        | NTW-01B-40b | 400                 | 150     | 350             | 110 |
| 8        | NTW-01B-50b | 500                 | 150     | 450             | 110 |
| 9        | NTW-01B-30c | 300                 | 200     | 250             | 160 |
| 10       | NTW-01B-40c | 400                 | 200     | 350             | 160 |
| 11       | NTW-01B-50c | 500                 | 200     | 450             | 160 |
| 12       | NTW-01B-60c | 600                 | 200     | 550             | 160 |
| 13       | NTW-01B-40d | 400                 | 250     | 350             | 210 |
| 14       | NTW-01B-50d | 500                 | 250     | 450             | 210 |
| 15       | NTW-01B-60d | 600                 | 250     | 550             | 210 |
| 16       | NTW-01B-80d | 800                 | 250     | 750             | 210 |
| 17       | NTW-01B-50e | 500                 | 300     | 450             | 260 |
| 18       | NTW-01B-60e | 600                 | 300     | 550             | 260 |

## XQJ防火电缆桥架 XQJ Fire Resisting Support


XQJ-QJNT-NTBJ-02A变径接头  
XQJ-QJNT-NTBJ-02AReducer connector

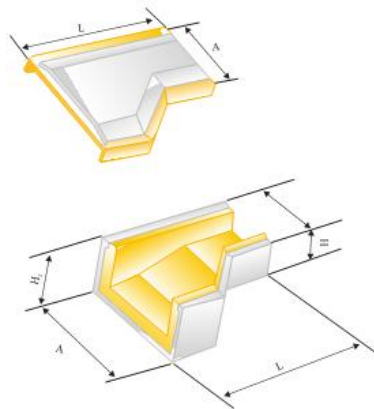

XQJ-QJNT-NTPW-02A水平弯通  
XQJ-QJNT-NTPW-02AHorizontal bend

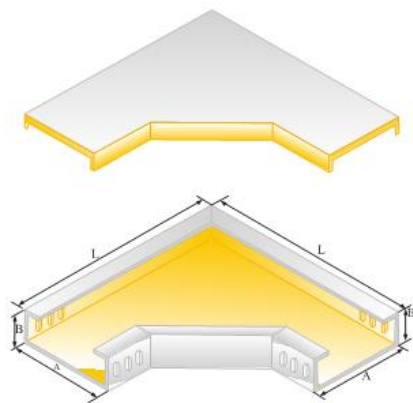

XQJ-QJNT-NTPA-03A水平三通  
XQJ-QJNT-NTPA-03AHorizontal Tee

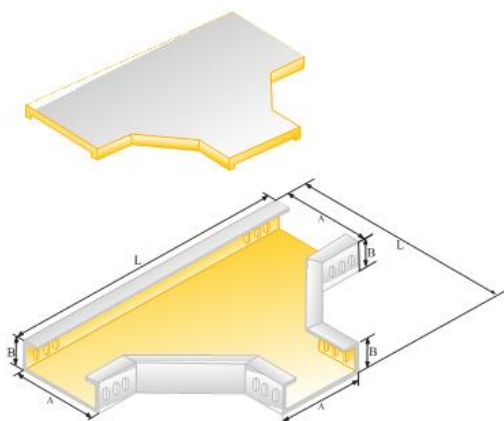

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTBJ-02A-20a | 200                      | 150          | 100                  | 110 |
| 2        | NTBJ-02A-30a | 300                      | 150          | 200                  | 110 |
| 3        | NTBJ-02A-40a | 400                      | 150          | 300                  | 110 |
| 4        | NTBJ-02A-50a | 500                      | 150          | 400                  | 110 |
| 5        | NTBJ-02A-30b | 300                      | 200          | 200                  | 160 |
| 6        | NTBJ-02A-40b | 400                      | 200          | 300                  | 160 |
| 7        | NTBJ-02A-50b | 500                      | 200          | 400                  | 160 |
| 8        | NTBJ-02A-60b | 600                      | 200          | 500                  | 160 |
| 9        | NTBJ-02A-40c | 400                      | 250          | 300                  | 210 |
| 10       | NTBJ-02A-50c | 500                      | 250          | 400                  | 210 |
| 11       | NTBJ-02A-60c | 600                      | 250          | 500                  | 210 |
| 12       | NTBJ-02A-80c | 800                      | 250          | 600                  | 210 |
| 13       | NTBJ-02A-50d | 500                      | 300          | 400                  | 260 |
| 14       | NTBJ-02A-60d | 600                      | 300          | 500                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTPW-02A-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTPW-02A-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTPW-02A-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTPW-02A-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTPW-02A-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTPW-02A-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTPW-02A-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTPW-02A-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTPW-02A-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTPW-02A-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTPW-02A-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTPW-02A-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTPW-02A-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTPW-02A-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTPW-02A-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTPW-02A-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTPW-02A-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTPW-02A-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTPA-03A-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTPA-03A-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTPA-03A-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTPA-03A-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTPA-03A-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTPA-03A-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTPA-03A-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTPA-03A-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTPA03A-30c  | 300                      | 200          | 250                  | 160 |
| 10       | NTPA-03A-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTPA-03A-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTPA-03A-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTPA-03A-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTPA-03A-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTPA-03A-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTPA-03A-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTPA-03A-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTPA-03A-60e | 600                      | 300          | 550                  | 260 |






## XQJ防火电缆桥架 XQJ Fire Resisting Support


XQJ-QJNT-NTXW-02B 垂直下弯通  
XQJ-QJNT-NTXW-02B Vertical downward bend

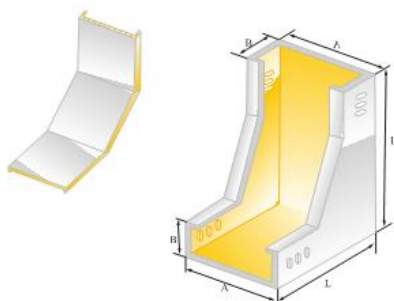

XQJ-QJNT-NTSW-02A 垂直上弯通  
XQJ-QJNT-NTSW-02A Vertical upward bend

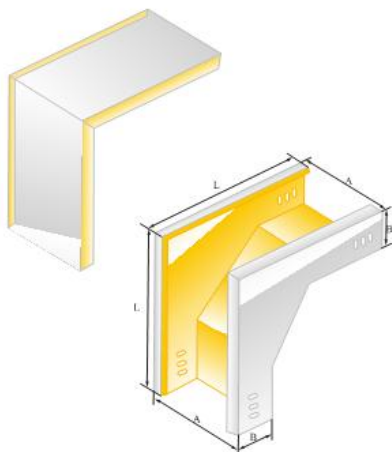

XQJ-QJNT-NTPS-04A 水平三通  
XQJ-QJNT-NTPS-04A Horizontal Tee

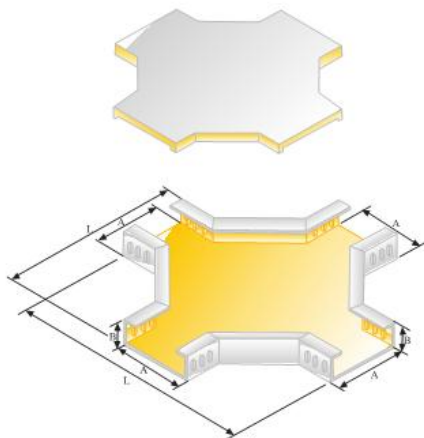

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTXW-02B-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTXW-02B-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTXW-02B-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTXW-02B-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTXW-02B-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTXW-02B-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTXW-02B-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTXW-02B-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTXW-02B-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTXW-02B-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTXW-02B-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTXW-02B-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTXW-02B-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTXW-02B-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTXW-02B-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTXW-02B-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTXW-02B-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTXW-02B-60e | 600                      | 300          | 550                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTSW-02B-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTSW-02B-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTSW-02B-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTSW-02A-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTSW-02B-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTSW-02B-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTSW-02B-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTSW-02B-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTSW-02B-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTSW-02B-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTSW-02B-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTSW-02B-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTSW-02B-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTSW-02B-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTSW-02B-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTSW-02B-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTSW-02B-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTSW-02B-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTPS-04A-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTPS-04A-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTPS-04A-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTPS-04A-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTPS-04A-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTPS-04A-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTPS-04A-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTPS-04A-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTPS-04A-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTPS-04A-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTPS-04A-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTPS-04A-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTPS-04A-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTPS-04A-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTPS-04A-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTPS-04A-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTPS-04A-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTPS-04A-60e | 600                      | 300          | 550                  | 260 |

## XQJ防火电缆桥架

### XQJ Fire Resisting Support


XQJ-QJNT-NTCA-03C 下垂直三通

XQJ-QJNT-NTCA 03C Bottom vertical Tee

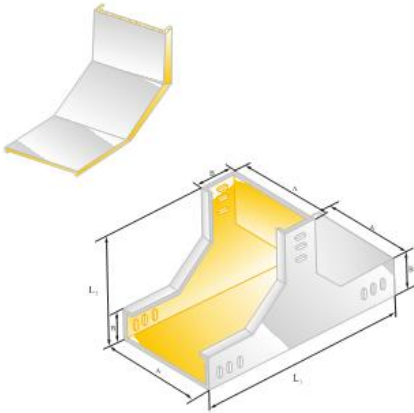


XQJ-QJNT-NTCA-03G 下角垂直三通

XQJ-QJNT-NTCA-03G Bottom corner vertical Tee

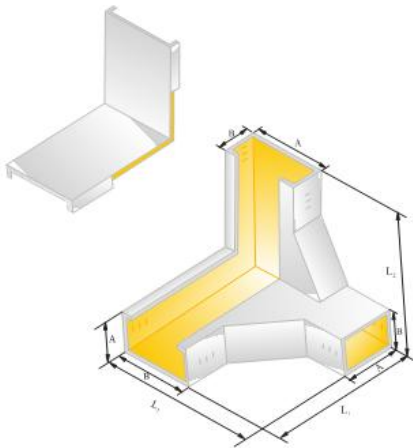

XQJ-QJNT-NTCA-03F 上角垂直三通

XQJ-QJNT-NTCA-03F Top corner vertical Tee

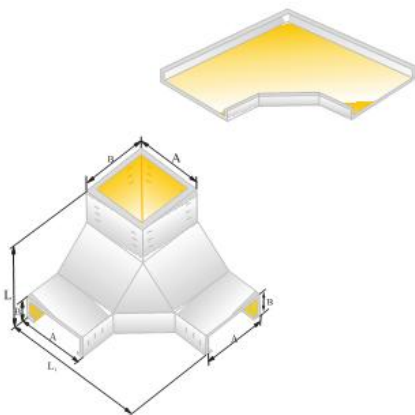

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03C-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03C-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03C-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03C-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03C-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03C-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03C-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03C-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03C-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03C-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03C-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03C-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03C-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03C-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03C-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03C-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03C-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03C-60e | 600                      | 300          | 550                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03G-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03G-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03G-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03G-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03G-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03G-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03G-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03G-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03G-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03G-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03G-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03G-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03G-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03G-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03G-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03G-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03G-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03G-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03F-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03F-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03F-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03F-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03F-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03F-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03F-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03F-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03F-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03F-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03F-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03F-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03F-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03F-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03F-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03F-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03F-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03F-60e | 600                      | 300          | 550                  | 260 |






## XQJ防火电缆桥架 XQJ Fire Resisting Support


XQJ-NTCA-03D 上边垂直三通  
XQJ-NTCA-03D Top side vertical Tee

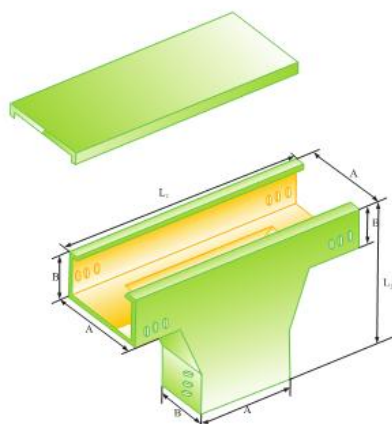

XQJ-NTNT-NTCA-03B 上垂直三通  
XQJ-NTNT-NTCA-03B Top vertical Tee

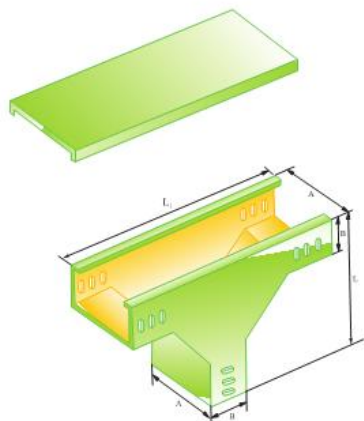

XQJ-QJNT-NTCA-03E 下边垂直三通  
XQJ-QJNT-NTCA-03E Bottom side vertical Tee

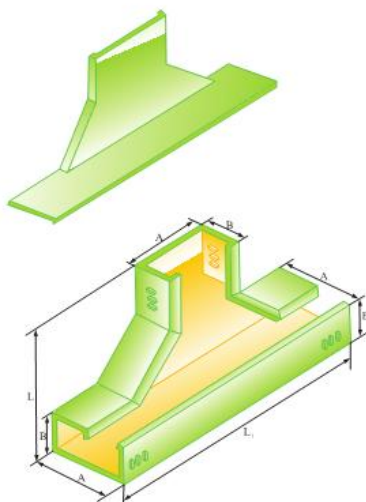


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03D-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03D-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03D-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03D-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03D-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03D-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03D-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03D-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03D-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03D-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03D-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03C-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03D-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03D-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03D-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03D-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03D-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03D-60e | 600                      | 300          | 550                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03B-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03B-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03B-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03B-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03B-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03B-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03B-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03B-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03B-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03B-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03B-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03B-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03B-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03B-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03B-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03B-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03B-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03B-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCA-03E-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCA-03E-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCA-03E-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCA-03E-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCA-03E-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCA-03E-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCA-03E-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCA-03E-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCA-03E-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCA-03E-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCA-03E-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCA-03E-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCA-03E-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCA-03E-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCA-03E-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCA-03E-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCA-03E-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCA-03E-60e | 600                      | 300          | 550                  | 260 |

## XQJ防火电缆桥架 XQJ Fire Resisting Support


XQJ-QJNT-NTXW-02F 垂直右下弯通  
XQJ-QJNT-NTXW-02F Vertical right downward bend

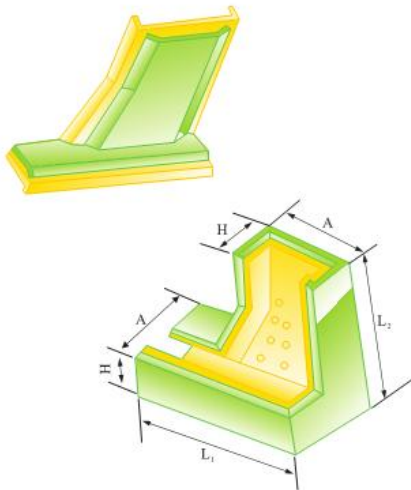

XQJ-QJNT-NTXW-02D 垂直左下弯通  
XQJ-QJNT-NTXW-02D Vertical left downward bend

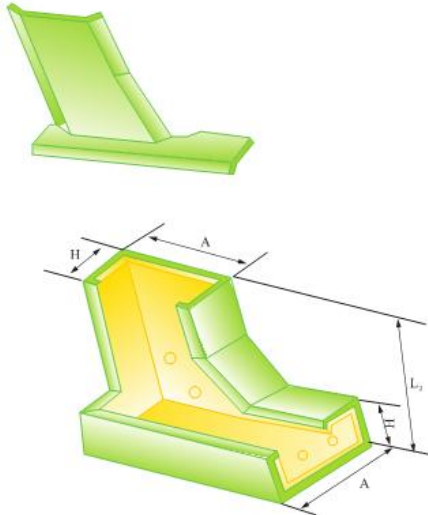

XQJ-QJNT-NTWG 无机防火隔板  
XQJ-QJNT-NTWG Fire prevention partition

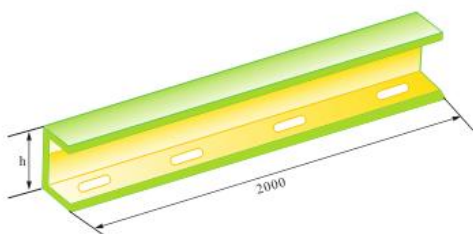

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTXW-02F-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTXW-02F-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTXW-02F-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTXW-02F-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTXW-02F-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTXW-02F-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTXW-02F-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTXW-02F-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTXW-02F-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTXW-02F-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTXW-02F-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTXW-02F-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTXW-02F-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTXW-02F-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTXW-02F-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTXW-02F-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTXW-02F-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTXW-02F-60e | 600                      | 300          | 550                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTXW-02D-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTXW-02D-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTXW-02D-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTXW-02D-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTXW-02D-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTXW-02D-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTXW-02D-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTXW-02D-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTXW-02D-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTXW-02D-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTXW-02D-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTXW-02D-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTXW-02D-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTXW-02D-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTXW-02D-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTXW-02D-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTXW-02D-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTXW-02D-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model | 规格<br>Size h | 配套宽度<br>Matching width |
|----------|-------------|--------------|------------------------|
| 1        | NTWG-5      | 40           | 50                     |
| 2        | NTWG-6      | 50           | 60                     |
| 3        | NTWG-7.5    | 65           | 75                     |
| 4        | NTWG-10     | 90           | 100                    |
| 5        | NTWG-12.5   | 115          | 125                    |
| 6        | NTWG-15     | 140          | 150                    |
| 7        | NTWG-20     | 190          | 200                    |
| 8        | NTWG-25     | 240          | 250                    |






## XQJ防火电缆桥架 XQJ Fire Resisting Support


XQJ-QJNT-NTSW-02E 垂直右上弯通  
XQJ-QJNT-NTSW-02E Vertical right upward bend

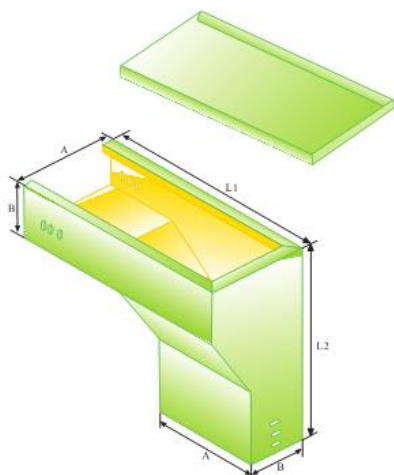

XQJ-QJNT-NTSW-02C 垂直左上弯通  
XQJ-QJNT-NTSW-02C Vertical upward bend

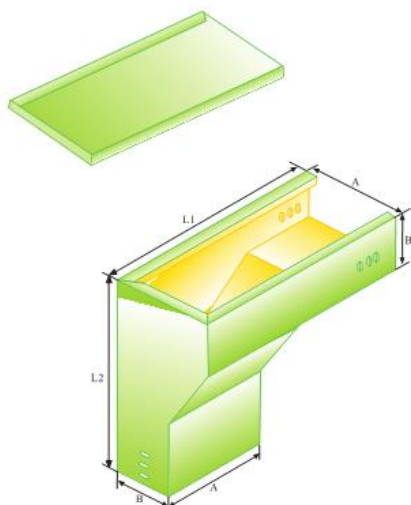

XQJ-QJNT-NTCS-04B上垂直四通  
XQJ-QJNT-NTCS-04B Top vertical Cross

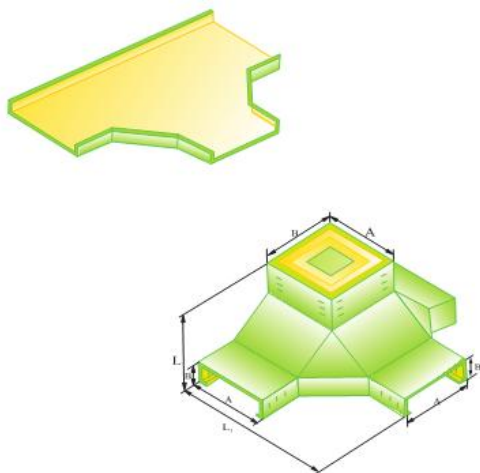

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTSW-02E-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTSW-02E-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTSW-02E-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTSW-02E-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTSW-02E-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTSW-02E-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTSW-02E-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTSW-02E-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTSW-02E-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTSW-02E-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTSW-02E-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTSW-02E-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTSW-02E-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTSW-02E-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTSW-02E-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTSW-02E-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTSW-02E-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTSW-02E-60e | 600                      | 300          | 550                  | 260 |

| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTSW-02C-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTSW-02C-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTSW-02C-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTSW-02C-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTSW-02C-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTSW-02C-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTSW-02C-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTSW-02C-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTSW-02C-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTSW-02C-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTSW-02C-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTSW-02C-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTSW-02C-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTSW-02C-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTSW-02C-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTSW-02C-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTSW-02C-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTSW-02C-60e | 600                      | 300          | 550                  | 260 |


| 序号<br>NO | 型号<br>Model  | 外型尺寸<br>Outer dimensions |              | 内截面<br>Inner section |     |
|----------|--------------|--------------------------|--------------|----------------------|-----|
|          |              | 槽宽<br>Width              | 边高<br>Height | 宽×高<br>W×H           |     |
| 1        | NTCS-04B-15a | 150                      | 100          | 100                  | 60  |
| 2        | NTCS-04B-20a | 200                      | 100          | 150                  | 60  |
| 3        | NTCS-04B-30a | 300                      | 100          | 250                  | 60  |
| 4        | NTCS-04B-40a | 400                      | 100          | 350                  | 60  |
| 5        | NTCS-04B-20b | 200                      | 150          | 150                  | 110 |
| 6        | NTCS-04B-30b | 300                      | 150          | 250                  | 110 |
| 7        | NTCS-04B-40b | 400                      | 150          | 350                  | 110 |
| 8        | NTCS-04B-50b | 500                      | 150          | 450                  | 110 |
| 9        | NTCS-04B-30c | 300                      | 200          | 250                  | 160 |
| 10       | NTCS-04B-40c | 400                      | 200          | 350                  | 160 |
| 11       | NTCS-04B-50c | 500                      | 200          | 450                  | 160 |
| 12       | NTCS-04B-60c | 600                      | 200          | 550                  | 160 |
| 13       | NTCS-04B-40d | 400                      | 250          | 350                  | 210 |
| 14       | NTCS-04B-50d | 500                      | 250          | 450                  | 210 |
| 15       | NTCS-04B-60d | 600                      | 250          | 550                  | 210 |
| 16       | NTCS-04B-80d | 800                      | 250          | 750                  | 210 |
| 17       | NTCS-04B-50e | 500                      | 300          | 450                  | 260 |
| 18       | NTCS-04B-60e | 600                      | 300          | 550                  | 260 |

## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support


阻燃玻璃钢电缆桥架是我厂在钢制电缆桥架等生产的基础上，研制的一种新产品。它具有强度高、绝缘性能好、耐化学腐蚀、耐火阻燃性能和足够的机械强度，广泛适用于石油、化工、冶金、电力等行业。

Flame-retardant fibreglass reinforced plastic cable support system is a new-type product developed by this factory on the basis of steel cable support systems. It is featured by high strength, fine insulation property, resistance to chemical corrosion, flame resistance and sufficient mechanical strength. It is broadly used in petroleum, chemical, metallurgical and power industries..


XQJ-ZBQ-C-01A1 阻燃槽式直通  
XQJ-ZBQ-C-01A1 Fire retarding  
Channel straight piece

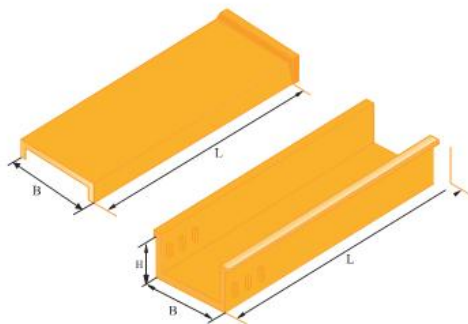

XQJ-ZBQ-C-01A2 阻燃槽式直通  
XQJ-ZBQ-C-01A2 Fire retarding channel  
straight piece

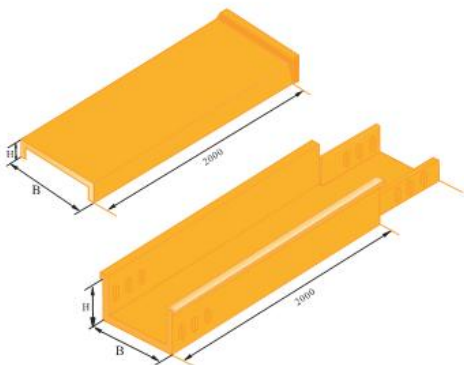

XQJ-ZBQ-C-01B 阻燃槽式直通短节  
XQJ-ZBQ-C-01B Fire retarding channel  
straight short piece

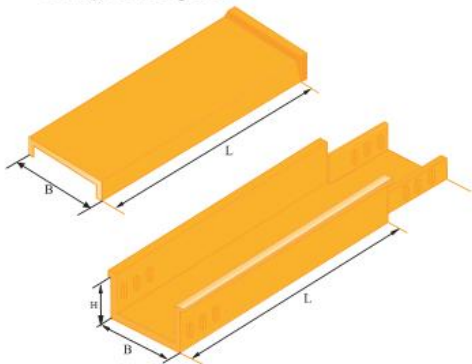

| 序号<br>NO | 型号<br>Model            | 规格A×B<br>Size | 厚度mm<br>Thickness |
|----------|------------------------|---------------|-------------------|
| 1        | ZBQ-C-01A <sub>1</sub> | 50×25         | 2                 |
| 2        | ZBQ-C-01A <sub>1</sub> | 100×50        | 2.5               |
| 3        | ZBQ-C-01A <sub>1</sub> | 150×75        | 3                 |
| 4        | ZBQ-C-01A <sub>1</sub> | 200×100       | 3                 |
| 5        | ZBQ-C-01A <sub>1</sub> | 250×125       | 3.5               |
| 6        | ZBQ-C-01A <sub>1</sub> | 300×150       | 3.5               |
| 7        | ZBQ-C-01A <sub>1</sub> | 400×200       | 4.5               |
| 8        | ZBQ-C-01A <sub>1</sub> | 500×200       | 5.5               |
| 9        | ZBQ-C-01A <sub>1</sub> | 600×200       | 6.5               |
| 10       | ZBQ-C-01A <sub>1</sub> | 800×200       | 7.5               |

| 序号<br>NO | 型号<br>Model            | 规格A×B<br>Size | 厚度mm<br>Thickness |
|----------|------------------------|---------------|-------------------|
| 1        | ZBQ-C-01A <sub>2</sub> | 50×25         | 2                 |
| 2        | ZBQ-C-01A <sub>2</sub> | 100×50        | 2.5               |
| 3        | ZBQ-C-01A <sub>2</sub> | 150×75        | 3                 |
| 4        | ZBQ-C-01A <sub>2</sub> | 200×100       | 3                 |
| 5        | ZBQ-C-01A <sub>2</sub> | 250×125       | 3.5               |
| 6        | ZBQ-C-01A <sub>2</sub> | 300×150       | 3.5               |
| 7        | ZBQ-C-01A <sub>2</sub> | 400×200       | 4.5               |
| 8        | ZBQ-C-01A <sub>2</sub> | 500×200       | 5.5               |
| 9        | ZBQ-C-01A <sub>2</sub> | 600×200       | 6.5               |
| 10       | ZBQ-C-01A <sub>2</sub> | 800×200       | 7.5               |


| 序号<br>NO | 型号<br>Model | 规格A×B<br>Size | 厚度mm<br>Thickness | 备注<br>Remarks                                                                                                                                                                  |
|----------|-------------|---------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | ZBQ-C-01B   | 50×25         | 2                 | L的长度有<br>500、1000、<br>1500三种请按<br>您设计图纸按<br>需订货<br><br>Three sizes<br>are available<br>or L: 500, 1000<br>and 1500.<br>Please order<br>according to<br>your design<br>drawings |
| 2        | ZBQ-C-01B   | 100×50        | 2.5               |                                                                                                                                                                                |
| 3        | ZBQ-C-01B   | 150×75        | 3                 |                                                                                                                                                                                |
| 4        | ZBQ-C-01B   | 200×100       | 3                 |                                                                                                                                                                                |
| 5        | ZBQ-C-01B   | 250×125       | 3.5               |                                                                                                                                                                                |
| 6        | ZBQ-C-01B   | 300×150       | 3.5               |                                                                                                                                                                                |
| 7        | ZBQ-C-01B   | 400×200       | 4.5               |                                                                                                                                                                                |
| 8        | ZBQ-C-01B   | 500×200       | 5.5               |                                                                                                                                                                                |
| 9        | ZBQ-C-01B   | 600×200       | 6.5               |                                                                                                                                                                                |
| 10       | ZBQ-C-01B   | 800×200       | 7.5               |                                                                                                                                                                                |



## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support


XQJ-ZBQ-01A<sub>1</sub> 阻燃槽式大跨距桥架

XQJ-ZBQ-01A<sub>1</sub> Fire retarding large span support

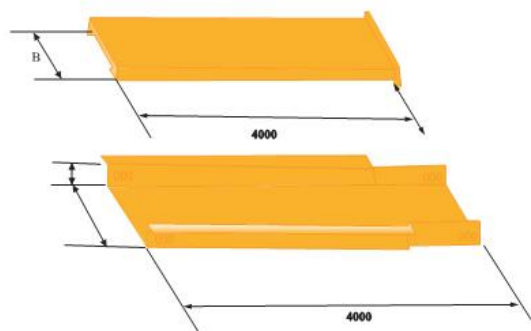

XQJ-ZBQ-P 阻燃托盘式桥架

XQJ-ZBQ-P Fire retarding tray type support

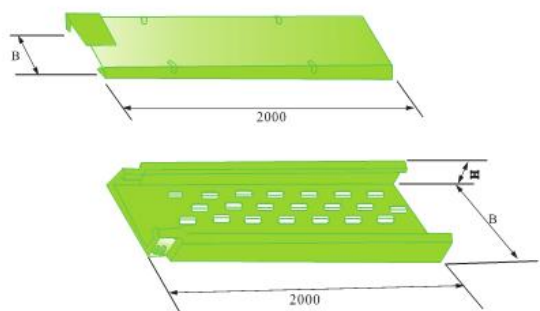

- (1) This type of Support is provided with cover please indicate in order when required
- (2) The bend for straight tray support is the same as for channel type .


| 序号<br>NO | 型号<br>Model             | 规格<br>Size | 序号<br>NO | 型号<br>Model             | 规格<br>Size |
|----------|-------------------------|------------|----------|-------------------------|------------|
| 1        | ZBQ-DC-01A <sub>1</sub> | 50×25      | 1        | ZBQ-DC-01A <sub>2</sub> | 50×25      |
| 2        | ZBQ-DC-01A <sub>1</sub> | 100×50     | 2        | ZBQ-DC-01A <sub>2</sub> | 100×50     |
| 3        | ZBQ-DC-01A <sub>1</sub> | 150×75     | 3        | ZBQ-DC-01A <sub>2</sub> | 150×75     |
| 4        | ZBQ-DC-01A <sub>1</sub> | 200×100    | 4        | ZBQ-DC-01A <sub>2</sub> | 200×100    |
| 5        | ZBQ-DC-01A <sub>1</sub> | 250×125    | 5        | ZBQ-DC-01A <sub>2</sub> | 250×125    |
| 6        | ZBQ-DC-01A <sub>1</sub> | 300×150    | 6        | ZBQ-DC-01A <sub>2</sub> | 300×150    |
| 7        | ZBQ-DC-01A <sub>1</sub> | 400×200    | 7        | ZBQ-DC-01A <sub>2</sub> | 400×200    |
| 8        | ZBQ-DC-01A <sub>1</sub> | 500×200    | 8        | ZBQ-DC-01A <sub>2</sub> | 500×200    |
| 9        | ZBQ-DC-01A <sub>1</sub> | 600×200    | 9        | ZBQ-DC-01A <sub>2</sub> | 600×200    |
| 10       | ZBQ-DC-01A <sub>1</sub> | 800×200    | 10       | ZBQ-DC-01A <sub>2</sub> | 800×200    |

| 序号<br>NO | 型号<br>Model   | b<br>mm | b<br>mm | 备注<br>Remarks                                                                                                                  |
|----------|---------------|---------|---------|--------------------------------------------------------------------------------------------------------------------------------|
| 1        | ZBQ-P-01-6-2  | 200     | 60      | 高度h为60时、100时，两端各6只连接孔。<br>高度h为150时两端各12只连接孔。                                                                                   |
| 2        | ZBQ-P-01-10-2 |         | 100     |                                                                                                                                |
| 3        | ZBQ-P-01-15-2 |         | 150     |                                                                                                                                |
| 4        | ZBQ-P-01-6-2  | 300     | 60      | There are 6 connection holes at each end for height=60 and h=100<br>There are 12 connection holes at each end for height h=150 |
| 5        | ZBQ-P-01-10-3 |         | 100     |                                                                                                                                |
| 6        | ZBQ-P-01-15-3 |         | 150     |                                                                                                                                |
| 7        | ZBQ-P-01-6-4  | 400     | 60      |                                                                                                                                |
| 8        | ZBQ-P-01-10-4 |         | 100     |                                                                                                                                |
| 9        | ZBQ-P-01-15-4 |         | 150     |                                                                                                                                |
| 10       | ZBQ-P-01-6-5  | 500     | 60      |                                                                                                                                |
| 11       | ZBQ-P-01-10-5 |         | 100     |                                                                                                                                |
| 12       | ZBQ-P-01-15-5 |         | 150     |                                                                                                                                |
| 13       | ZBQ-P-01-6-6  | 600     | 60      |                                                                                                                                |
| 14       | ZBQ-P-01-10-6 |         | 100     |                                                                                                                                |
| 15       | ZBQ-P-01-15-6 |         | 150     |                                                                                                                                |


### 阻燃桥架连接方式

#### Connection of fire retarding supports

插接式  
Socket type connection

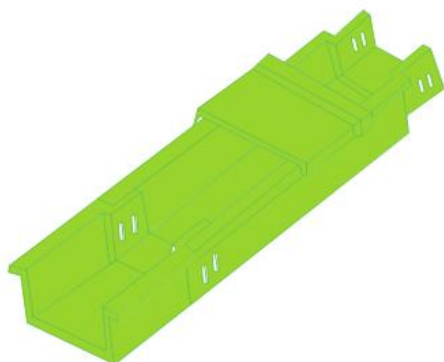


直接式  
Direct connection

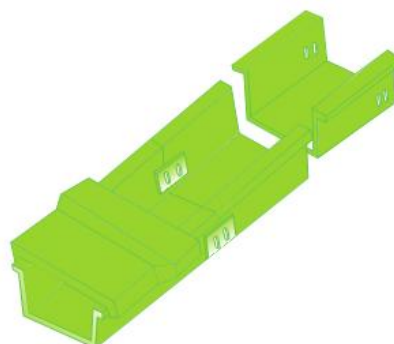


## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support


XQJ-ZBQ-C-06C阻燃槽式异径接头  
XQJ-ZBQ-C-06C Fire retarding reducer connect0r

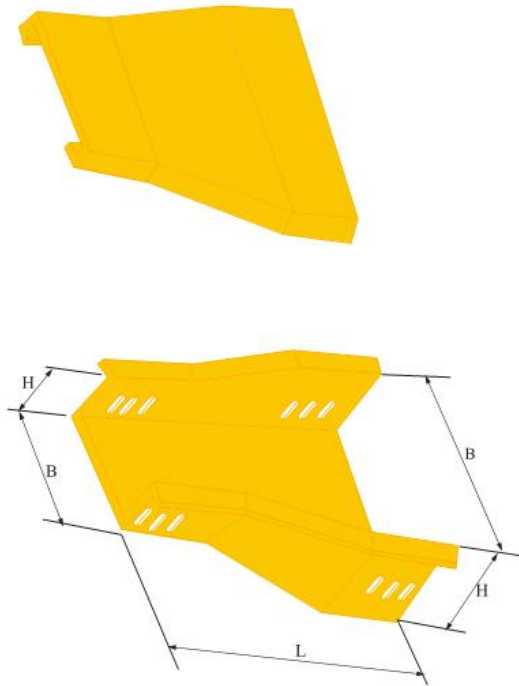

XQJ-ZBQ-C-01C封头  
XQJ-ZBQ-C-01C Head

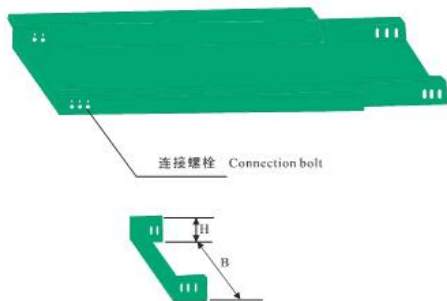

XQJ-ZBQ-C-07阻燃桥架隔板  
XQJ-ZBQ-C-07 Fire retarding support partition



| 序号<br>NO | 型号<br>Model  | 规格A×B<br>Size   | 长度L<br>Lenght |
|----------|--------------|-----------------|---------------|
| 1        | ZBQ-C-06C-1  | 50×25-100×50    | 200           |
| 2        | ZBQ-C-06C-2  | 50×25-150×75    | 250           |
| 3        | ZBQ-C-06C-3  | 50×25-200×100   | 300           |
| 4        | ZBQ-C-06C-4  | 50×25-250×125   | 350           |
| 5        | ZBQ-C-06C-5  | 50×25-300×150   | 500           |
| 6        | ZBQ-C-06C-6  | 50×25-400×200   | 600           |
| 7        | ZBQ-C-06C-7  | 50×25-600×200   | 700           |
| 8        | ZBQ-C-06C-8  | 50×25-800×200   | 800           |
| 9        | ZBQ-C-06C-9  | 50×25-150×75    | 1000          |
| 10       | ZBQ-C-06C-10 | 100×50-200×100  | 250           |
| 11       | ZBQ-C-06C-11 | 100×50-200×100  | 300           |
| 12       | ZBQ-C-06C-12 | 100×50-250×125  | 350           |
| 13       | ZBQ-C-06C-13 | 100×50-300×150  | 500           |
| 14       | ZBQ-C-06C-14 | 100×400×200     | 600           |
| 15       | ZBQ-C-06C-15 | 100×50-500×200  | 700           |
| 16       | ZBQ-C-06C-16 | 100×50-600×200  | 800           |
| 17       | ZBQ-C-06C-17 | 100×50-800×200  | 1000          |
| 18       | ZBQ-C-06C-18 | 150×75-200×100  | 250           |
| 19       | ZBQ-C-06C-19 | 150×75-250×125  | 300           |
| 20       | ZBQ-C-06C-20 | 150×75-300×150  | 450           |
| 21       | ZBQ-C-06C-21 | 150×75-400×200  | 550           |
| 22       | ZBQ-C-06C-22 | 150×75-500×200  | 650           |
| 23       | ZBQ-C-06C-23 | 150×75-600×200  | 750           |
| 24       | ZBQ-C-06C-24 | 150×75-800×200  | 900           |
| 25       | ZBQ-C-06C-25 | 200×100-250×125 | 250           |
| 26       | ZBQ-C-06C-26 | 200×100-300×150 | 400           |
| 27       | ZBQ-C-06C-27 | 200×100-400×200 | 500           |
| 28       | ZBQ-C-06C-28 | 200×100-500×200 | 600           |
| 29       | ZBQ-C-06C-29 | 200×100-600×200 | 700           |
| 30       | ZBQ-C-06C-30 | 200×100-800×200 | 900           |
| 31       | ZBQ-C-06C-31 | 250×125-300×150 | 350           |
| 32       | ZBQ-C-06C-32 | 250×125-400×200 | 450           |
| 33       | ZBQ-C-06C-33 | 250×125-500×200 | 550           |
| 34       | ZBQ-C-06C-34 | 250×125-600×200 | 650           |
| 35       | ZBQ-C-06C-35 | 250×125-800×200 | 850           |
| 36       | ZBQ-C-06C-36 | 300×150-400×200 | 500           |
| 37       | ZBQ-C-06C-37 | 300×150-500×200 | 600           |
| 38       | ZBQ-C-06C-38 | 300×150-600×200 | 700           |
| 39       | ZBQ-C-06C-39 | 300×150-800×200 | 900           |
| 40       | ZBQ-C-06C-40 | 400×200-500×200 | 500           |
| 41       | ZBQ-C-06C-41 | 400×200-600×200 | 600           |
| 42       | ZBQ-C-06C-42 | 400×200-800×200 | 800           |
| 43       | ZBQ-C-06C-43 | 500×200-600×200 | 500           |
| 44       | ZBQ-C-06C-44 | 500×200-800×200 | 600           |
| 45       | ZBQ-C-06C-45 | 600×300-800×200 | 700           |


| 序号<br>NO | 型号<br>Model  | 规格 Size |                                |
|----------|--------------|---------|--------------------------------|
|          |              | A×B     | A <sub>1</sub> ×B <sub>1</sub> |
| 1        | ZBQ-C-01C-1  | 50×25   | 43×20                          |
| 2        | ZBQ-C-01C-2  | 100×50  | 86×44                          |
| 3        | ZBQ-C-01C-3  | 150×75  | 137×68                         |
| 4        | ZBQ-C-01C-4  | 200×100 | 184×90                         |
| 5        | ZBQ-C-01C-5  | 250×125 | 236×114                        |
| 6        | ZBQ-C-01C-6  | 300×150 | 286×140                        |
| 7        | ZBQ-C-01C-7  | 400×200 | 386×186                        |
| 8        | ZBQ-C-01C-8  | 500×200 | 484×186                        |
| 9        | ZBQ-C-01C-9  | 600×200 | 584×184                        |
| 10       | ZBQ-C-01C-10 | 800×200 | 782×184                        |

| 序号<br>NO | 型号<br>Model  | 配套高度<br>Matching height | h<br>mm |
|----------|--------------|-------------------------|---------|
| 1        | ZBQ-C-07-50  | 50                      | 40      |
| 2        | ZBQ-C-07-75  | 75                      | 65      |
| 3        | ZBQ-C-07-100 | 100                     | 90      |
| 4        | ZBQ-C-07-125 | 125                     | 115     |
| 5        | ZBQ-C-07-150 | 150                     | 140     |
| 6        | ZBQ-C-07-200 | 200                     | 190     |




## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support


XQJ-ZBQ-02A 阻燃槽式水平弯通  
XQJ-ZBQ-02A Fire retarding channel  
type horizontal bend



XQJ-ZBQ-C-03A 阻燃槽式水平三通  
XQJ-ZBQ-C-03A Fire retarding channel  
type horizontal bend

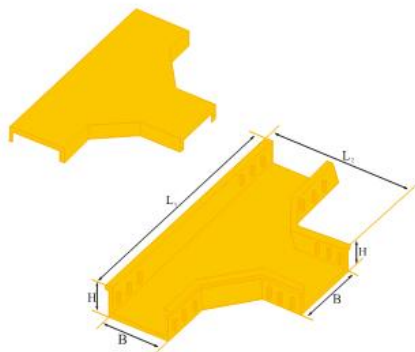

XQJ-ZBQ-C-04A 阻燃槽式水平四通  
XQJ-ZBQ-C-04A Fire retarding channel  
type horizontal Cross

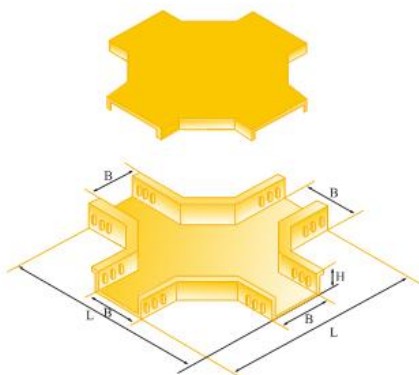

| 序号<br>NO | 型号<br>Model | 规格A×B<br>Size | 长度L<br>Lenght | 厚度mm<br>Thickness |
|----------|-------------|---------------|---------------|-------------------|
| 1        | C-2A-1      | 50×25         | 200           | 2                 |
| 2        | C-2A-2      | 100×50        | 250           | 2.5               |
| 3        | C-2A-3      | 150×75        | 325           | 3                 |
| 4        | C-2A-4      | 200×100       | 400           | 3                 |
| 5        | C-2A-5      | 250×125       | 475           | 3.5               |
| 6        | C-2A-6      | 300×150       | 550           | 3.5               |
| 7        | C-2A-7      | 400×200       | 700           | 4.5               |
| 8        | C-2A-8      | 500×200       | 800           | 5.5               |
| 9        | C-2A-9      | 600×200       | 900           | 6.5               |
| 10       | C-2A-10     | 800×200       | 1100          | 7.5               |

| 序号<br>NO | 型号<br>Model | 规格A×B<br>Size | 长度L Lenght     |                |
|----------|-------------|---------------|----------------|----------------|
|          |             |               | L <sub>1</sub> | L <sub>2</sub> |
| 1        | C-3A-1      | 50×25         | 350            | 200            |
| 2        | C-3A-2      | 100×50        | 400            | 250            |
| 3        | C-3A-3      | 150×75        | 500            | 325            |
| 4        | C-3A-4      | 200×100       | 600            | 400            |
| 5        | C-3A-5      | 250×125       | 700            | 475            |
| 6        | C-3A-6      | 300×150       | 800            | 550            |
| 7        | C-3A-7      | 400×200       | 1000           | 700            |
| 8        | C-3A-8      | 500×200       | 1100           | 800            |
| 9        | C-3A-9      | 600×200       | 1200           | 900            |
| 10       | C-3A-10     | 800×200       | 1400           | 1000           |

| 序号<br>NO | 型号<br>Model | 规格A×B<br>Size | 长度L<br>Lenght |
|----------|-------------|---------------|---------------|
| 1        | C-4A-1      | 50×25         | 350           |
| 2        | C-4A-2      | 100×50        | 400           |
| 3        | C-4A-3      | 150×75        | 500           |
| 4        | C-4A-4      | 200×100       | 600           |
| 5        | C-4A-5      | 250×125       | 700           |
| 6        | C-4A-6      | 300×150       | 800           |
| 7        | C-4A-7      | 400×200       | 1000          |
| 8        | C-4A-8      | 500×200       | 1100          |
| 9        | C-4A-9      | 600×200       | 1200          |
| 10       | C-4A-10     | 800×200       | 1400          |

## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support

XQJ-ZBQ-2A-01组合式阻燃玻璃钢桥架  
 XQJ-ZBQ-2A-01A Combined fire retarding FRP piece



| 序号<br>NO | 型号<br>Model    | 规格b×h<br>Size | 备注<br>Remarks |
|----------|----------------|---------------|---------------|
| 1        | ZBQ-ZH-01A-100 | 100×25        |               |
| 2        | ZBQ-ZH-01A-150 | 150×25        |               |
| 3        | ZBQ-ZH-01A-200 | 200×25        |               |

组合式阻燃玻璃钢桥架XQJ-ZBQ-2A-01A组装形式  
 Assembling form of XQJ-ZBQ-2A-01A combined fire retarding FRP piece







## XQJ 阻燃玻璃钢电缆桥架 XQJ Fire Retarding FRP Support

### 主要技术指标 Main Technical Data

#### 1、阻燃性能指标

| 序号 | 名称   | 指标        | 试验方法          |
|----|------|-----------|---------------|
| 1  | 氧指数  | $\geq 31$ | GB2406-80     |
| 2  | 水平燃烧 | 1级        | GB2408-80     |
| 3  | 垂直燃烧 | FY-0级     | BG4608-84     |
| 4  | 斜面燃烧 | 1级        | TISA1322-66/1 |

#### 2、基本物理性能

| 序号 | 名称    | 指标                                  | 试验方法      |
|----|-------|-------------------------------------|-----------|
| 1  | 抗压强度  | $\geq 350\text{kg/cm}$              | GB1448-83 |
| 2  | 抗压强度  | $\geq 1000\text{kg/cm}^2$           | GB1447-83 |
| 3  | 抗弯曲强度 |                                     | GB1449-83 |
| 4  | 抗冲击强度 | $\geq 80\text{kgcm/cm}^2$           | GB1451-83 |
| 5  | 线膨胀系数 | $2.5 \times 10^{-5}/^\circ\text{C}$ | GB2572-81 |
| 6  | 导热系数  | $0.36\text{w}/(\text{m}^2\text{k})$ | GB3133-82 |

3.密度：1650~1750公斤米<sup>3</sup>

4.耐火性能：经800℃源作用15分钟

5.槽盒负载能力：均布载荷80kg/m，集中载荷180kg/m

6.外观光滑、平整、无龟裂。

7.槽盒屏蔽性能：

8.使用环境：-40℃~80℃

9.温度接地：槽体内有角钢内敷，节与节之间用引线相联。

#### XQJ-ZBQ-C-03A Fire retarding channel type horizontal bend

| S.N | Description           | Data       | Test Method   |
|-----|-----------------------|------------|---------------|
| 1   | Oxygen Index          | $\geq 31$  | GB2406-80     |
| 2   | Horizontal Combustion | 1st Class  | GB2408-80     |
| 3   | Vertical Combustion   | Class FY-0 | GB4608-84     |
| 4   | Slope Combustion      | 1st Class  | TISA1322-66/1 |

#### XQJ-ZBQ-C-03A Fire retarding channel type horizontal bend

| S.N | Description                  | Data                                | Test Method |
|-----|------------------------------|-------------------------------------|-------------|
| 1   | Compression Strength         | $\geq 350\text{kg/cm}$              | GB1448-83   |
| 2   | Compression Strength         | $\geq 1000\text{kg/cm}^2$           | GB1447-83   |
| 3   | Bending Strength             |                                     | BG1449-83   |
| 4   | Resistance to Impact         | $\geq 80\text{kgcm/cm}^2$           | BG1451-83   |
| 5   | Linear Expansion Coefficient | $2.5 \times 10^{-5}/^\circ\text{C}$ | BG2572-81   |
| 6   | Thermal Conductivity         | $0.36\text{w}/(\text{m}^2\text{k})$ | BG3133-82   |

3.Density: 1650-1750kgm<sup>3</sup>

4.Fire-inhibiting property: 15minutes under effect of fire at 800℃

5.Channel loading capacity: 80kg/m for evenly-kistributed load, 180kg/m for concentrated load

6.Appearance: Smooth, level without cracks.

7.Channel shielding property:

8.Ambient temperature for application: -40℃~80℃


9.Temperature earthing: The channel is lined with angle steel and sections are connected with leads.

XQJ-LQJ 铝合金电缆桥架

XQJ-Anti-corrosive Al-alloy Support

铝合金抗腐蚀桥架，它具有结构简单、式样新颖、载  
荷大重量轻、耐腐蚀。使用寿命长，安装方便。适用于  
一般环境地区，在沿海临雾地区、高湿度和有腐蚀性的  
环境中，更能显示出它的独特抗腐蚀性能。

The aluminium alloy anti-corrosion cable support  
system is featured by simple structure, novel style, great  
loading capacity, small weight corrosion resistance, long  
service life and convenient. And is prominent anti-corrosion  
property will be shown more clearly when used in salty and  
foggy coastal areas and highly-humid and corrosive environment.

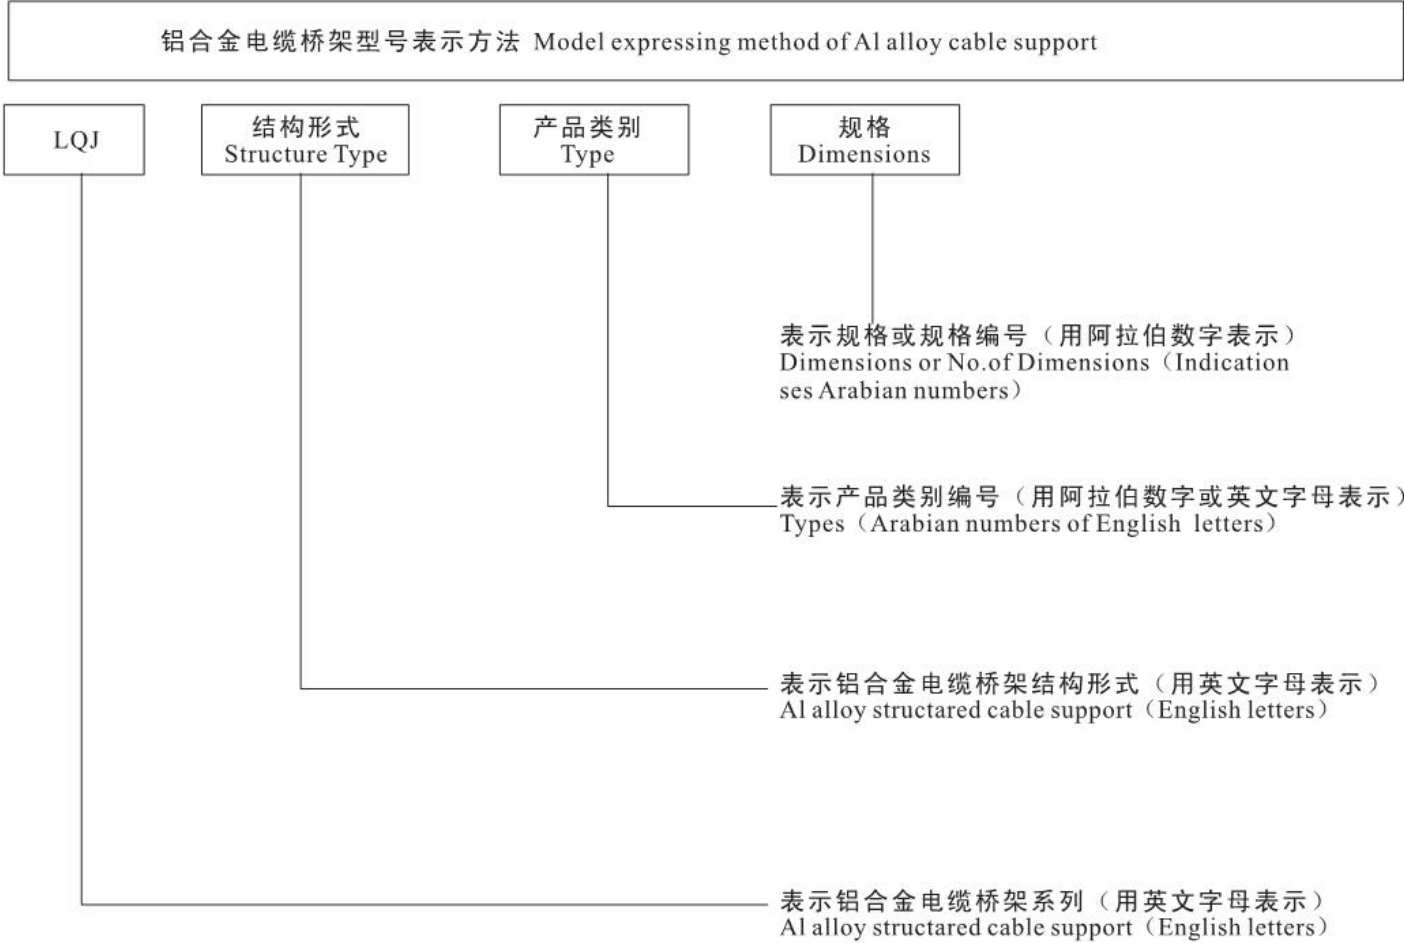

铝合金电缆桥架型号代用表示方法

铝合金电缆桥架在某种结构形式中无其它结构形式  
中的某一种产品类别，选型可作代用表示。例如：在  
LQU-CC型槽式铝合金电缆桥架结构形式中，无铝合金  
配线桥架中的LPC-03D上边垂直三通接头，此时在选型  
编写时原系列，结构形式、规格不变，只取产品类别编  
号03D，即表示为LQJ-CC-03D。

If there is no such identical models in a required  
circumstance, the choosed models can be used, For  
example, in the structural form of Lqu-CC channel type  
AL-alloy cable cable support system, there is no LPC-03D  
top side vertical tee, but the series or sizes are the same  
namely LQJ-CC-03D.




## XQJ-LQJ 铝合金电缆桥架


### XQJ-LQJ Anti-corrosive Al-alloy Support

铝合金电缆桥架空间布置示意图  
Spatial schematic map for Al alloy cable support


铝合金梯级式电缆桥架空间布置图  
Spatial schematic map for Al alloy ladder-type cable support

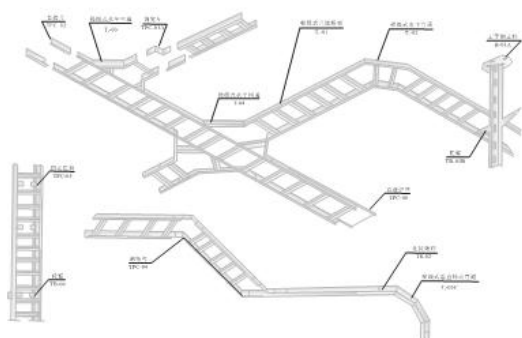

铝合金托盘式电缆桥架空间布置图  
Spatial schematic map for Al alloy ladder-type cable support

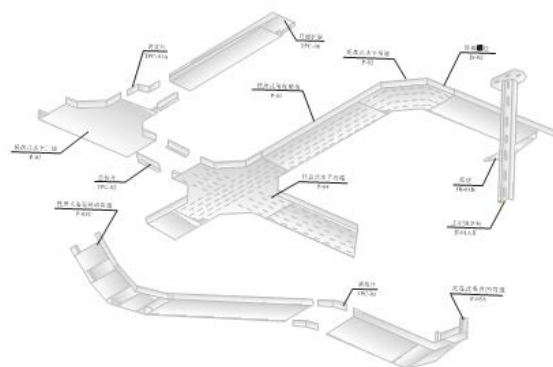


铝合金槽式电缆桥架空间布置图  
Spatial schematic map for Al alloy channel-type cable support

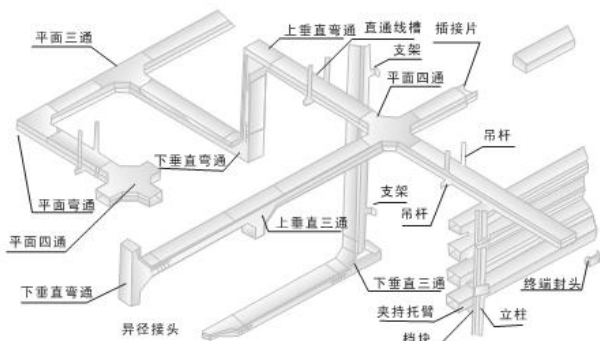

铝合金电缆桥架载荷曲线  
Load curve for Al alloy cable support


LQJ-A 型铝合金电缆桥架载荷曲线  
Load curve for Type LQJ-A AL alloy cable support

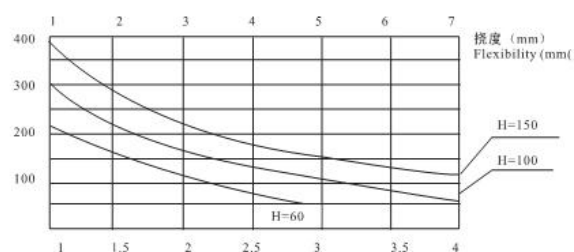

跨距 (m)  
span (m)

注: 支撑跨距推荐规范  $\leq 2000\text{mm}$   
Notes: Recommended span  $\leq 2000\text{mm}$


LQJ-B 型铝合金电缆桥架载荷曲线  
Load curve for Type LQJ-B AL alloy cable support

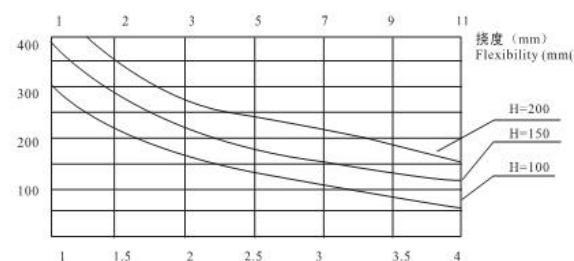

跨距 (m)  
span (m)

注: 支撑跨距推荐规范  $\leq 2000\text{mm}$   
Notes: Recommended span  $\leq 2000\text{mm}$

LQJ-B 型铝合金电缆桥架载荷曲线  
Load curve for Type LQJ-B AL alloy cable support

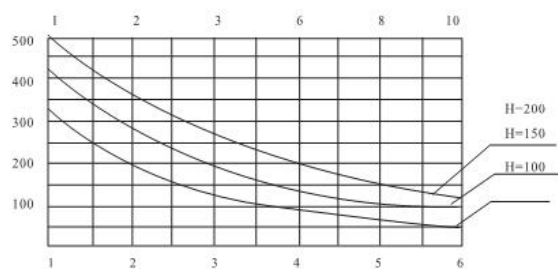

跨距 (m)  
span (m)

注: 支撑跨距推荐规范 2000-3000mm  
(视条件  $\leq 6000\text{mm}$ )  
Notes: Recommended dimension for supporting span: 2000-3000mm  
(if possible  $\leq 6000\text{mm}$ )

## XQJ-LQJ 铝合金电缆桥架


### XQJ-Anti-corrosive Al-alloy Support

XQJ-LQJ-01AT型铝合金梯级桥架  
Type XQJ-LQJ-01ATAlalloyladdertype cable support




| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                                |
|--------------|-----------|-----------|-----------|-------------|--------------------------------------------------------------------------------------------------------------|
| LQJ-01AT-62  | 60        | 200       | 2000      | 5.02        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                        |
| LQJ-01AT-63  |           | 300       |           | 5.04        |                                                                                                              |
| LQJ-01AT-64  |           | 400       |           | 6.05        |                                                                                                              |
| LQJ-01AT-65  |           | 500       | 3000      | 6.80        |                                                                                                              |
| LQJ-01AT-66  |           | 600       |           | 8.10        |                                                                                                              |
| LQJ-01AT-68  |           | 800       |           | 9.25        |                                                                                                              |
| LQJ-01AT-102 | 100       | 200       | 2000      | 5.80        | Ladder<br>rein<br>forcing<br>section<br>is<br>provided<br>for those<br>B<br>with<br>dimension<br>over<br>500 |
| LQJ-01AT-103 |           | 300       |           | 6.15        |                                                                                                              |
| LQJ-01AT-104 |           | 400       |           | 7.20        |                                                                                                              |
| LQJ-01AT-105 |           | 500       | 3000      | 8.10        |                                                                                                              |
| LQJ-01AT-106 |           | 600       |           | 9.60        |                                                                                                              |
| LQJ-01AT-108 |           | 800       |           | 10.80       |                                                                                                              |
| LQJ-01AT-152 | 150       | 200       | 2000      | 6.85        |                                                                                                              |
| LQJ-01AT-153 |           | 300       |           | 7.55        |                                                                                                              |
| LQJ-01AT-154 |           | 400       |           | 8.30        |                                                                                                              |
| LQJ-01AT-155 |           | 500       | 3000      | 9.10        |                                                                                                              |
| LQJ-01AT-156 |           | 600       |           | 10.60       |                                                                                                              |
| LQJ-01AT-158 |           | 800       |           | 12.40       |                                                                                                              |

XQJ-LQJ-01AP型铝合金托盘桥架  
Type XQJ-LQJ-01APAl alloy tray t

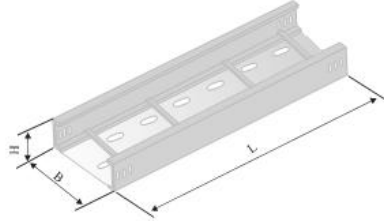


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                                |
|--------------|-----------|-----------|-----------|-------------|--------------------------------------------------------------------------------------------------------------|
| LQJ-01AT-62  | 60        | 200       | 2000      | 5.80        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                        |
| LQJ-01AT-63  |           | 300       |           | 7.54        |                                                                                                              |
| LQJ-01AT-64  |           | 400       |           | 8.70        |                                                                                                              |
| LQJ-01AT-65  |           | 500       | 3000      | 9.80        |                                                                                                              |
| LQJ-01AT-66  |           | 600       |           | 12.40       |                                                                                                              |
| LQJ-01AT-68  |           | 800       |           | 14.10       |                                                                                                              |
| LQJ-01AT-102 | 100       | 200       | 2000      | 6.70        | Ladder<br>rein<br>forcing<br>section<br>is<br>provided<br>for those<br>B<br>with<br>dimension<br>over<br>500 |
| LQJ-01AT-103 |           | 300       |           | 8.50        |                                                                                                              |
| LQJ-01AT-104 |           | 400       |           | 9.70        |                                                                                                              |
| LQJ-01AT-105 |           | 500       | 3000      | 10.60       |                                                                                                              |
| LQJ-01AT-106 |           | 600       |           | 13.40       |                                                                                                              |
| LQJ-01AT-108 |           | 800       |           | 15.20       |                                                                                                              |
| LQJ-01AT-152 | 150       | 200       | 2000      | 7.60        |                                                                                                              |
| LQJ-01AT-153 |           | 300       |           | 9.40        |                                                                                                              |
| LQJ-01AT-154 |           | 400       |           | 10.60       |                                                                                                              |
| LQJ-01AT-155 |           | 500       | 3000      | 11.90       |                                                                                                              |
| LQJ-01AT-156 |           | 600       |           | 13.60       |                                                                                                              |
| LQJ-01AT-158 |           | 800       |           | 16.10       |                                                                                                              |

XQJ-LQJ-01AC型铝合金槽式桥架  
Type XQJ-LQJ-01ACAl alloy channel type cable support

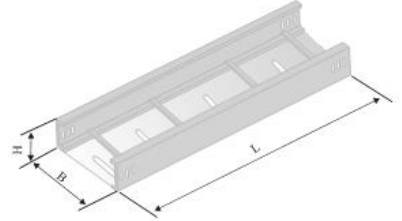


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                                |
|--------------|-----------|-----------|-----------|-------------|--------------------------------------------------------------------------------------------------------------|
| LQJ-01AT-62  | 60        | 200       | 2000      | 5.90        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                        |
| LQJ-01AT-63  |           | 300       |           | 7.80        |                                                                                                              |
| LQJ-01AT-64  |           | 400       |           | 8.70        |                                                                                                              |
| LQJ-01AT-65  |           | 500       | 3000      | 9.90        |                                                                                                              |
| LQJ-01AT-66  |           | 600       |           | 12.70       |                                                                                                              |
| LQJ-01AT-68  |           | 800       |           | 14.40       |                                                                                                              |
| LQJ-01AT-102 | 100       | 200       | 2000      | 6.80        | Ladder<br>rein<br>forcing<br>section<br>is<br>provided<br>for those<br>B<br>with<br>dimension<br>over<br>500 |
| LQJ-01AT-103 |           | 300       |           | 8.50        |                                                                                                              |
| LQJ-01AT-104 |           | 400       |           | 9.70        |                                                                                                              |
| LQJ-01AT-105 |           | 500       | 3000      | 10.80       |                                                                                                              |
| LQJ-01AT-106 |           | 600       |           | 13.70       |                                                                                                              |
| LQJ-01AT-108 |           | 800       |           | 15.40       |                                                                                                              |
| LQJ-01AT-152 | 150       | 200       | 2000      | 7.70        |                                                                                                              |
| LQJ-01AT-153 |           | 300       |           | 9.80        |                                                                                                              |
| LQJ-01AT-154 |           | 400       |           | 10.70       |                                                                                                              |
| LQJ-01AT-155 |           | 500       | 3000      | 12.00       |                                                                                                              |
| LQJ-01AT-156 |           | 600       |           | 13.90       |                                                                                                              |
| LQJ-01AT-158 |           | 800       |           | 16.40       |                                                                                                              |

XQJ-LQJ-02AT、P、C型铝合金水平弯通桥架  
Type XQJ-LQJ-02AT、P、CAl alloy horizontal bend

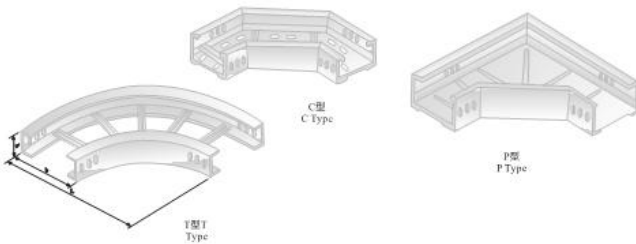

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |
|------------------|-----------|-----------|-----------|-------------------|
| T<br>P<br>C<br>型 | 60        | 200       | 600       | 5.20              |
|                  |           | 300       | 700       | 6.40              |
|                  |           | 400       | 800       | 7.50              |
|                  |           | 500       | 900       | 8.40              |
|                  |           | 600       | 1000      | 10.80             |
|                  |           | 800       | 1200      | 13.90             |
| T<br>P<br>C<br>型 | 100       | 200       | 700       | 6.10              |
|                  |           | 300       | 800       | 7.30              |
|                  |           | 400       | 900       | 8.50              |
|                  |           | 500       | 1000      | 9.60              |
|                  |           | 600       | 1100      | 12.20             |
|                  |           | 800       | 1300      | 16.30             |
| T<br>P<br>C<br>型 | 150       | 200       | 700       | 7.80              |
|                  |           | 300       | 800       | 9.20              |
|                  |           | 400       | 900       | 10.50             |
|                  |           | 500       | 1000      | 11.80             |
|                  |           | 600       | 1100      | 14.30             |
|                  |           | 800       | 1300      | 16.60             |

XQJ-LQJ-03AT、P、C型铝合金水平三通桥架  
Type XQJ-LQJ-03AT、P、CAl alloy horizontal bend

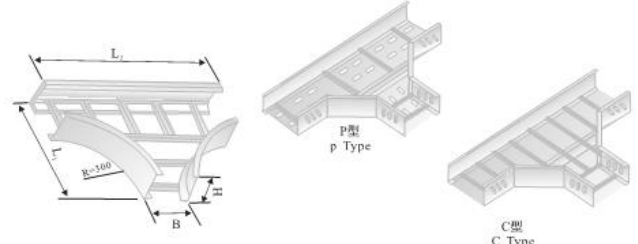


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | L2<br>(mm) | 单件重量 (wkg) weight |
|------------------|-----------|-----------|-----------|------------|-------------------|
| T<br>P<br>C<br>型 | 60        | 200       | 600       | 1000       | 9.80              |
|                  |           | 300       | 700       | 1100       | 11.50             |
|                  |           | 400       | 800       | 1200       | 13.00             |
|                  |           | 500       | 900       | 1300       | 14.90             |
|                  |           | 600       | 1000      | 1400       | 18.00             |
|                  |           | 800       | 1200      | 1600       | 20.10             |
| T<br>P<br>C<br>型 | 100       | 200       | 700       | 1200       | 10.90             |
|                  |           | 300       | 800       | 1300       | 12.70             |
|                  |           | 400       | 900       | 1400       | 14.40             |
|                  |           | 500       | 1000      | 1500       | 16.00             |
|                  |           | 600       | 1100      | 1600       | 19.40             |
|                  |           | 800       | 1300      | 1800       | 22.30             |
| T<br>P<br>C<br>型 | 150       | 200       | 700       | 1200       | 13.90             |
|                  |           | 300       | 800       | 1300       | 15.60             |
|                  |           | 400       | 900       | 1400       | 17.40             |
|                  |           | 500       | 1000      | 1500       | 19.10             |
|                  |           | 600       | 1100      | 1600       | 22.50             |
|                  |           | 800       | 1300      | 1800       | 25.60             |




## XQJ-LQJ 铝合金电缆桥架 XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LQJ-04AT、P、C型铝合金水平四通桥架  
Type XQJ-LQJ-04AT、P、C AL alloy horizontal cross support

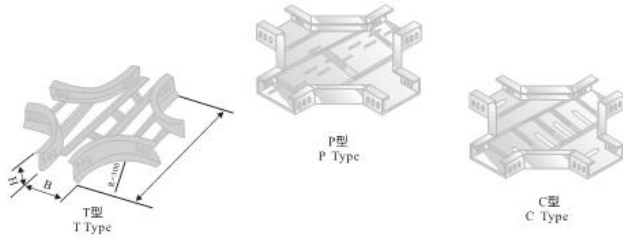


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                                                                              |
|------------------|-----------|-----------|-----------|-------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type            | P、C型Type |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 60        | 200       | 1000      | 13.90             | 11.10    | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极<br><br>Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       | 1100      | 16.20             | 14.80    |                                                                                                                                                                            |
|                  |           | 400       | 1200      | 18.30             | 17.60    |                                                                                                                                                                            |
|                  |           | 500       | 1300      | 20.10             | 20.70    |                                                                                                                                                                            |
|                  |           | 600       | 1400      | 24.30             | 27.30    |                                                                                                                                                                            |
|                  |           | 800       | 1600      | 28.10             | 30.30    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 100       | 200       | 1200      | 15.10             | 12.10    |                                                                                                                                                                            |
|                  |           | 300       | 1300      | 17.30             | 15.70    |                                                                                                                                                                            |
|                  |           | 400       | 1400      | 19.30             | 18.50    |                                                                                                                                                                            |
|                  |           | 500       | 1500      | 21.40             | 21.60    |                                                                                                                                                                            |
|                  |           | 600       | 1600      | 25.50             | 28.30    |                                                                                                                                                                            |
|                  |           | 800       | 1800      | 28.10             | 30.10    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 150       | 200       | 1200      | 19.10             | 16.20    |                                                                                                                                                                            |
|                  |           | 300       | 1300      | 21.20             | 20.40    |                                                                                                                                                                            |
|                  |           | 400       | 1400      | 23.10             | 23.60    |                                                                                                                                                                            |
|                  |           | 500       | 1500      | 25.30             | 27.10    |                                                                                                                                                                            |
|                  |           | 600       | 1600      | 29.40             | 34.50    |                                                                                                                                                                            |
|                  |           | 800       | 1800      | 32.10             | 38.20    |                                                                                                                                                                            |

XQJ-LQJ-05AT、P、C型铝合金垂直下弯通  
Type XQJ-LQJ-05AT、P、C AL alloy vertical downward bend

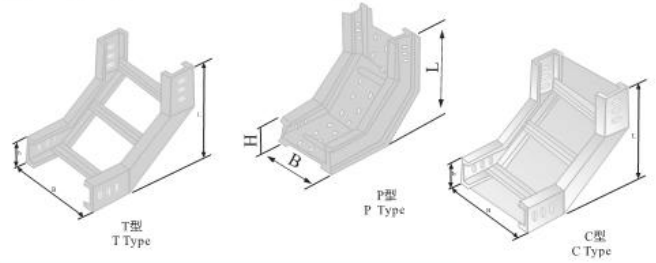


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                                                                              |
|------------------|-----------|-----------|-----------|-------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type            | P、C型Type |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 60        | 200       | 360       | 3.80              | 4.10     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极<br><br>Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       |           | 4.10              | 5.20     |                                                                                                                                                                            |
|                  |           | 400       |           | 5.00              | 6.30     |                                                                                                                                                                            |
|                  |           | 500       |           | 6.20              | 7.60     |                                                                                                                                                                            |
|                  |           | 600       |           | 6.80              | 8.90     |                                                                                                                                                                            |
|                  |           | 800       |           | 7.60              | 10.10    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 100       | 200       | 400       | 4.10              | 4.80     |                                                                                                                                                                            |
|                  |           | 300       |           | 5.00              | 6.10     |                                                                                                                                                                            |
|                  |           | 400       |           | 6.10              | 7.00     |                                                                                                                                                                            |
|                  |           | 500       |           | 6.40              | 8.00     |                                                                                                                                                                            |
|                  |           | 600       |           | 7.00              | 9.80     |                                                                                                                                                                            |
|                  |           | 800       |           | 8.10              | 11.20    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 150       | 200       | 600       | 6.00              | 7.40     |                                                                                                                                                                            |
|                  |           | 300       |           | 6.50              | 9.20     |                                                                                                                                                                            |
|                  |           | 400       |           | 7.10              | 10.40    |                                                                                                                                                                            |
|                  |           | 500       |           | 7.70              | 11.70    |                                                                                                                                                                            |
|                  |           | 600       |           | 8.80              | 14.20    |                                                                                                                                                                            |
|                  |           | 800       |           | 10.10             | 16.40    |                                                                                                                                                                            |

XQJ-LQJ-06AT、P、C型铝合金垂直上弯通  
Type XQJ-LQJ-06AT、P、C AL alloy vertical upward bend

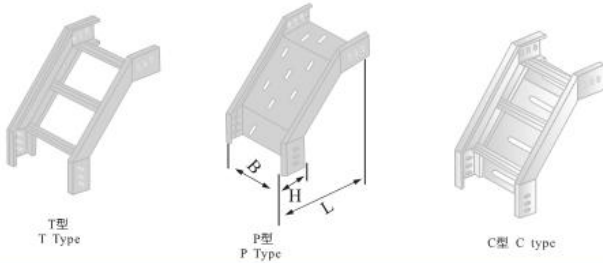

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                                                                              |
|------------------|-----------|-----------|-----------|-------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type            | P、C型Type |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 60        | 200       | 360       | 3.80              | 4.10     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极<br><br>Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       |           | 4.10              | 5.20     |                                                                                                                                                                            |
|                  |           | 400       |           | 5.00              | 6.30     |                                                                                                                                                                            |
|                  |           | 500       |           | 6.20              | 7.60     |                                                                                                                                                                            |
|                  |           | 600       |           | 6.80              | 8.90     |                                                                                                                                                                            |
|                  |           | 800       |           | 7.60              | 10.10    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 100       | 200       | 400       | 4.10              | 4.80     |                                                                                                                                                                            |
|                  |           | 300       |           | 5.00              | 6.10     |                                                                                                                                                                            |
|                  |           | 400       |           | 6.10              | 7.00     |                                                                                                                                                                            |
|                  |           | 500       |           | 6.40              | 8.00     |                                                                                                                                                                            |
|                  |           | 600       |           | 7.00              | 9.80     |                                                                                                                                                                            |
|                  |           | 800       |           | 8.10              | 11.20    |                                                                                                                                                                            |
| T<br>P<br>C<br>型 | 150       | 200       | 600       | 6.00              | 7.40     |                                                                                                                                                                            |
|                  |           | 300       |           | 6.50              | 9.20     |                                                                                                                                                                            |
|                  |           | 400       |           | 7.10              | 10.40    |                                                                                                                                                                            |
|                  |           | 500       |           | 7.70              | 11.70    |                                                                                                                                                                            |
|                  |           | 600       |           | 8.80              | 14.20    |                                                                                                                                                                            |
|                  |           | 800       |           | 10.10             | 16.40    |                                                                                                                                                                            |

XQJ-LQJ-07AT、P、C型铝合金转动弯通  
Type XQJ-LQJ-07AT、P、C AL alloy rotatable bend

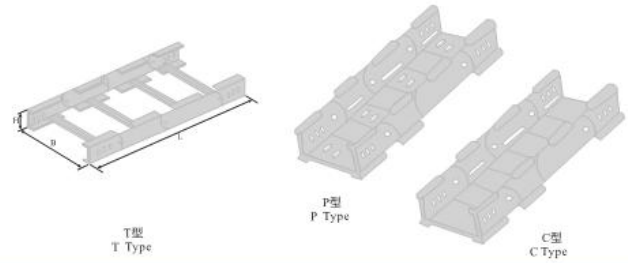


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks |
|------------------|-----------|-----------|-----------|-------------------|----------|---------------|
|                  |           |           |           | T型Type            | P、C型Type |               |
| T<br>P<br>C<br>型 | 60        | 200       | 600       | 5.40              | 6.00     |               |
|                  |           | 300       |           | 6.20              | 7.20     |               |
|                  |           | 400       |           | 6.90              | 8.10     |               |
|                  |           | 500       |           | 7.70              | 9.50     |               |
|                  |           | 600       |           | 9.20              | 11.80    |               |
|                  |           | 800       |           | 11.50             | 14.80    |               |
| T<br>P<br>C<br>型 | 100       | 200       | 800       | 6.70              | 7.20     |               |
|                  |           | 300       |           | 7.40              | 9.20     |               |
|                  |           | 400       |           | 8.20              | 10.20    |               |
|                  |           | 500       |           | 9.00              | 11.70    |               |
|                  |           | 600       |           | 10.50             | 13.80    |               |
|                  |           | 800       |           | 12.10             | 15.40    |               |
| T<br>P<br>C<br>型 | 150       | 200       | 1200      | 9.20              | 11.60    |               |
|                  |           | 300       |           | 10.00             | 13.00    |               |
|                  |           | 400       |           | 10.80             | 13.40    |               |
|                  |           | 500       |           | 11.50             | 15.00    |               |
|                  |           | 600       |           | 13.00             | 16.90    |               |
|                  |           | 800       |           | 15.10             | 16.30    |               |

# XQJ-LQJ 铝合金电缆桥架


## XQJ-Anti-corrosive Al-alloy Support

XQJ-LQJ-01BT型铝合金梯级桥架  
Type XQJ-LQJ-01BTAlalloyladdertype cable support

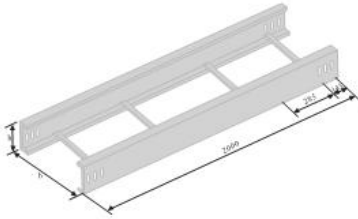


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                             |
|--------------|-----------|-----------|-----------|-------------|-----------------------------------------------------------------------------------------------------------|
| LQJ-01BT-102 | 100       | 200       | 2000      | 5.20        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BT-103 |           | 300       |           | 6.00        |                                                                                                           |
| LQJ-01BT-104 |           | 400       |           | 6.80        |                                                                                                           |
| LQJ-01BT-105 |           | 500       |           | 7.50        |                                                                                                           |
| LQJ-01BT-106 |           | 600       |           | 9.00        |                                                                                                           |
| LQJ-01BT-108 |           | 800       |           | 11.20       |                                                                                                           |
| LQJ-01BT-150 | 150       | 200       | 2000      | 6.80        | Ladd<br>er rein<br>forcing<br>section<br>is provi<br>ded for<br>those B<br>with dimen<br>sion over<br>500 |
| LQJ-01BT-153 |           | 300       |           | 7.50        |                                                                                                           |
| LQJ-01BT-154 |           | 400       |           | 8.20        |                                                                                                           |
| LQJ-01BT-155 |           | 500       |           | 9.00        |                                                                                                           |
| LQJ-01BT-156 |           | 600       |           | 10.60       |                                                                                                           |
| LQJ-01BT-158 |           | 800       |           | 13.10       |                                                                                                           |
| LQJ-01BT-202 | 200       | 200       | 2000      | 9.00        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BT-203 |           | 300       |           | 9.80        |                                                                                                           |
| LQJ-01BT-204 |           | 400       |           | 10.60       |                                                                                                           |
| LQJ-01BT-205 |           | 500       |           | 11.40       |                                                                                                           |
| LQJ-01BT-206 |           | 600       |           | 12.60       |                                                                                                           |
| LQJ-01BT-208 |           | 800       |           | 14.80       |                                                                                                           |

XQJ-LQJ-01BP型铝合金托盘桥架  
Type XQJ-LQJ-01BPAl alloy tray type cable support

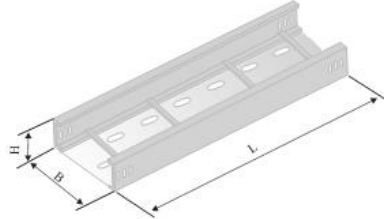


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                             |
|--------------|-----------|-----------|-----------|-------------|-----------------------------------------------------------------------------------------------------------|
| LQJ-01BP-102 | 100       | 200       | 2000      | 6.50        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BP-103 |           | 300       |           | 7.80        |                                                                                                           |
| LQJ-01BP-104 |           | 400       |           | 9.00        |                                                                                                           |
| LQJ-01BP-105 |           | 500       |           | 10.20       |                                                                                                           |
| LQJ-01BP-106 |           | 600       |           | 12.70       |                                                                                                           |
| LQJ-01BP-108 |           | 800       |           | 14.20       |                                                                                                           |
| LQJ-01BP-150 | 150       | 200       | 2000      | 6.70        | Ladd<br>er rein<br>forcing<br>section<br>is provi<br>ded for<br>those B<br>with dimen<br>sion over<br>500 |
| LQJ-01BP-153 |           | 300       |           | 9.50        |                                                                                                           |
| LQJ-01BP-154 |           | 400       |           | 10.70       |                                                                                                           |
| LQJ-01BP-155 |           | 500       |           | 11.90       |                                                                                                           |
| LQJ-01BP-156 |           | 600       |           | 14.30       |                                                                                                           |
| LQJ-01BP-158 |           | 800       |           | 16.70       |                                                                                                           |
| LQJ-01BP-202 | 200       | 200       | 2000      | 8.90        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BP-203 |           | 300       |           | 9.90        |                                                                                                           |
| LQJ-01BP-204 |           | 400       |           | 12.70       |                                                                                                           |
| LQJ-01BP-205 |           | 500       |           | 14.10       |                                                                                                           |
| LQJ-01BP-206 |           | 600       |           | 16.50       |                                                                                                           |
| LQJ-01BP-208 |           | 800       |           | 18.60       |                                                                                                           |

XQJ-LQJ-01BC型铝合金槽式桥架  
Type XQJ-LQJ-01BCAl alloy channel type cable support

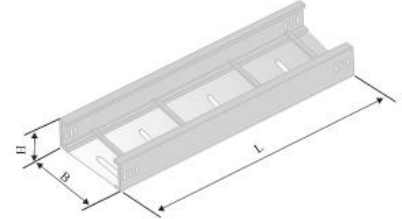


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                             |
|--------------|-----------|-----------|-----------|-------------|-----------------------------------------------------------------------------------------------------------|
| LQJ-01BC-102 | 100       | 200       | 2000      | 6.50        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BC-103 |           | 300       |           | 7.80        |                                                                                                           |
| LQJ-01BC-104 |           | 400       |           | 9.00        |                                                                                                           |
| LQJ-01BC-105 |           | 500       |           | 10.20       |                                                                                                           |
| LQJ-01BC-106 |           | 600       |           | 12.70       |                                                                                                           |
| LQJ-01BC-108 |           | 800       |           | 14.40       |                                                                                                           |
| LQJ-01BC-152 | 150       | 200       | 2000      | 7.80        | Ladd<br>er rein<br>forcing<br>section<br>is provi<br>ded for<br>those B<br>with dimen<br>sion over<br>500 |
| LQJ-01BC-153 |           | 300       |           | 9.50        |                                                                                                           |
| LQJ-01BC-154 |           | 400       |           | 10.70       |                                                                                                           |
| LQJ-01BC-155 |           | 500       |           | 11.90       |                                                                                                           |
| LQJ-01BC-156 |           | 600       |           | 14.40       |                                                                                                           |
| LQJ-01BC-158 |           | 800       |           | 16.50       |                                                                                                           |
| LQJ-01BC-202 | 200       | 200       | 2000      | 9.90        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                     |
| LQJ-01BC-203 |           | 300       |           | 11.70       |                                                                                                           |
| LQJ-01BC-204 |           | 400       |           | 12.90       |                                                                                                           |
| LQJ-01BC-205 |           | 500       |           | 14.10       |                                                                                                           |
| LQJ-01BC-206 |           | 600       |           | 16.50       |                                                                                                           |
| LQJ-01BC-208 |           | 800       |           | 18.20       |                                                                                                           |

XQJ-LQJ-02BT、P、C型铝合金水平弯通桥架  
XQJ-LQJ-02BT、P、CAl alloy horizontal bend support

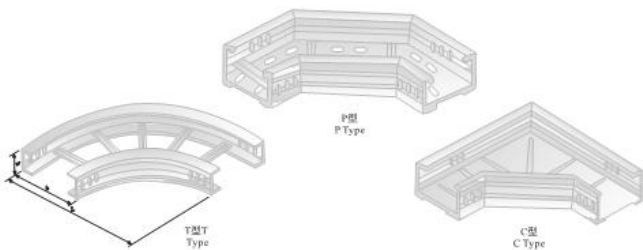

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |        |        |
|------------------|-----------|-----------|-----------|-------------------|--------|--------|
|                  |           |           |           | T型Type            | P型Type | C型Type |
| T<br>P<br>C<br>型 | 100       | 200       | 600       | 4.90              | 5.80   | 6.80   |
|                  |           | 300       | 700       | 5.90              | 8.60   | 10.00  |
|                  |           | 400       | 800       | 6.90              | 11.10  | 13.00  |
|                  |           | 500       | 900       | 7.90              | 14.20  | 16.50  |
|                  |           | 600       | 1000      | 9.90              | 20.90  | 23.80  |
|                  |           | 800       | 1200      | 10.90             | 23.20  | 26.10  |
| T<br>P<br>C<br>型 | 150       | 200       | 700       | 7.80              | 8.40   | 9.80   |
|                  |           | 300       | 800       | 8.50              | 11.60  | 13.50  |
|                  |           | 400       | 900       | 9.60              | 14.60  | 16.80  |
|                  |           | 500       | 1000      | 10.70             | 17.90  | 20.30  |
|                  |           | 600       | 1100      | 13.00             | 25.50  | 28.50  |
|                  |           | 800       | 1300      | 14.80             | 28.10  | 31.40  |
| T<br>P<br>C<br>型 | 200       | 200       | 700       | 9.80              | 10.50  | 11.80  |
|                  |           | 300       | 800       | 11.10             | 13.90  | 15.40  |
|                  |           | 400       | 900       | 12.40             | 17.00  | 19.10  |
|                  |           | 500       | 1000      | 13.70             | 20.50  | 23.00  |
|                  |           | 600       | 1100      | 16.10             | 28.50  | 31.90  |
|                  |           | 800       | 1300      | 18.40             | 31.10  | 35.40  |

XQJ-LQJ-03BT、P、C型铝合金水平三通桥架  
XQJ-LQJ-03BT、P、CAl alloy horizontal tee cable support

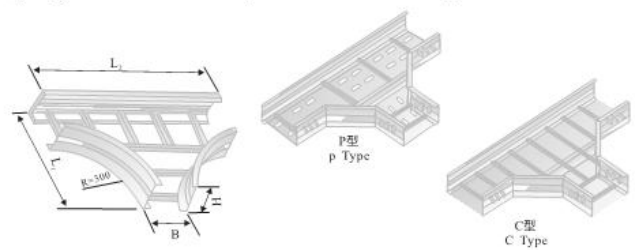


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | L2<br>(mm) | 单件重量 (wkg) weight |          |
|------------------|-----------|-----------|-----------|------------|-------------------|----------|
|                  |           |           |           |            | T型Type            | P.C型Type |
| T<br>P<br>C<br>型 | 100       | 200       | 600       | 1000       | 9.20              | 8.5      |
|                  |           | 300       | 700       | 1100       | 11.20             | 11.50    |
|                  |           | 400       | 800       | 1200       | 12.70             | 14.00    |
|                  |           | 500       | 900       | 1300       | 14.20             | 16.00    |
|                  |           | 600       | 1000      | 1400       | 17.10             | 22.60    |
|                  |           | 800       | 1200      | 1600       | 19.80             | 25.40    |
| T<br>P<br>C<br>型 | 150       | 200       | 700       | 1200       | 13.50             | 12.40    |
|                  |           | 300       | 800       | 1300       | 15.10             | 16.00    |
|                  |           | 400       | 900       | 1400       | 16.60             | 18.80    |
|                  |           | 500       | 1000      | 1500       | 18.20             | 21.80    |
|                  |           | 600       | 1100      | 1600       | 21.30             | 28.60    |
|                  |           | 800       | 1300      | 1800       | 24.20             | 31.10    |
| T<br>P<br>C<br>型 | 200       | 200       | 700       | 1200       | 16.80             | 15.10    |
|                  |           | 300       | 800       | 1300       | 18.50             | 18.80    |
|                  |           | 400       | 900       | 1400       | 20.10             | 21.70    |
|                  |           | 500       | 1000      | 1500       | 21.80             | 24.90    |
|                  |           | 600       | 1100      | 1600       | 25.20             | 31.80    |
|                  |           | 800       | 1300      | 1800       | 28.10             | 34.10    |






## XQJ-LQJ 铝合金电缆桥架 XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LQJ-04BT、P、C型铝合金水平四通桥架  
Type XQJ-LQJ-04BT、P、C AL alloy horizontal cross cable support

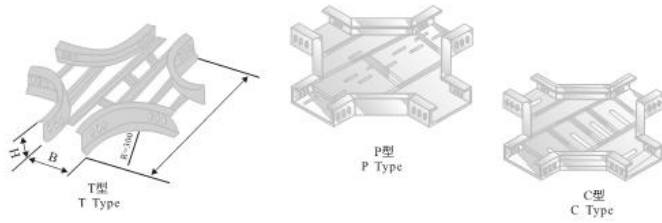


|                  | 型号<br>Model | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                         |
|------------------|-------------|-----------|-----------|-----------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |             |           |           |           | T型Type            | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-04B-102 | 100       | 200       | 1000      | 13.85             | 11.45    | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  | LQJ-04B-103 |           | 300       | 1100      | 15.80             | 15.00    |                                                                                                                       |
|                  | LQJ-04B-104 |           | 400       | 1200      | 17.70             | 17.90    |                                                                                                                       |
|                  | LQJ-04B-105 |           | 500       | 1300      | 19.60             | 20.85    |                                                                                                                       |
|                  | LQJ-04B-106 |           | 600       | 1400      | 23.45             | 27.60    |                                                                                                                       |
|                  | LQJ-04B-108 |           | 800       | 1600      | 28.20             | 37.40    |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-04B-152 | 150       | 200       | 1200      | 18.70             | 16.10    | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  | LQJ-04B-153 |           | 300       | 1300      | 20.60             | 20.40    |                                                                                                                       |
|                  | LQJ-04B-154 |           | 400       | 1400      | 22.50             | 23.70    |                                                                                                                       |
|                  | LQJ-04B-155 |           | 500       | 1500      | 23.70             | 27.10    |                                                                                                                       |
|                  | LQJ-04B-156 |           | 600       | 1600      | 28.30             | 34.55    |                                                                                                                       |
|                  | LQJ-04B-158 |           | 800       | 1800      | 32.10             | 40.60    |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-04B-202 | 200       | 200       | 1200      | 22.45             | 19.15    |                                                                                                                       |
|                  | LQJ-04B-203 |           | 300       | 1300      | 24.40             | 23.40    |                                                                                                                       |
|                  | LQJ-04B-204 |           | 400       | 1400      | 26.30             | 26.65    |                                                                                                                       |
|                  | LQJ-04B-205 |           | 500       | 1500      | 28.20             | 30.10    |                                                                                                                       |
|                  | LQJ-04B-206 |           | 600       | 1600      | 32.10             | 37.60    |                                                                                                                       |
|                  | LQJ-04B-208 |           | 800       | 1800      | 35.50             | 45.12    |                                                                                                                       |

XQJ-LQJ-05BT、P、C型铝合金垂直下弯通  
Type XQJ-LQJ-05BT、P、C AL alloy vertical downward bend

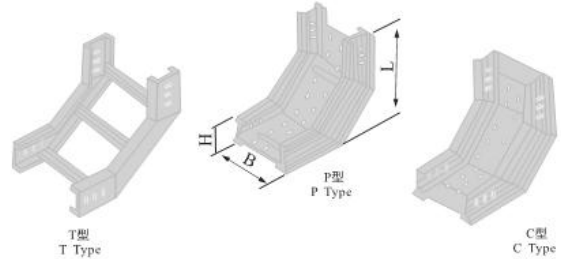


|                  | 型号<br>Model | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                         |
|------------------|-------------|-----------|-----------|-----------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |             |           |           |           | T型Type            | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-05B-102 | 100       | 200       | 400       | 3.60              | 4.35     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  | LQJ-05B-103 |           | 300       |           | 4.20              | 5.60     |                                                                                                                       |
|                  | LQJ-05B-104 |           | 400       |           | 4.80              | 6.60     |                                                                                                                       |
|                  | LQJ-05B-105 |           | 500       |           | 5.30              | 7.55     |                                                                                                                       |
|                  | LQJ-05B-106 |           | 600       |           | 6.50              | 9.40     |                                                                                                                       |
|                  | LQJ-05B-108 |           | 800       |           | 7.80              | 11.00    |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-05B-152 | 150       | 200       | 600       | 6.00              | 7.50     | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  | LQJ-05B-153 |           | 300       |           | 6.55              | 9.10     |                                                                                                                       |
|                  | LQJ-05B-154 |           | 400       |           | 7.10              | 10.50    |                                                                                                                       |
|                  | LQJ-05B-155 |           | 500       |           | 7.70              | 11.70    |                                                                                                                       |
|                  | LQJ-05B-156 |           | 600       |           | 8.85              | 14.10    |                                                                                                                       |
|                  | LQJ-05B-158 |           | 800       |           | 10.00             | 17.40    |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-05B-202 | 200       | 200       | 800       | 8.60              | 10.25    |                                                                                                                       |
|                  | LQJ-05B-203 |           | 300       |           | 9.10              | 12.10    |                                                                                                                       |
|                  | LQJ-05B-204 |           | 400       |           | 9.70              | 13.40    |                                                                                                                       |
|                  | LQJ-05B-205 |           | 500       |           | 10.30             | 14.70    |                                                                                                                       |
|                  | LQJ-05B-206 |           | 600       |           | 11.50             | 17.35    |                                                                                                                       |
|                  | LQJ-05B-208 |           | 800       |           | 12.75             | 21.05    |                                                                                                                       |

XQJ-LQJ-06BT、P、C型铝合金垂直上弯通  
Type XQJ-LQJ-06BT、P、C AL alloy vertical upward bend

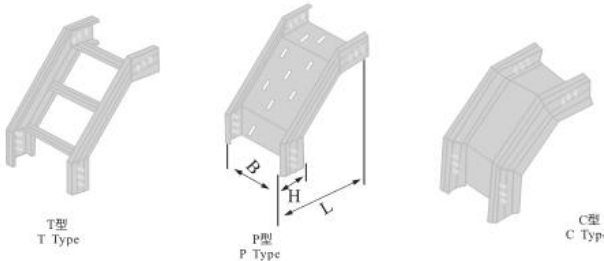

|                  | 型号<br>Model | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                         |
|------------------|-------------|-----------|-----------|-----------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |             |           |           |           | T型Type            | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-06B-62  | 100       | 200       | 400       | 3.60              | 3.95     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  | LQJ-06B-63  |           | 300       |           | 4.15              | 4.95     |                                                                                                                       |
|                  | LQJ-06B-64  |           | 400       |           | 4.80              | 5.80     |                                                                                                                       |
|                  | LQJ-06B-65  |           | 500       |           | 5.30              | 6.50     |                                                                                                                       |
|                  | LQJ-06B-66  |           | 600       |           | 6.50              | 8.10     |                                                                                                                       |
|                  | LQJ-06B-68  |           | 800       |           | 7.60              | 9.80     |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-06B-102 | 150       | 200       | 600       | 6.00              | 6.90     | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  | LQJ-06B-103 |           | 300       |           | 6.55              | 8.15     |                                                                                                                       |
|                  | LQJ-06B-104 |           | 400       |           | 7.10              | 9.10     |                                                                                                                       |
|                  | LQJ-06B-105 |           | 500       |           | 7.70              | 10.10    |                                                                                                                       |
|                  | LQJ-06B-106 |           | 600       |           | 8.85              | 12.05    |                                                                                                                       |
|                  | LQJ-06B-108 |           | 800       |           | 9.90              | 14.10    |                                                                                                                       |
| T<br>P<br>C<br>型 | LQJ-06B-152 | 200       | 200       | 650       | 8.55              | 9.10     |                                                                                                                       |
|                  | LQJ-06B-153 |           | 300       |           | 9.10              | 10.70    |                                                                                                                       |
|                  | LQJ-06B-154 |           | 400       |           | 9.70              | 11.70    |                                                                                                                       |
|                  | LQJ-06B-155 |           | 500       |           | 10.30             | 12.70    |                                                                                                                       |
|                  | LQJ-06B-156 |           | 600       |           | 11.45             | 14.70    |                                                                                                                       |
|                  | LQJ-06B-158 |           | 800       |           | 12.80             | 16.80    |                                                                                                                       |

XQJ-LQJ-07BT、P、C型铝合金转动弯通  
Type XQJ-LQJ-07BT、P、C AL alloy rotatable bend

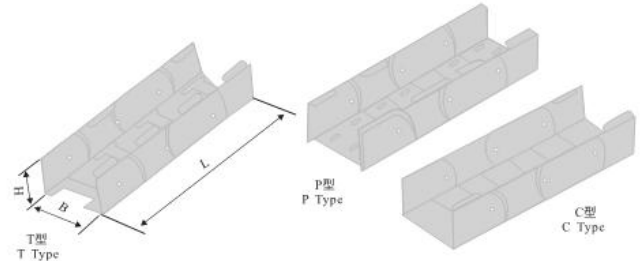


|                  | 型号<br>Model | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks |
|------------------|-------------|-----------|-----------|-----------|-------------------|----------|---------------|
|                  |             |           |           |           | T型Type            | P、C型Type |               |
| T<br>P<br>C<br>型 | LQJ-07B-62  | 100       | 200       | 600       | 5.75              | 7.10     |               |
|                  | LQJ-07B-63  |           | 300       |           | 6.60              | 8.00     |               |
|                  | LQJ-07B-64  |           | 400       |           | 7.30              | 9.10     |               |
|                  | LQJ-07B-65  |           | 500       |           | 8.10              | 10.15    |               |
|                  | LQJ-07B-66  |           | 600       |           | 9.60              | 12.00    |               |
|                  | LQJ-07B-68  |           | 800       |           | 11.20             | 13.40    |               |
| T<br>P<br>C<br>型 | LQJ-07B-102 | 150       | 200       | 800       | 9.15              | 10.55    |               |
|                  | LQJ-07B-103 |           | 300       |           | 10.00             | 11.40    |               |
|                  | LQJ-07B-104 |           | 400       |           | 10.70             | 13.00    |               |
|                  | LQJ-07B-105 |           | 500       |           | 11.45             | 14.20    |               |
|                  | LQJ-07B-106 |           | 600       |           | 13.00             | 16.00    |               |
|                  | LQJ-07B-108 |           | 800       |           | 14.50             | 18.10    |               |
| T<br>P<br>C<br>型 | LQJ-07B-152 | 200       | 200       | 1200      | 13.00             | 14.60    |               |
|                  | LQJ-07B-153 |           | 300       |           | 13.85             | 15.70    |               |
|                  | LQJ-07B-154 |           | 400       |           | 14.10             | 17.10    |               |
|                  | LQJ-07B-155 |           | 500       |           | 15.10             | 18.85    |               |
|                  | LQJ-07B-156 |           | 600       |           | 16.00             | 20.00    |               |
|                  | LQJ-07B-158 |           | 800       |           | 17.10             | 22.05    |               |

# XQJ-LQJ 铝合金电缆桥架


## XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LQJ-01CT型铝合金梯级桥架  
Type XQJ-LQJ-01CT Al alloy ladder type cable support




| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                |
|--------------|-----------|-----------|-----------|-------------|----------------------------------------------------------------------------------------------|
| LQJ-01CT-102 | 112       | 200       | 2000      | 5.60        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                        |
| LQJ-01CT-103 |           | 300       |           | 6.40        |                                                                                              |
| LQJ-01CT-104 |           | 400       |           | 7.20        |                                                                                              |
| LQJ-01CT-105 |           | 500       | 3000      | 8.00        |                                                                                              |
| LQJ-01CT-106 |           | 600       |           | 9.50        |                                                                                              |
| LQJ-01CT-108 |           | 800       |           | 11.00       |                                                                                              |
| LQJ-01CT-150 | 162       | 200       | 2000      | 7.10        | Ladder<br>reinforcing<br>section is<br>provided for<br>those B<br>with dimension<br>over 500 |
| LQJ-01CT-153 |           | 300       |           | 7.90        |                                                                                              |
| LQJ-01CT-154 |           | 400       |           | 8.65        |                                                                                              |
| LQJ-01CT-155 |           | 500       | 3000      | 9.40        |                                                                                              |
| LQJ-01CT-156 |           | 600       |           | 11.00       |                                                                                              |
| LQJ-01CT-158 |           | 800       |           | 12.60       |                                                                                              |
| LQJ-01CT-202 | 212       | 200       | 2000      | 9.30        |                                                                                              |
| LQJ-01CT-203 |           | 300       |           | 10.05       |                                                                                              |
| LQJ-01CT-204 |           | 400       |           | 11.00       |                                                                                              |
| LQJ-01CT-205 |           | 500       | 3000      | 11.60       |                                                                                              |
| LQJ-01CT-206 |           | 600       |           | 13.00       |                                                                                              |
| LQJ-01CT-208 |           | 800       |           | 15.40       |                                                                                              |

XQJ-LQJ-01CP型铝合金托盘桥架  
Type XQJ-LQJ-01CP Al alloy tray type cable support

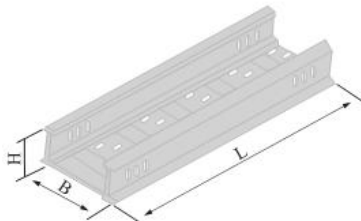


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                |
|--------------|-----------|-----------|-----------|-------------|----------------------------------------------------------------------------------------------|
| LQJ-01CP-102 | 112       | 200       | 2000      | 6.59        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                        |
| LQJ-01CP-103 |           | 300       |           | 8.75        |                                                                                              |
| LQJ-01CP-104 |           | 400       |           | 10.00       |                                                                                              |
| LQJ-01CP-105 |           | 500       | 3000      | 11.20       |                                                                                              |
| LQJ-01CP-106 |           | 600       |           | 13.70       |                                                                                              |
| LQJ-01CP-108 |           | 800       |           | 16.20       |                                                                                              |
| LQJ-01CP-150 | 162       | 200       | 2000      | 8.40        | Ladder<br>reinforcing<br>section is<br>provided for<br>those B<br>with dimension<br>over 500 |
| LQJ-01CP-153 |           | 300       |           | 10.20       |                                                                                              |
| LQJ-01CP-154 |           | 400       |           | 11.40       |                                                                                              |
| LQJ-01CP-155 |           | 500       | 3000      | 12.65       |                                                                                              |
| LQJ-01CP-156 |           | 600       |           | 15.10       |                                                                                              |
| LQJ-01CP-158 |           | 800       |           | 17.60       |                                                                                              |
| LQJ-01CP-202 | 212       | 200       | 2000      | 10.50       |                                                                                              |
| LQJ-01CP-203 |           | 300       |           | 12.40       |                                                                                              |
| LQJ-01CP-204 |           | 400       |           | 13.60       |                                                                                              |
| LQJ-01CP-205 |           | 500       | 3000      | 14.80       |                                                                                              |
| LQJ-01CP-206 |           | 600       |           | 17.25       |                                                                                              |
| LQJ-01CP-208 |           | 800       |           | 19.60       |                                                                                              |

XQJ-LQJ-01CC型铝合金槽式桥架  
Type XQJ-LQJ-01CC Al alloy channel type cable support

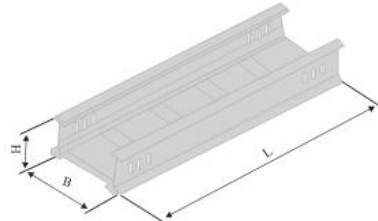


| 型号<br>Model  | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单重<br>wkg/m | 备注<br>Remarks                                                                                |
|--------------|-----------|-----------|-----------|-------------|----------------------------------------------------------------------------------------------|
| LQJ-01CC-102 | 112       | 200       | 2000      | 5.85        | B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                        |
| LQJ-01CC-103 |           | 300       |           | 7.00        |                                                                                              |
| LQJ-01CC-104 |           | 400       |           | 8.80        |                                                                                              |
| LQJ-01CC-105 |           | 500       | 3000      | 11.20       |                                                                                              |
| LQJ-01CC-106 |           | 600       |           | 13.65       |                                                                                              |
| LQJ-01CC-108 |           | 800       |           | 16.05       |                                                                                              |
| LQJ-01CC-152 | 162       | 200       | 2000      | 8.40        | Ladder<br>reinforcing<br>section is<br>provided for<br>those B<br>with dimension<br>over 500 |
| LQJ-01CC-153 |           | 300       |           | 10.20       |                                                                                              |
| LQJ-01CC-154 |           | 400       |           | 11.40       |                                                                                              |
| LQJ-01CC-155 |           | 500       | 3000      | 12.60       |                                                                                              |
| LQJ-01CC-156 |           | 600       |           | 15.10       |                                                                                              |
| LQJ-01CC-158 |           | 800       |           | 17.60       |                                                                                              |
| LQJ-01CC-202 | 212       | 200       | 2000      | 10.50       |                                                                                              |
| LQJ-01CC-203 |           | 300       |           | 12.40       |                                                                                              |
| LQJ-01CC-204 |           | 400       |           | 13.60       |                                                                                              |
| LQJ-01CC-205 |           | 500       | 3000      | 14.80       |                                                                                              |
| LQJ-01CC-206 |           | 600       |           | 17.25       |                                                                                              |
| LQJ-01CC-208 |           | 800       |           | 21.00       |                                                                                              |

XQJ-LQJ-02CT、P、C型铝合金水平弯通桥架  
Type XQJ-LQJ-02CT、P、C Al alloy horizontal bend cable support

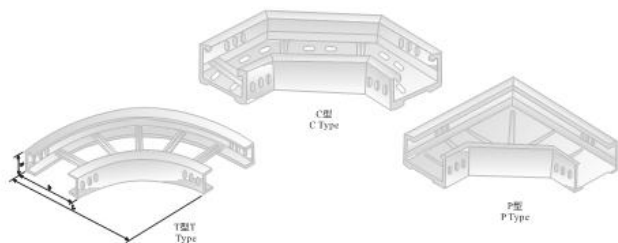

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |        |        |
|------------------|-----------|-----------|-----------|-------------------|--------|--------|
|                  |           |           |           | T型Type            | P型Type | C型Type |
| T<br>P<br>C<br>型 | 112       | 200       | 600       | 5.30              | 6.70   | 7.79   |
|                  |           | 300       | 700       | 6.25              | 9.80   | 11.00  |
|                  |           | 400       | 800       | 7.40              | 12.50  | 14.00  |
|                  |           | 500       | 900       | 8.45              | 15.00  | 17.50  |
|                  |           | 600       | 1000      | 12.50             | 22.70  | 24.90  |
|                  |           | 800       | 1200      | 12.70             | 28.40  | 31.25  |
| T<br>P<br>C<br>型 | 162       | 200       | 700       | 7.60              | 9.45   | 10.75  |
|                  |           | 300       | 800       | 8.75              | 13.00  | 14.60  |
|                  |           | 400       | 900       | 9.90              | 16.00  | 17.20  |
|                  |           | 500       | 1000      | 11.05             | 19.40  | 21.50  |
|                  |           | 600       | 1100      | 13.35             | 27.20  | 30.20  |
|                  |           | 800       | 1300      | 16.00             | 35.40  | 39.10  |
| T<br>P<br>C<br>型 | 212       | 200       | 700       | 10.00             | 11.50  | 13.00  |
|                  |           | 300       | 800       | 11.30             | 15.20  | 17.20  |
|                  |           | 400       | 900       | 12.60             | 18.40  | 20.90  |
|                  |           | 500       | 1000      | 13.90             | 22.50  | 25.50  |
|                  |           | 600       | 1100      | 16.60             | 30.10  | 33.70  |
|                  |           | 800       | 1300      | 19.80             | 37.60  | 41.90  |

XQJ-LQJ-03CT、P、C型铝合金水平三通  
Type XQJ-LQJ-03CT、P、C Al alloy horizontal tee cable support

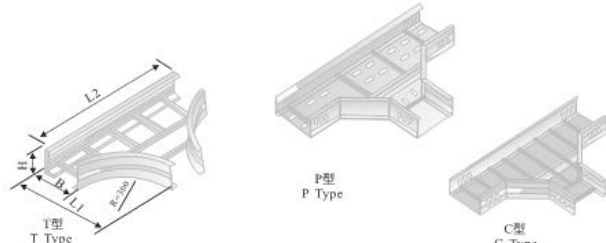


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | L2<br>(mm) | 单件重量 (wkg) weight |        |        |
|------------------|-----------|-----------|-----------|------------|-------------------|--------|--------|
|                  |           |           |           |            | T型Type            | P型Type | C型Type |
| T<br>P<br>C<br>型 | 112       | 200       | 600       | 1000       | 10.25             | 10.75  |        |
|                  |           | 300       | 700       | 1100       | 11.75             | 12.80  |        |
|                  |           | 400       | 800       | 1200       | 13.30             | 15.00  |        |
|                  |           | 500       | 900       | 1300       | 14.80             | 17.80  |        |
|                  |           | 600       | 1000      | 1400       | 17.80             | 23.80  |        |
|                  |           | 800       | 1200      | 1600       | 20.10             | 29.20  |        |
| T<br>P<br>C<br>型 | 162       | 200       | 700       | 1200       | 13.80             | 13.20  |        |
|                  |           | 300       | 800       | 1300       | 15.40             | 16.90  |        |
|                  |           | 400       | 900       | 1400       | 17.00             | 19.80  |        |
|                  |           | 500       | 1000      | 1500       | 18.60             | 22.90  |        |
|                  |           | 600       | 1100      | 1600       | 21.75             | 29.70  |        |
|                  |           | 800       | 1300      | 1800       | 24.80             | 35.40  |        |
| T<br>P<br>C<br>型 | 212       | 200       | 700       | 1200       | 15.10             | 16.00  |        |
|                  |           | 300       | 800       | 1300       | 17.11             | 19.70  |        |
|                  |           | 400       | 900       | 1400       | 19.50             | 22.80  |        |
|                  |           | 500       | 1000      | 1500       | 22.20             | 25.90  |        |
|                  |           | 600       | 1100      | 1600       | 25.60             | 33.00  |        |
|                  |           | 800       | 1300      | 1800       | 29.00             | 40.10  |        |






## XQJ-LQJ 铝合金电缆桥架 XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LQJ-04CT、P、C型铝合金水平四通桥架  
Type XQJ-LQJ-04CT、P、C AL alloy horizontal cross cable support

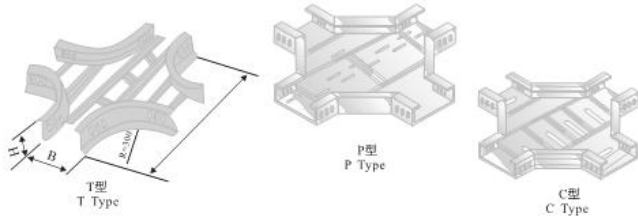


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) weight |          | 备注<br>Remarks                                                                                                         |
|------------------|-----------|-----------|-----------|-------------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type            | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | 112       | 200       | 1000      | 14.50             | 18.70    | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  |           | 300       | 1100      | 16.40             | 21.80    |                                                                                                                       |
|                  |           | 400       | 1200      | 18.30             | 28.40    |                                                                                                                       |
|                  |           | 500       | 1300      | 20.25             | 31.60    |                                                                                                                       |
|                  |           | 600       | 1400      | 24.10             | 34.20    |                                                                                                                       |
|                  |           | 800       | 1600      | 27.25             | 36.90    |                                                                                                                       |
| T<br>P<br>C<br>型 | 162       | 200       | 1200      | 17.20             | 21.20    | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       | 1300      | 21.10             | 24.40    |                                                                                                                       |
|                  |           | 400       | 1400      | 23.00             | 27.90    |                                                                                                                       |
|                  |           | 500       | 1500      | 24.90             | 35.40    |                                                                                                                       |
|                  |           | 600       | 1600      | 28.80             | 39.10    |                                                                                                                       |
|                  |           | 800       | 1800      | 32.90             | 43.75    |                                                                                                                       |
| T<br>P<br>C<br>型 | 212       | 200       | 1200      | 22.90             | 24.40    |                                                                                                                       |
|                  |           | 300       | 1300      | 24.80             | 27.90    |                                                                                                                       |
|                  |           | 400       | 1400      | 26.70             | 35.40    |                                                                                                                       |
|                  |           | 500       | 1500      | 28.65             | 39.10    |                                                                                                                       |
|                  |           | 600       | 1600      | 32.50             | 42.75    |                                                                                                                       |
|                  |           | 800       | 1800      | 36.90             | 48.40    |                                                                                                                       |

XQJ-LQJ-06CT、P、C型铝合金垂直上弯通  
Type XQJ-LQJ-06CT、P、C AL alloy vertical upward bend

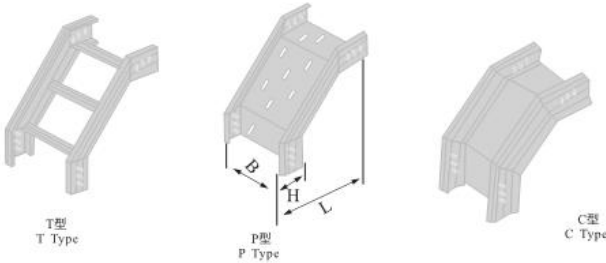


| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) |          | 备注<br>Remarks                                                                                                         |
|------------------|-----------|-----------|-----------|------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type     | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | 112       | 200       | 400       | 3.95       | 4.65     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  |           | 300       |           | 4.55       | 5.75     |                                                                                                                       |
|                  |           | 400       |           | 5.15       | 6.55     |                                                                                                                       |
|                  |           | 500       |           | 5.70       | 7.30     |                                                                                                                       |
|                  |           | 600       |           | 6.85       | 8.85     |                                                                                                                       |
|                  |           | 800       |           | 7.50       | 10.20    |                                                                                                                       |
| T<br>P<br>C<br>型 | 162       | 200       | 600       | 6.30       | 7.30     | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       |           | 6.80       | 9.10     |                                                                                                                       |
|                  |           | 400       |           | 7.45       | 10.00    |                                                                                                                       |
|                  |           | 500       |           | 8.05       | 11.00    |                                                                                                                       |
|                  |           | 600       |           | 9.15       | 13.00    |                                                                                                                       |
|                  |           | 800       |           | 10.20      | 15.20    |                                                                                                                       |
| T<br>P<br>C<br>型 | 212       | 200       | 650       | 8.95       | 10.30    |                                                                                                                       |
|                  |           | 300       |           | 9.50       | 11.78    |                                                                                                                       |
|                  |           | 400       |           | 10.10      | 12.70    |                                                                                                                       |
|                  |           | 500       |           | 10.65      | 13.65    |                                                                                                                       |
|                  |           | 600       |           | 11.80      | 15.65    |                                                                                                                       |
|                  |           | 800       |           | 12.95      | 18.40    |                                                                                                                       |

XQJ-LQJ-05CT、P、C型铝合金垂直下弯通  
Type XQJ-LQJ-05CT、P、C AL alloy horizontal cross cable support

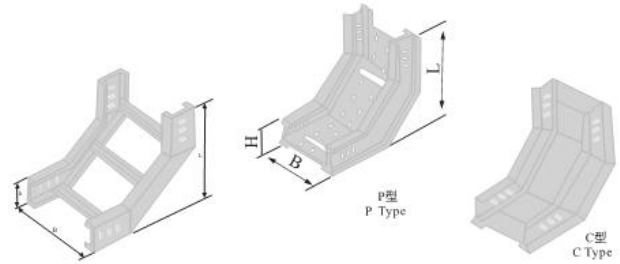

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) |          | 备注<br>Remarks                                                                                                         |
|------------------|-----------|-----------|-----------|------------|----------|-----------------------------------------------------------------------------------------------------------------------|
|                  |           |           |           | T型Type     | P、C型Type |                                                                                                                       |
| T<br>P<br>C<br>型 | 112       | 200       | 412       | 3.95       | 5.10     | P、C型<br>B尺寸<br>在500<br>以上的<br>加用梯<br>级加强<br>极                                                                         |
|                  |           | 300       |           | 4.55       | 6.50     |                                                                                                                       |
|                  |           | 400       |           | 5.15       | 7.45     |                                                                                                                       |
|                  |           | 500       |           | 5.70       | 8.45     |                                                                                                                       |
|                  |           | 600       |           | 6.85       | 10.35    |                                                                                                                       |
|                  |           | 800       |           | 7.50       | 13.00    |                                                                                                                       |
| T<br>P<br>C<br>型 | 150       | 200       | 612       | 6.30       | 8.25     | Ladd<br>rein<br>forcing<br>section<br>is<br>provi<br>ded<br>for<br>those<br>B<br>with<br>dimen<br>sion<br>over<br>500 |
|                  |           | 300       |           | 6.80       | 10.10    |                                                                                                                       |
|                  |           | 400       |           | 7.45       | 11.35    |                                                                                                                       |
|                  |           | 500       |           | 8.05       | 12.55    |                                                                                                                       |
|                  |           | 600       |           | 9.15       | 15.10    |                                                                                                                       |
|                  |           | 800       |           | 10.20      | 17.20    |                                                                                                                       |
| T<br>P<br>C<br>型 | 200       | 200       | 662       | 8.95       | 10.10    |                                                                                                                       |
|                  |           | 300       |           | 10.10      | 13.15    |                                                                                                                       |
|                  |           | 400       |           | 10.80      | 14.50    |                                                                                                                       |
|                  |           | 500       |           | 11.95      | 15.85    |                                                                                                                       |
|                  |           | 600       |           | 12.95      | 18.50    |                                                                                                                       |
|                  |           | 800       |           | 14.10      | 21.40    |                                                                                                                       |

XQJ-LQJ-07CT、P、C型铝合金转动弯通  
Type XQJ-LQJ-07CT、P、C AL alloy rotatable bend

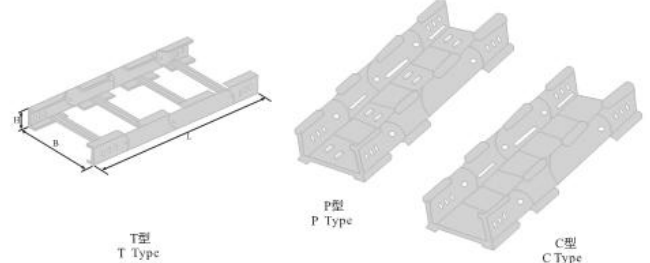

| 型号<br>Model      | H<br>(mm) | B<br>(mm) | L<br>(mm) | 单件重量 (wkg) |          | 备注<br>Remarks |
|------------------|-----------|-----------|-----------|------------|----------|---------------|
|                  |           |           |           | T型Type     | P、C型Type |               |
| T<br>P<br>C<br>型 | 112       | 200       | 600       | 6.15       | 7.20     |               |
|                  |           | 300       |           | 6.90       | 8.20     |               |
|                  |           | 400       |           | 7.70       | 9.10     |               |
|                  |           | 500       |           | 8.45       | 10.85    |               |
|                  |           | 600       |           | 10.00      | 11.30    |               |
|                  |           | 800       |           | 12.10      | 14.20    |               |
| T<br>P<br>C<br>型 | 162       | 200       | 800       | 9.50       | 10.45    |               |
|                  |           | 300       |           | 10.30      | 11.80    |               |
|                  |           | 400       |           | 11.40      | 12.90    |               |
|                  |           | 500       |           | 11.90      | 13.60    |               |
|                  |           | 600       |           | 13.40      | 15.25    |               |
|                  |           | 800       |           | 15.35      | 17.15    |               |
| T<br>P<br>C<br>型 | 212       | 200       | 1200      | 13.80      | 15.30    |               |
|                  |           | 300       |           | 14.60      | 16.95    |               |
|                  |           | 400       |           | 15.40      | 17.95    |               |
|                  |           | 500       |           | 16.10      | 18.40    |               |
|                  |           | 600       |           | 17.65      | 20.15    |               |
|                  |           | 800       |           | 19.20      | 22.10    |               |

# XQJ-LQJ 铝合金电缆桥架


## XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LPC-01A 型铝合金配线槽  
Type XQJ-LPC-01A Al alloy cable duct




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | 重量<br>w(kg) | 备注<br>Remarks |
|------------|-----------|-----------|-------------|---------------|
| LPC-01A-1  | 50        | 25        | 4.30        |               |
| LPC-01A-2  | 80        | 40        | 5.10        |               |
| LPC-01A-3  | 100       | 50        | 6.10        |               |
| LPC-01A-4  | 120       | 60        | 7.25        |               |
| LPC-01A-5  | 150       | 75        | 9.15        |               |
| LPC-01A-6  | 200       | 100       | 11.10       |               |
| LPC-01A-7  | 250       | 125       | 13.25       |               |
| LPC-01A-8  | 300       | 150       | 15.50       |               |

XQJ-LPC-02A 型铝合金水平弯通配线槽  
Type XQJ-LPC-02A Al alloy horizontal bend duct




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|-----------|-------------|
| LPC-02A-1  | 50        | 25        | 150       | 1.25        |
| LPC-02A-2  | 80        | 40        | 280       | 2.15        |
| LPC-02A-3  | 100       | 50        | 300       | 2.50        |
| LPC-02A-4  | 120       | 60        | 320       | 2.80        |
| LPC-02A-5  | 150       | 75        | 350       | 4.40        |
| LPC-02A-6  | 200       | 100       | 450       | 5.80        |
| LPC-02A-7  | 250       | 125       | 500       | 6.30        |
| LPC-02A-8  | 300       | 150       | 650       | 7.20        |

XQJ-LPC-03A 型铝合金水平三通配线槽  
Type XQJ-LPC-03A Al alloy horizontal tee cable duct




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03A-1  | 50        | 25        | 250        | 150        | 2.67        |
| LPC-03A-2  | 80        | 40        | 480        | 280        | 3.30        |
| LPC-03A-3  | 100       | 50        | 500        | 300        | 3.40        |
| LPC-03A-4  | 120       | 60        | 520        | 320        | 4.00        |
| LPC-03A-5  | 150       | 75        | 550        | 350        | 6.25        |
| LPC-03A-6  | 200       | 100       | 700        | 450        | 8.55        |
| LPC-03A-7  | 250       | 125       | 750        | 500        | 11.05       |
| LPC-03A-8  | 300       | 150       | 1000       | 650        | 14.10       |

XQJ-LPC-03B 型铝合金上垂直三通  
Type XQJ-LPC-03B Al alloy upward vertical tee




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03B-1  | 50        | 25        | 225        | 125        | 1.84        |
| LPC-03B-2  | 80        | 40        | 440        | 240        | 2.20        |
| LPC-03B-3  | 100       | 50        | 450        | 250        | 2.85        |
| LPC-03B-4  | 120       | 60        | 460        | 260        | 3.30        |
| LPC-03B-5  | 150       | 75        | 475        | 275        | 5.25        |
| LPC-03B-6  | 200       | 100       | 600        | 350        | 7.30        |
| LPC-03B-7  | 250       | 125       | 625        | 375        | 9.40        |
| LPC-03B-8  | 300       | 150       | 850        | 500        | 11.60       |

XQJ-LPC-03C 型铝合金下垂直三通  
Type XQJ-LPC-03C Al alloy downward vertical tee




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03C-1  | 50        | 25        | 225        | 125        | 1.90        |
| LPC-03C-2  | 80        | 40        | 440        | 240        | 2.25        |
| LPC-03C-3  | 100       | 50        | 450        | 250        | 3.00        |
| LPC-03C-4  | 120       | 60        | 460        | 260        | 3.40        |
| LPC-03C-5  | 150       | 75        | 475        | 275        | 5.40        |
| LPC-03C-6  | 200       | 100       | 600        | 350        | 7.50        |
| LPC-03C-7  | 250       | 125       | 625        | 375        | 9.80        |
| LPC-03C-8  | 300       | 150       | 850        | 500        | 11.90       |

XQJ-LPC-03D 型铝合金上侧垂直三通  
Type XQJ-LPC-03D Al alloy topside vertical tee




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03D-1  | 50        | 25        | 250        | 125        | 1.94        |
| LPC-03D-2  | 80        | 40        | 480        | 240        | 2.25        |
| LPC-03D-3  | 100       | 50        | 500        | 250        | 2.60        |
| LPC-03D-4  | 120       | 60        | 520        | 260        | 3.40        |
| LPC-03D-5  | 150       | 75        | 550        | 275        | 5.30        |
| LPC-03D-6  | 200       | 100       | 700        | 350        | 7.40        |
| LPC-03D-7  | 250       | 125       | 750        | 375        | 9.60        |
| LPC-03D-8  | 300       | 150       | 1000       | 500        | 11.70       |

XQJ-LPC-03E 型铝合金下侧垂直三通  
Type XQJ-LPC-03E Al alloy bottom side vertical tee

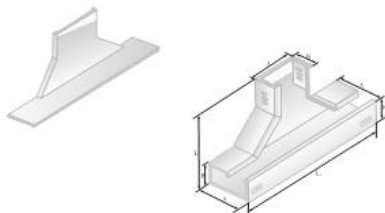


| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03E-1  | 50        | 25        | 250        | 125        | 1.85        |
| LPC-03E-2  | 80        | 40        | 480        | 240        | 2.30        |
| LPC-03E-3  | 100       | 50        | 500        | 250        | 2.85        |
| LPC-03E-4  | 120       | 60        | 520        | 260        | 3.60        |
| LPC-03E-5  | 150       | 75        | 550        | 275        | 5.75        |
| LPC-03E-6  | 200       | 100       | 700        | 350        | 7.90        |
| LPC-03E-7  | 250       | 125       | 750        | 375        | 10.0        |
| LPC-03E-8  | 300       | 150       | 1000       | 500        | 13.50       |

XQJ-LPC-03F 型铝合金上角垂直三通  
Type XQJ-LPC-03F Al alloy top angel vertical tee

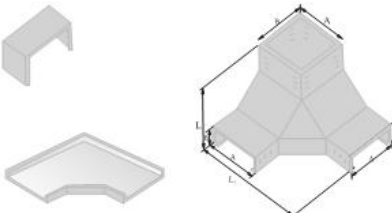

| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03F-1  | 50        | 25        | 150        | 125        | 2.80        |
| LPC-03F-2  | 80        | 40        | 280        | 240        | 3.45        |
| LPC-03F-3  | 100       | 50        | 300        | 250        | 4.10        |
| LPC-03F-4  | 120       | 60        | 320        | 260        | 4.80        |
| LPC-03F-5  | 150       | 75        | 350        | 275        | 7.60        |
| LPC-03F-6  | 200       | 100       | 450        | 350        | 10.40       |
| LPC-03F-7  | 250       | 125       | 500        | 375        | 13.30       |
| LPC-03F-8  | 300       | 150       | 650        | 500        | 16.20       |

XQJ-LPC-03G 型铝合金下角垂直三通  
Type XQJ-LPC-03G Al alloy bottom angel vertical tee




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-03G-1  | 50        | 25        | 150        | 125        | 2.30        |
| LPC-03G-2  | 80        | 40        | 280        | 240        | 2.80        |
| LPC-03G-3  | 100       | 50        | 300        | 250        | 3.30        |
| LPC-03G-4  | 120       | 60        | 320        | 260        | 3.80        |
| LPC-03G-5  | 150       | 75        | 350        | 275        | 6.00        |
| LPC-03G-6  | 200       | 100       | 450        | 350        | 8.30        |
| LPC-03G-7  | 250       | 125       | 500        | 375        | 10.70       |
| LPC-03G-8  | 300       | 150       | 650        | 500        | 13.10       |




## XQJ-LQJ 铝合金电缆桥架 XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LPC-04A 型铝合金水平四通配线槽  
Type XQJ-LPC-04A Al alloy horizontal cross cable duct

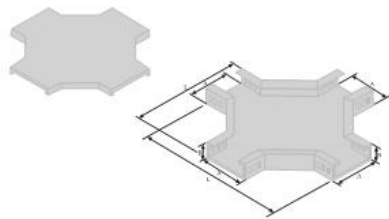


| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|-----------|-------------|
| LPC-04A-1  | 50        | 25        | 250       | 3.90        |
| LPC-04A-2  | 80        | 40        | 480       | 4.30        |
| LPC-04A-3  | 100       | 50        | 500       | 4.75        |
| LPC-04A-4  | 120       | 60        | 520       | 5.40        |
| LPC-04A-5  | 150       | 75        | 550       | 8.40        |
| LPC-04A-6  | 200       | 100       | 700       | 11.45       |
| LPC-04A-7  | 250       | 125       | 750       | 14.60       |
| LPC-04A-8  | 300       | 150       | 1000      | 17.20       |

XQJ-LPC-04B 型铝合金上垂直四通  
Type XQJ-LPC-04B Al alloy upward vertical cross

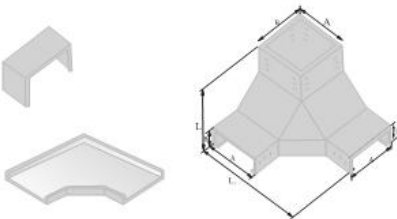


| 型号<br>Mode | A1×B1<br>(mm) | L1<br>(mm) | L2<br>(mm) | L3<br>(mm) | 重量<br>w(kg) |
|------------|---------------|------------|------------|------------|-------------|
| LPC-04B-1  | 50×25         | 250        | 150        | 125        | 1.25        |
| LPC-04B-2  | 80×40         | 480        | 280        | 240        | 3.70        |
| LPC-04B-3  | 100×50        | 500        | 300        | 250        | 5.00        |
| LPC-04B-4  | 120×60        | 520        | 320        | 260        | 6.00        |
| LPC-04B-5  | 150×75        | 550        | 350        | 275        | 9.35        |
| LPC-04B-6  | 200×100       | 700        | 450        | 350        | 13.00       |
| LPC-04B-7  | 250×125       | 750        | 500        | 375        | 16.30       |
| LPC-04B-8  | 300×150       | 1000       | 650        | 500        | 19.60       |

XQJ-LPC-05A 型铝合金垂直上弯通  
Type XQJ-LPC-05A Al alloy vertical top bend

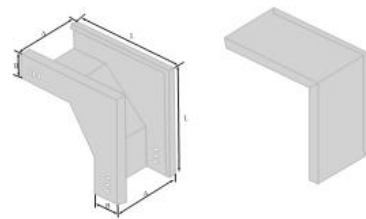


| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|-----------|-------------|
| LPC-05A-1  | 50        | 25        | 125       | 1.30        |
| LPC-05A-2  | 80        | 40        | 240       | 1.60        |
| LPC-05A-3  | 100       | 50        | 250       | 1.90        |
| LPC-05A-4  | 120       | 60        | 260       | 2.30        |
| LPC-05A-5  | 150       | 75        | 275       | 3.40        |
| LPC-05A-6  | 200       | 100       | 350       | 4.50        |
| LPC-05A-7  | 250       | 125       | 375       | 5.70        |
| LPC-05A-8  | 300       | 150       | 500       | 6.50        |

XQJ-LPC-05B 型铝合金垂直下弯通  
Type XQJ-LPC-05B Al alloy vertical bottom bend



| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|-----------|-------------|
| LPC-05B-1  | 50        | 25        | 125       | 1.60        |
| LPC-05B-2  | 80        | 40        | 240       | 1.80        |
| LPC-05B-3  | 100       | 50        | 250       | 2.20        |
| LPC-05B-4  | 120       | 60        | 260       | 2.65        |
| LPC-05B-5  | 150       | 75        | 275       | 3.80        |
| LPC-05B-6  | 200       | 100       | 350       | 4.90        |
| LPC-05B-7  | 250       | 125       | 375       | 6.15        |
| LPC-05B-8  | 300       | 150       | 500       | 7.40        |

XQJ-LPC-05C 型铝合金垂直左上弯通  
Type XQJ-LPC-05C Al alloy vertical left top bend




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-05C-1  | 50        | 25        | 150        | 100        | 1.10        |
| LPC-05C-2  | 80        | 40        | 280        | 180        | 1.50        |
| LPC-05C-3  | 100       | 50        | 300        | 200        | 2.00        |
| LPC-05C-4  | 120       | 60        | 320        | 220        | 2.60        |
| LPC-05C-5  | 150       | 75        | 350        | 250        | 3.85        |
| LPC-05C-6  | 200       | 100       | 450        | 300        | 5.10        |
| LPC-05C-7  | 250       | 125       | 500        | 350        | 6.80        |
| LPC-05C-8  | 300       | 150       | 650        | 500        | 8.20        |

XQJ-LPC-05D 型铝合金垂直左下弯通  
Type XQJ-LPC-05D Al alloy vertical left bottom bend




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-05D-1  | 50        | 25        | 150        | 100        | 1.40        |
| LPC-05D-2  | 80        | 40        | 280        | 180        | 1.70        |
| LPC-05D-3  | 100       | 50        | 300        | 200        | 2.20        |
| LPC-05D-4  | 120       | 60        | 320        | 220        | 2.70        |
| LPC-05D-5  | 150       | 75        | 350        | 250        | 4.00        |
| LPC-05D-6  | 200       | 100       | 450        | 300        | 5.50        |
| LPC-05D-7  | 250       | 125       | 500        | 350        | 7.20        |
| LPC-05D-8  | 300       | 150       | 650        | 500        | 9.40        |

XQJ-LPC-05E 型铝合金垂直右上弯通  
Type XQJ-LPC-05E Al alloy vertical right top bend




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-05E-1  | 50        | 25        | 150        | 100        | 1.10        |
| LPC-05E-2  | 80        | 40        | 280        | 180        | 1.45        |
| LPC-05E-3  | 100       | 50        | 300        | 200        | 2.00        |
| LPC-05E-4  | 120       | 60        | 320        | 220        | 2.26        |
| LPC-05E-5  | 150       | 75        | 350        | 250        | 3.85        |
| LPC-05E-6  | 200       | 100       | 450        | 300        | 5.70        |
| LPC-05E-7  | 250       | 125       | 500        | 350        | 7.60        |
| LPC-05E-8  | 300       | 150       | 650        | 500        | 9.50        |

XQJ-LPC-05F 型铝合金垂直右下弯通  
Type XQJ-LPC-05F Al alloy vertical right bottom bend



| 型号<br>Mode | A<br>(mm) | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|------------|------------|-------------|
| LPC-05F-1  | 50        | 25        | 150        | 125        | 1.40        |
| LPC-05F-2  | 80        | 40        | 280        | 240        | 1.70        |
| LPC-05F-3  | 100       | 50        | 300        | 250        | 2.20        |
| LPC-05F-4  | 120       | 60        | 320        | 260        | 2.90        |
| LPC-05F-5  | 150       | 75        | 350        | 275        | 4.00        |
| LPC-05F-6  | 200       | 100       | 450        | 350        | 5.80        |
| LPC-05F-7  | 250       | 125       | 500        | 375        | 7.70        |
| LPC-05F-8  | 300       | 150       | 650        | 500        | 9.70        |

XQJ-LPC-06A 型铝合金异径接头  
Type XQJ-LPC-06A Al alloy reducer connector




| 型号<br>Mode | A1×B1<br>(mm) | A2×B2<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|---------------|---------------|-----------|-------------|
| LPC-06A-1  | 50×25         | 100×50        | 300       | 1.40        |
| LPC-06A-2  | 80×40         | 150×75        | 300       | 2.10        |
| LPC-06A-3  | 80×40         | 200×100       | 300       | 2.45        |
| LPC-06A-4  | 100×50        | 200×100       | 350       | 3.80        |
| LPC-06A-5  | 100×50        | 300×150       | 450       | 4.10        |
| LPC-06A-6  | 200×100       | 250×125       | 350       | 4.40        |
| LPC-06A-7  | 200×100       | 300×150       | 450       | 5.10        |
| LPC-06A-8  | 200×125       | 300×150       | 450       | 5.40        |

# XQJ-LQJ 铝合金电缆桥架


## XQJ-LQJ Anti-corrosive Al-alloy Support

XQJ-LPC-06B 型铝合金异径接头  
Type XQJ-LPC-06B Al alloy reducer connector



| 型号<br>Mode | A1×B1<br>(mm) | A2×B2<br>(mm) | L<br>(mm) | 重量<br>w(kg) |
|------------|---------------|---------------|-----------|-------------|
| LPC-06B-1  | 50×25         | 100×50        | 300       | 1.40        |
| LPC-06B-2  | 80×40         | 150×75        | 300       | 2.10        |
| LPC-06B-3  | 80×40         | 200×100       | 300       | 2.45        |
| LPC-06B-4  | 100×50        | 200×100       | 350       | 3.80        |
| LPC-06B-5  | 100×50        | 300×150       | 450       | 4.10        |
| LPC-06B-6  | 200×100       | 250×125       | 350       | 4.40        |
| LPC-06B-7  | 200×100       | 300×150       | 450       | 5.10        |
| LPC-06B-8  | 200×125       | 300×150       | 450       | 5.40        |

XQJ-LPC-01B 型铝合金配线槽封头  
Type XQJ-LPC-01B Al alloy cable duct head




| 型号<br>Mode | A<br>(mm) | B<br>(mm) | A1×B1<br>(mm) | 重量<br>w(kg) |
|------------|-----------|-----------|---------------|-------------|
| LPC-01B-1  | 50        | 25        | 45×21         | 0.10        |
| LPC-01B-2  | 80        | 40        | 76×36         | 0.15        |
| LPC-01B-3  | 100       | 50        | 96×46         | 0.20        |
| LPC-01B-4  | 120       | 60        | 116×56        | 0.32        |
| LPC-01B-5  | 150       | 75        | 145×70        | 0.45        |
| LPC-01B-6  | 200       | 100       | 195×95        | 0.60        |
| LPC-01B-7  | 250       | 125       | 245×120       | 0.68        |
| LPC-01B-8  | 300       | 150       | 295×145       | 0.72        |

XQJ-LFZ-01 型铝合金直通护罩  
Type XQJ-LFZ-01 Al alloy straight cover




| 型号<br>Mode | B<br>(mm) | 重量<br>w(kg) | 备注<br>Remarks |
|------------|-----------|-------------|---------------|
| LFZ-01-2   | 200       | 5.10        |               |
| LFZ-01-3   | 300       | 7.30        |               |
| LFZ-01-4   | 400       | 10.40       |               |
| LFZ-01-5   | 500       | 12.60       |               |
| LFZ-01-6   | 600       | 15.45       |               |
| LFZ-01-8   | 800       | 18.8        |               |
| LFZ-01-9   | 900       | 20.10       |               |
| LFZ-01-10  | 1000      | 23.25       |               |

XQJ-LFZ-02 型铝合金水平弯通护罩  
Type XQJ-LFZ-02 Al alloy horizontal bend cover

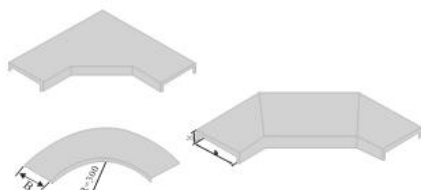


| 型号<br>Mode | B<br>(mm) | L (mm) |      | 重量<br>w(kg) |
|------------|-----------|--------|------|-------------|
|            |           | I      | II   |             |
| LPC-02-2   | 200       | 600    | 700  | 4.25        |
| LPC-02-3   | 300       | 700    | 800  | 6.20        |
| LPC-02-4   | 400       | 800    | 900  | 8.20        |
| LPC-02-5   | 500       | 900    | 1000 | 10.40       |
| LPC-02-6   | 600       | 1000   | 1100 | 15.30       |
| LPC-02-8   | 800       | 1200   | 1300 | 17.80       |
| LPC-02-9   | 900       | 1300   | 1400 | 21.30       |
| LPC-02-10  | 1000      | 1400   | 1500 | 25.40       |

XQJ-LFZ-03 型铝合金水平三通护罩  
Type XQJ-LFZ-03 Al alloy horizontal tee cover

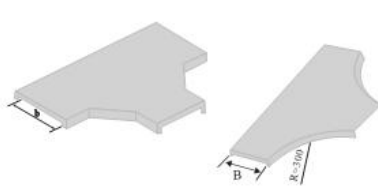

| 型号<br>Mode | B<br>(mm) | L1<br>(mm) | L2<br>(mm) | 重量<br>w(kg) |
|------------|-----------|------------|------------|-------------|
| LFZ-03-2   | 200       | 700        | 1200       | 8.30        |
| LFZ-03-3   | 300       | 800        | 1300       | 12.00       |
| LFZ-03-4   | 400       | 900        | 1400       | 14.25       |
| LFZ-03-5   | 500       | 1000       | 1500       | 16.70       |
| LFZ-03-6   | 600       | 1100       | 1600       | 22.10       |
| LFZ-03-8   | 800       | 1300       | 1800       | 24.80       |
| LFZ-03-9   | 900       | 1400       | 1900       | 28.25       |
| LFZ-03-10  | 1000      | 1500       | 2000       | 31.10       |

XQJ-LFZ-04 型铝合金水平四通护罩  
Type XQJ-LFZ-04 Al alloy horizontal cross cover

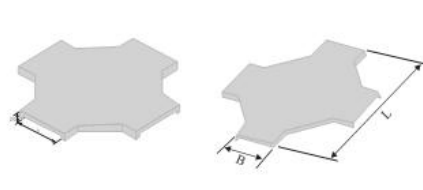

| 型号<br>Mode | B<br>(mm) | L (mm) |      | 重量<br>w(kg) |
|------------|-----------|--------|------|-------------|
|            |           | I      | II   |             |
| LFZ-04-2   | 200       | 1000   | 1200 | 13.00       |
| LFZ-04-3   | 300       | 1100   | 1300 | 18.10       |
| LFZ-04-4   | 400       | 1200   | 1400 | 20.80       |
| LFZ-04-5   | 500       | 1300   | 1500 | 23.65       |
| LFZ-04-6   | 600       | 1400   | 1600 | 29.95       |
| LFZ-04-8   | 800       | 1600   | 1800 | 33.95       |
| LFZ-04-9   | 900       | 1700   | 1900 | 37.00       |
| LFZ-04-10  | 1000      | 1800   | 2000 | 41.20       |

XQJ-LFZ-05 型铝合金垂直下弯通护罩  
Type XQJ-LFZ-05 Al alloy vertical bend cover




| 型号<br>Mode | B<br>(mm) | L (mm) |     |     | 重量<br>w(kg) |
|------------|-----------|--------|-----|-----|-------------|
|            |           | I      | II  | III |             |
| LPC-02-2   | 200       | 300    | 450 | 500 | 2.00        |
| LPC-02-3   | 300       |        |     |     | 3.10        |
| LPC-02-4   | 400       |        |     |     | 3.80        |
| LPC-02-5   | 500       |        |     |     | 4.55        |
| LPC-02-6   | 600       |        |     |     | 5.95        |
| LPC-02-8   | 800       |        |     |     | 6.25        |
| LPC-02-9   | 900       |        |     |     | 7.35        |
| LPC-02-10  | 1000      |        |     |     | 8.60        |

XQJ-LFZ-06 型铝合金垂直上弯通护罩  
Type XQJ-LFZ-06 Al alloy vertical top bend cover



| 型号<br>Mode | B<br>(mm) | L (mm) |     |     | 重量<br>w(kg) |
|------------|-----------|--------|-----|-----|-------------|
|            |           | I      | II  | III |             |
| LFZ-06-2   | 200       | 400    | 550 | 600 | 2.98        |
| LFZ-06-3   | 300       |        |     |     | 3.85        |
| LFZ-06-4   | 400       |        |     |     | 4.70        |
| LFZ-06-5   | 500       |        |     |     | 5.60        |
| LFZ-06-6   | 600       |        |     |     | 7.35        |
| LFZ-06-8   | 800       |        |     |     | 8.25        |
| LFZ-06-9   | 900       |        |     |     | 9.10        |
| LFZ-06-10  | 1000      |        |     |     | 10.20       |

XQJ-LFZ-07 型铝合金转动弯通护罩  
Type XQJ-LFZ-07 Al alloy rotatable bend cover









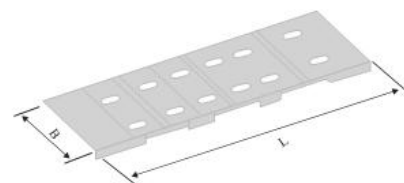


| 型号<br>Mode | B<br>(mm) | L (mm) |     |      | 重量<br>w(kg) |
|------------|-----------|--------|-----|------|-------------|
|            |           | I      | II  | III  |             |
| LFZ-07-2   | 200       | 600    | 800 | 1200 | 3.00        |
| LFZ-07-3   | 300       |        |     |      | 4.65        |
| LFZ-07-4   | 400       |        |     |      | 5.70        |
| LFZ-07-5   | 500       |        |     |      | 6.80        |
| LFZ-07-6   | 600       |        |     |      | 8.90        |
| LFZ-07-8   | 800       |        |     |      | 10.00       |
| LFZ-07-9   | 900       |        |     |      | 11.30       |
| LFZ-07-10  | 1000      |        |     |      | 12.60       |




# XQJ-LQJ 铝合金电缆桥架

## XQJ-LQJ Anti-corrosive Al-alloy Support

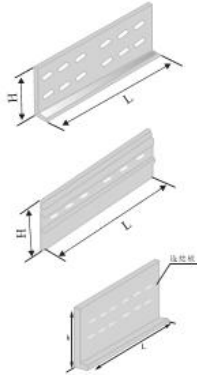
| 产品外型<br>Shape                                                                                                                                                | 型号<br>Model                                                                                                                                                    |                | H<br>(mm)              | L<br>(mm)              | 重量<br>w (kg)           |                        | 安装图例<br>Installation                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------|------------------------|------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>XQJ-LQJ-LF-01 型直接片</b><br>Type XQJ-LQJ-LF-01 Direct connection piece<br> | A<br>型                                                                                                                                                         | LQJ-LF-01A-25  | 25                     | 122                    | 25                     | 0.10                   | <br>LF-01A型直接片<br>Type LF-01A Direct connection piece<br><br>注: "A型" 直接片适用于AT、AP、AC型桥架和LPC型配线槽; "B型" 直接片适用于BT、BP、BC型桥架; "C型" 直接片适用于CT、CP、CC型桥架。<br><br>Note: Type A for AT, AP, LPC, Type B for BT, BC Type C for CT, CP, CC |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-40  |                        | 182                    | 40                     | 0.16                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-50  |                        |                        | 50                     | 0.18                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-60  |                        |                        | 60                     | 0.22                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-75  |                        |                        | 75                     | 0.30                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-100 |                        |                        | 100                    | 0.45                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-125 |                        |                        | 125                    | 0.95                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-150 |                        |                        | 150                    | 1.25                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJ-LF-01A-200                                                                                                                                                 | 175            | 200                    |                        | 1.40                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | B<br>型                                                                                                                                                         | LQJ-LF-01A-100 | 70                     | 182                    | 100                    | 0.60                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-150 | 120                    | 382                    | 150                    | 0.90                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-200 | 170                    |                        | 200                    | 1.34                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | C<br>型                                                                                                                                                         | LQJ-LF-01A-100 | 70                     | 182                    | 100                    | 0.50                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-150 | 112                    | 382                    | 150                    | 0.90                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                | LQJ-LF-01A-200 | 162                    |                        | 200                    | 1.25                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| <b>XQJ-LQJ-LF-02 型调高片</b><br>Type XQJ-LQJ-LF-02 Height adjusting piece<br>  | 型号<br>Model                                                                                                                                                    |                | H <sub>1</sub><br>(mm) | H <sub>2</sub><br>(mm) | L<br>(mm)              | 重量<br>w (kg)           | <br>LF-02型调高片<br>Type LF-01A Height adjusting piece                                                                                                                                                                         |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/100                                                                                                                                              |                | 50                     | 75                     | 182                    | 0.40                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/150                                                                                                                                              |                | 50                     | 125                    | 282                    | 0.80                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/200                                                                                                                                              |                | 50                     | 175                    |                        | 1.20                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/150                                                                                                                                              |                | 75                     | 125                    |                        | 0.80                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/200                                                                                                                                              |                | 75                     | 175                    |                        | 1.10                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-02-75/200                                                                                                                                              |                | 125                    | 175                    | 328                    | 1.50                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | <b>XQJ-LQJ-LF-03 型弯接片</b><br>Type XQJ-LQJ-LF-03 Bended connection piece<br> | 型号<br>Model    |                        | H <sub>1</sub><br>(mm) | L <sub>1</sub><br>(mm) | L <sub>2</sub><br>(mm) |                                                                                                                                                                                                                                                                                                                 | 重量<br>w (kg)                                                                                                                |
| LQJE-LF-03-50                                                                                                                                                |                                                                                                                                                                | 25             | 91                     | 200                    | 0.30                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| LQJE-LF-03-75                                                                                                                                                |                                                                                                                                                                | 50             |                        |                        | 0.50                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| LQJE-LF-03-100                                                                                                                                               |                                                                                                                                                                | 75             |                        |                        | 1.20                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| LQJE-LF-03-150                                                                                                                                               |                                                                                                                                                                | 125            | 191                    | 300                    | 1.70                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| LQJE-LF-03-200                                                                                                                                               |                                                                                                                                                                | 175            |                        |                        | 1.90                   |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| <b>XQJ-LQJ-LF-04 型调角片</b><br>Type XQJ-LQJ-LF-04 Angle adjusting piece<br> | 型号<br>Model                                                                                                                                                    |                | 配套桥架高度                 | H<br>(mm)              | L <sub>1</sub><br>(mm) | 重量<br>w (kg)           | <br>LF-04型调角片<br>Type LF-04 Angle adjusting piece                                                                                                                                                                          |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-04-75                                                                                                                                                  |                | 75                     | 50                     | 166                    | 0.70                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-04-100                                                                                                                                                 |                | 100                    | 75                     | 191                    | 1.30                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-04-150                                                                                                                                                 |                | 150                    | 125                    | 341                    | 2.00                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-04-200                                                                                                                                                 |                | 200                    | 145                    | 391                    | 2.90                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| <b>XQJ-LQJ-LF-05 型调宽片</b><br>Type XQJ-LQJ-LF-05 Angle adjusting piece<br> | 型号<br>Model                                                                                                                                                    |                | H<br>(mm)              | L <sub>1</sub><br>(mm) | B <sub>1</sub><br>(mm) | 重量<br>w (kg)           | Type LF-05 With adjusting piece<br><br>LF-05型调宽片<br><br>LF-01C型直接片<br>Type LF-01C Direct connection piece                                                                                                                  |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-100                                                                                                                                                 |                | 75                     | 50                     | 100                    | 0.80                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-150                                                                                                                                                 |                |                        |                        | 150                    | 1.20                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-200                                                                                                                                                 |                | 100                    | 75                     | 200                    | 1.60                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-300                                                                                                                                                 |                | 150                    | 125                    | 300                    | 2.05                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-400                                                                                                                                                 |                | 200                    | 175                    | 400                    | 2.60                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-05-500                                                                                                                                                 |                | 200                    | 175                    | 500                    | 3.10                   |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |
| <b>XQJ-LQJ-LF-06 型铝合金桥架终端封头</b><br>Type XQJ-LQJ-LF-06 End piece<br>       | 型号<br>Model                                                                                                                                                    |                | H<br>(mm)              | B<br>(mm)              | H <sub>1</sub><br>(mm) | B <sub>1</sub><br>(mm) | 重量<br>w (kg)                                                                                                                                                                                                                                                                                                    | <br>LF-06型终端封头<br>Type LF-06 End piece |
|                                                                                                                                                              | LQJE-LF-06-100                                                                                                                                                 |                | 75                     | 100                    | 50                     | 95                     | 0.90                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-150                                                                                                                                                 |                |                        | 150                    |                        | 145                    | 1.30                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-200                                                                                                                                                 |                |                        | 200                    |                        | 195                    | 1.70                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-250                                                                                                                                                 |                | 100                    | 250                    | 75                     | 245                    | 2.15                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-300                                                                                                                                                 |                |                        | 300                    |                        | 295                    | 2.70                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-400                                                                                                                                                 |                | 150                    | 400                    | 125                    | 395                    | 3.20                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-500                                                                                                                                                 |                |                        | 500                    |                        | 495                    | 3.60                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-600                                                                                                                                                 |                | 200                    | 600                    | 175                    | 595                    | 3.90                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-800                                                                                                                                                 |                |                        | 800                    |                        | 795                    | 4.20                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              | LQJE-LF-06-1000                                                                                                                                                |                |                        | 1000                   |                        | 995                    | 4.60                                                                                                                                                                                                                                                                                                            |                                                                                                                             |
|                                                                                                                                                              |                                                                                                                                                                |                |                        |                        |                        |                        |                                                                                                                                                                                                                                                                                                                 |                                                                                                                             |

## 竖井 Shaft Joints

### 电缆竖井XQJ-SJ Cable Shaft XQJ-SJ




I型



II型

| 型号<br>Model | a   | b    | C    | D   | H    | 重量kg<br>Heat |
|-------------|-----|------|------|-----|------|--------------|
| SJ-3×4      | 300 | 400  | 240  | 600 | 1000 | 51.63        |
| SJ-6×4      | 600 |      |      |     |      | 72.42        |
| SJ-3×5      | 300 | 500  | 340  |     |      | 59.38        |
| SJ-6×5      | 600 |      |      |     |      | 78.64        |
| SJ-3×6      | 300 | 600  | 440  |     |      | 65.51        |
| SJ-6×6      | 600 |      |      |     |      | 86.50        |
| SJ-3×8      | 300 | 800  | 600  |     |      | 89.72        |
| SJ-6×8      | 600 |      |      |     |      | 112.65       |
| SJ-3×10     | 300 | 1000 | 800  |     |      | 105.90       |
| SJ-6×10     | 600 |      |      |     |      | 128.63       |
| SJ-3×12     | 300 | 1200 | 1000 |     |      | 121.52       |
| SJ-6×12     | 600 |      |      |     |      | 144.36       |

### 竖井盖板 Shaft Cover

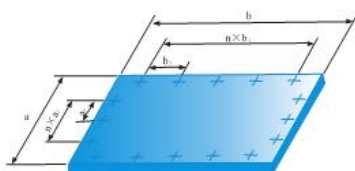


| 型号<br>Model | a   | b    | $n \times b_1$ | $n \times a_1$ | 重量kg<br>Heat |
|-------------|-----|------|----------------|----------------|--------------|
| SJ-3×4      | 400 | 500  | 4×110          | 4×85           | 4.4          |
| SJ-6×4      | 700 |      |                | 5×128          | 7.9          |
| SJ-3×5      | 400 | 600  | 4×135          | 4×85           | 5.3          |
| SJ-6×5      | 700 |      |                | 5×128          | 9.5          |
| SJ-3×6      | 400 | 700  | 5×128          | 4×85           | 6.2          |
| SJ-6×6      | 700 |      |                | 5×128          | 11.1         |
| SJ-3×8      | 400 | 900  | 6×142          | 4×88           | 8.7          |
| SJ-6×8      | 700 |      |                | 5×130          | 15.1         |
| SJ-3×10     | 400 | 1100 | 10×105         | 4×88           | 10.6         |
| SJ-6×10     | 700 |      |                | 5×130          | 18.4         |
| SJ-3×12     | 400 | 1300 | 10×125         | 4×88           | 12.5         |
| SJ-6×12     | 700 |      |                | 5×130          | 21.7         |




## 竖井 Shaft Joints

竖井接头单侧 XQJ-SJ-1  
Single Sides of the Shaft Joints XQJ-SJ-1

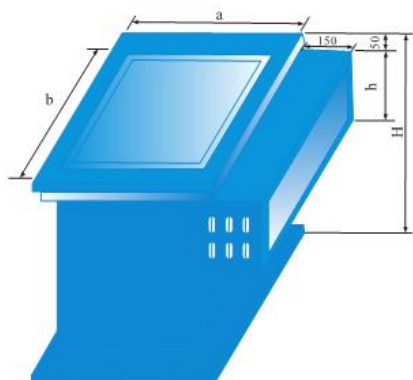

| 型号<br>Model | a       | b    | h   | H   | 重量kg<br>Heat |       |
|-------------|---------|------|-----|-----|--------------|-------|
|             |         |      |     |     | a=300        | a=600 |
| SJ-1-4×10   | 300/600 | 400  | 100 | 300 | 21.77        | 29.37 |
| SJ-1-5×10   |         | 500  |     |     | 24.80        | 32.30 |
| SJ-1-6×10   |         | 600  |     |     | 27.71        | 35.26 |
| SJ-1-8×10   |         | 800  |     |     | 41.01        | 50.37 |
| SJ-1-4×15   | 300/600 | 400  | 150 | 350 | 25.68        | 33.28 |
| SJ-1-5×15   |         | 500  |     |     | 26.66        | 36.17 |
| SJ-1-6×15   |         | 600  |     |     | 31.54        | 38.87 |
| SJ-1-8×15   |         | 800  |     |     | 44.76        | 54.12 |
| SJ-1-10×15  |         | 1000 |     |     | 51.86        | 61.30 |
| SJ-1-4×20   | 300/600 | 400  | 200 | 400 | 27.38        | 36.12 |
| SJ-1-5×20   |         | 500  |     |     | 30.49        | 38.80 |
| SJ-1-6×20   |         | 600  |     |     | 33.51        | 41.85 |
| SJ-1-8×20   |         | 800  |     |     | 47.00        | 57.15 |
| SJ-1-10×20  |         | 1000 |     |     | 54.34        | 64.63 |
| SJ-1-12×20  |         | 1200 |     |     | 61.71        | 71.86 |





竖井接头双侧 XQJ-SJ-2  
Two Sides of the Shaft Joints XQJ-SJ-2

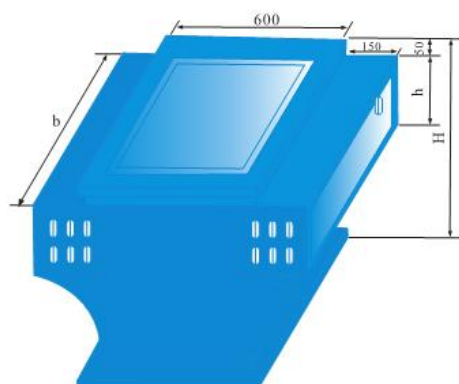

| 型号<br>Model | h   | H   | b    | 重量kg<br>Heat |
|-------------|-----|-----|------|--------------|
| SJ-2-4×10   | 100 | 300 | 400  | 32.14        |
| SJ-2-5×10   |     |     | 500  | 35.48        |
| SJ-2-6×10   |     |     | 600  | 38.85        |
| SJ-2-8×10   |     |     | 800  | 54.81        |
| SJ-2-4×15   | 150 | 350 | 400  | 34.94        |
| SJ-2-5×15   |     |     | 500  | 39.20        |
| SJ-2-6×15   |     |     | 600  | 42.52        |
| SJ-2-8×15   |     |     | 800  | 59.28        |
| SJ-2-10×15  |     |     | 1000 | 68.21        |
| SJ-2-4×20   | 200 | 400 | 400  | 43.41        |
| SJ-2-5×20   |     |     | 500  | 46.62        |
| SJ-2-6×20   |     |     | 600  | 49.92        |
| SJ-2-8×20   |     |     | 800  | 65.75        |
| SJ-2-10×20  |     |     | 1000 | 73.74        |
| SJ-2-12×20  |     |     | 1200 | 82.48        |


# Bus Dust Catalogue

## >>> 母线槽选型

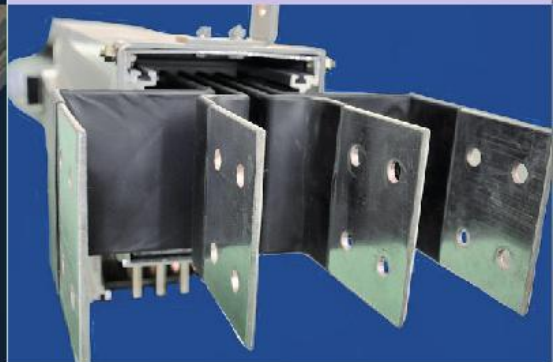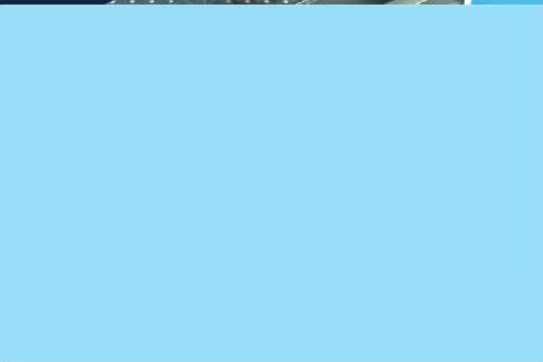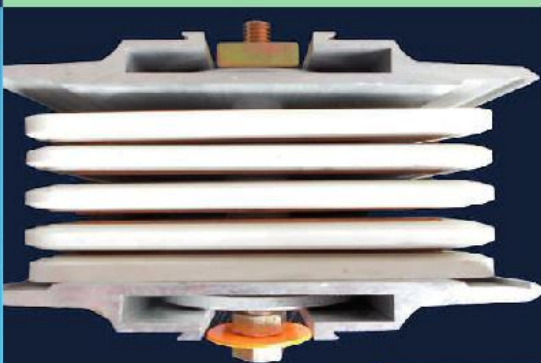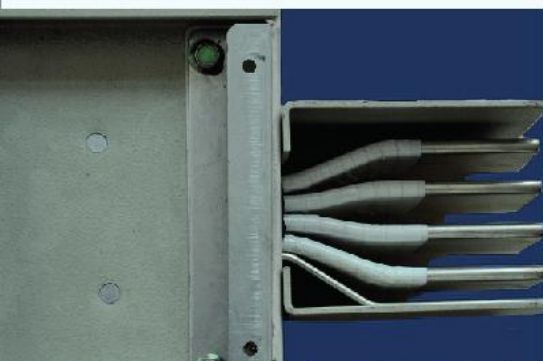



## 产品型号说明 Produce Type Expound

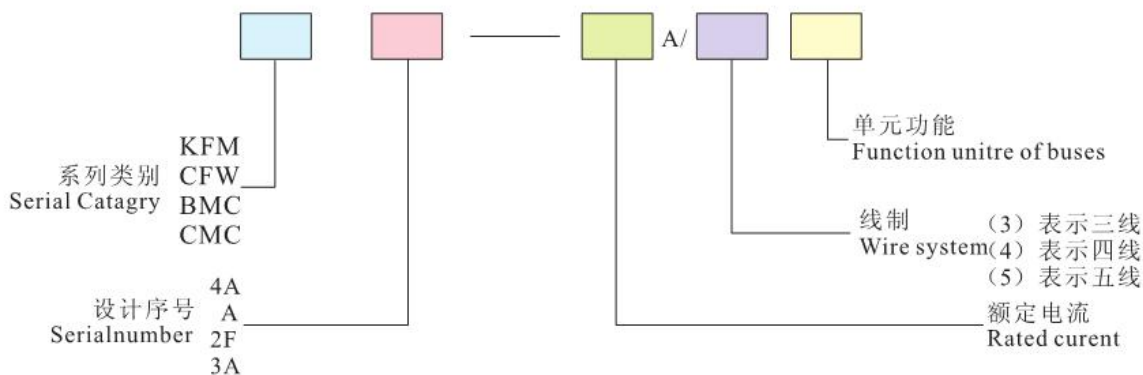

## 母线单元功能代号 Unite Number

|    |        |    |         |
|----|--------|----|---------|
| A  | 普通母线   | P  | 膨胀接头    |
| S  | 始端母线   | BY | 变容量接头   |
| Z  | 终端盖    | BX | 调节接头    |
| LS | L型水平接头 | SC | +字型垂直接头 |
| LC | L型垂直接头 | ZS | Z型水平接头  |
| TS | T型水平接头 | ZC | Z型垂直接头  |
| TC | T型垂直接头 | SH | 始端进线盒   |

|    |                    |    |                  |
|----|--------------------|----|------------------|
| A  | Feeder             | P  | Expansion        |
| S  | End feeder         | BY | Peducer          |
| Z  | End closer         | BX | Cnanged          |
| LS | L Horizontal elbow | SC | +Vertial offser  |
| LC | L Vertioal offser  | ZS | ZHonzontal elbow |
| TS | T Horizontal elbow | ZC | Z Vertical       |
| TC | T Vertical offser  | SH | Flanged end      |

母线变向节（弯头），用于水平或垂直安装时配电母线的连接及改变母线的走向。

直母线单元，与母线变向节配合，用于将电源接送至用电设备。

插接箱，用于由母线上引出电源分路。

始端母线，为电源引入单元，可直接与变压器或低压配电屏连接。

变容量节，为母线变换容量时的过渡节。膨胀节，为吸收因母线长期工作而引起热膨胀变形而设置的功能单元。

中间进线箱，适用于多种场合，一般在母线连接长度较长的情况下，将大大改善单端供电而至末端压降损失较大的状况。

终端封盖，安装于母线（或各分路）终端处，使外界不能接触到带电部位。

Bus deviation joint(bend) is used for connecting buses and changing their dircetions in vertical or horizontal installation.

Straight bus unit matched with bus deviation joint is used for the equipments, to which the power is tran-smitted.

Jack box is used for branching on the bus leading power.

Initial end bus is a power-leading unit and can directly connected with transformer or low voltage distribution screen.

Variable capacity joint is a transition joint at the time when the bus is changed in capacity. Expansion joint is a functional unit designed for heat expansion deformation caused by the work of bus for a long time.

Intermediate in-wire box is applicable for many various places.In general,under the condition of connecting too long buses, it will greatly improve the comsumption of voltage reduce powered from the single end to the terminal.

Terminal cover is installed at the terminal(or each branch)to make the outsides not contact the currentcarrying positions.



## 技术数据 The Main Techno-Parameter

本厂生产的各种系列母线槽，适用于高层建筑，多层工业厂房，机床密集的车间，产品工艺多变的车间，老车间及厂房的改造，各种实验室、展览馆、体育馆、宾馆、银行、娱乐等场所作电力馈电及配电使用。具有安全可靠，安装方便，施工灵活，体积小容量大，设计施工周期短，使用寿命长等特点，具体的技术数据见下表：

The various series of bus channels produced by this factory are applicable for high buildings, industrial factory building with many floors, workshops with concentrated lathes and with varied technology, the old workshops rebuilt, various labs, exhibition halls, gyms, hotels, banks, entertainment and other places, and are used for feeding and di-stributing electricity. It has the characteristics of safety & reliability, easy erection, flexible construction, small vol-ume but large capacity, short cycle for construction, long service life and the like. The concrete technical parameters are as follows:

|                                        |          |                                                                                                 |        |        |        |        |        |
|----------------------------------------|----------|-------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|
| 符合标准 Standard                          |          | IEC439-2-1982 ZBK36002-89<br>GB 1497 GB 7251-87                                                 |        |        |        |        |        |
| 海拔 Sea Level                           | M        | 不大于 2000 Not higher then 2000                                                                   |        |        |        |        |        |
| 环境温度 Ambient Temp                      | ℃        | -5—+40 (24小时内平均温度不大于+35℃)<br>-5—+40 (average temp is not higher than+35within 24hrs.)           |        |        |        |        |        |
| 相对湿度 Ralative Humidity                 |          | +40℃时不大于50%, +20℃时不大于90%<br>Not higher than 50%when +40℃;not higher than 90% when +20℃          |        |        |        |        |        |
| 防护等级 Protective Grade                  |          | IP42(带附件达IP54)                                                                                  |        |        |        |        |        |
| 安装类别 Installation Categwry             |          | IV类 Clnsses IV                                                                                  |        |        |        |        |        |
| 污染等级 Polluted Grade                    |          | 2级Grade                                                                                         |        |        |        |        |        |
| 额定绝缘电压<br>Rated Insrlation Votage      | V(AC)    | 500                                                                                             |        |        |        |        |        |
| 额定工作电压<br>Rated Working Voltage        | V(AC)    | 400                                                                                             |        |        |        |        |        |
| 额定频率<br>Rated Frquency                 | HZ       | 50-60                                                                                           |        |        |        |        |        |
| 额定工作电流<br>Rated working Current        | A        | 100                                                                                             | 250    | 400    | 630    | 800    | 1000   |
| 电阻 Resistance                          | R × 10/m | 967                                                                                             | 94.4   | 70.8   | 73.0   | 61.4   | 46.6   |
| 阻抗 Impendence                          | Z × 10/m | 106.8                                                                                           | 103.8  | 83.2   | 72.4   | 69.8   | 53.8   |
| 电压降 Redution                           | V/m      | 0.0432                                                                                          | 0.0475 | 0.0360 | 0.089  | 0.1    | 0.0485 |
|                                        |          |                                                                                                 |        |        |        |        |        |
| 额定工作电流<br>Rated Working Current        | A        | 1250                                                                                            | 1600   | 2000   | 2500   | 3150   | 4000   |
| 电阻 Resistance                          | R × 10/m | 28.9                                                                                            | 23.6   | 21.3   | 14.4   | 12.1   | 10.0   |
| 阻抗 Impendence                          | Z × 10/m | 40.6                                                                                            | 38.0   | 24.1   | 19.7   | 16.5   | 12.1   |
| 电压降 Redution                           | V/m      | 0.059                                                                                           | 0.063  | 0.0814 | 0.0705 | 0.0684 | 0.068  |
|                                        |          |                                                                                                 |        |        |        |        |        |
| 各部位温升<br>Temp.Rise of Each<br>Position | (K)      | 连接端子 60 金属外壳 30 绝缘件表面 40<br>Connective terminal 60 Metal Shell 30 Surface of insulating part 40 |        |        |        |        |        |
| 电 强 度 Dielectin Stength                |          | 交流工频电压有效值 3750 V I min A.C.Working frequency(effective value)                                   |        |        |        |        |        |
| 绝缘电阻 Insulating Resistance             |          | 相与相及外壳之间不小于20m not less then 20m between phaceses and the shells                                |        |        |        |        |        |




## 母线槽与电缆供电系统比较 Comparison Between The Bus And The Cable In Power System

方便、安全、可靠


对于高层建筑、母线槽系统的技术和经济优势显得特别明显。它不用为每个层面设计和敷设独立的电缆，整个大楼仅需单一母线供电，将插接箱插入母线槽系统即可为每层楼供电，这显然比使用电缆更安全、更简便、更可靠。

### CONVENIENT,SAFE AND RELIABLE

In the high buildings, the bus channel system and its economic effect is obviously superior to the cable system in the supply of power. It 's not necessary to design and lay cables for each floor separately. The whole buidingonly needs a single bus system for the supply of power. Only after inserting the jack box into the bus system, can it supply the power for each floor. So it is obviously safer, simpler & easier and reliabler than the cable system.

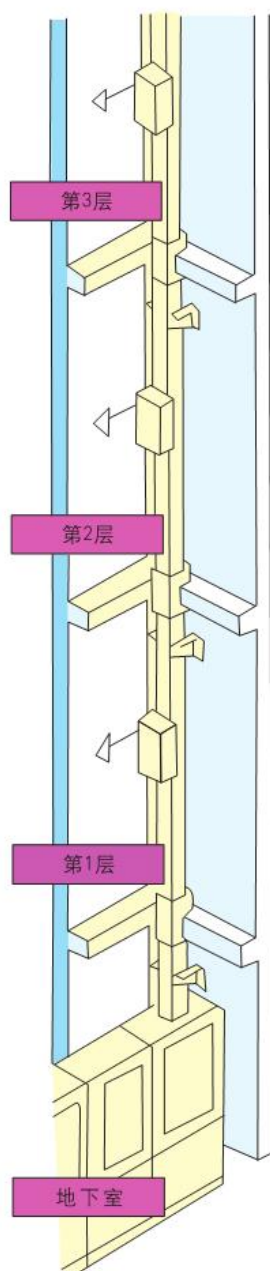

在高层建筑中  
in the High Building

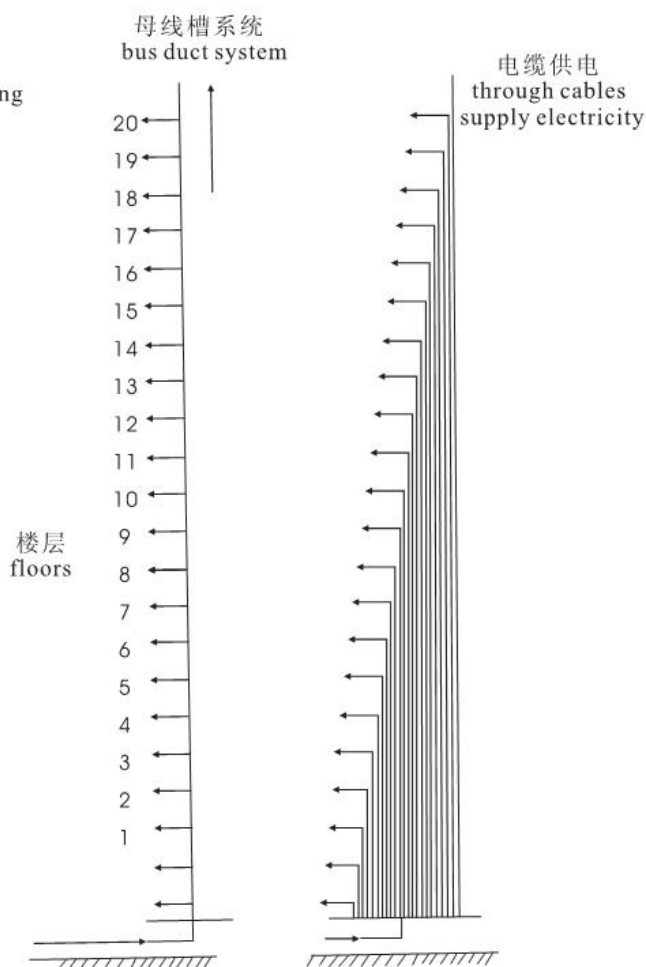


右图为传统的电缆供电方法，每层楼面都需要单独放线，需要很多电缆。左图为母线供电方法，只要使用单一的中心母线槽系统，即可为每层楼面供电。

Right Drawing shows the traditional method for supplying power. The cable must be separately laid on each floor. So a large quantity of cables are needed .

Left Drawing shows the method for supplying power through the bus. Only after a single centralbus channel system is adopted can the power be supplied for each floor through it.

母线槽安装示意图 Layout of Bus Duct installation

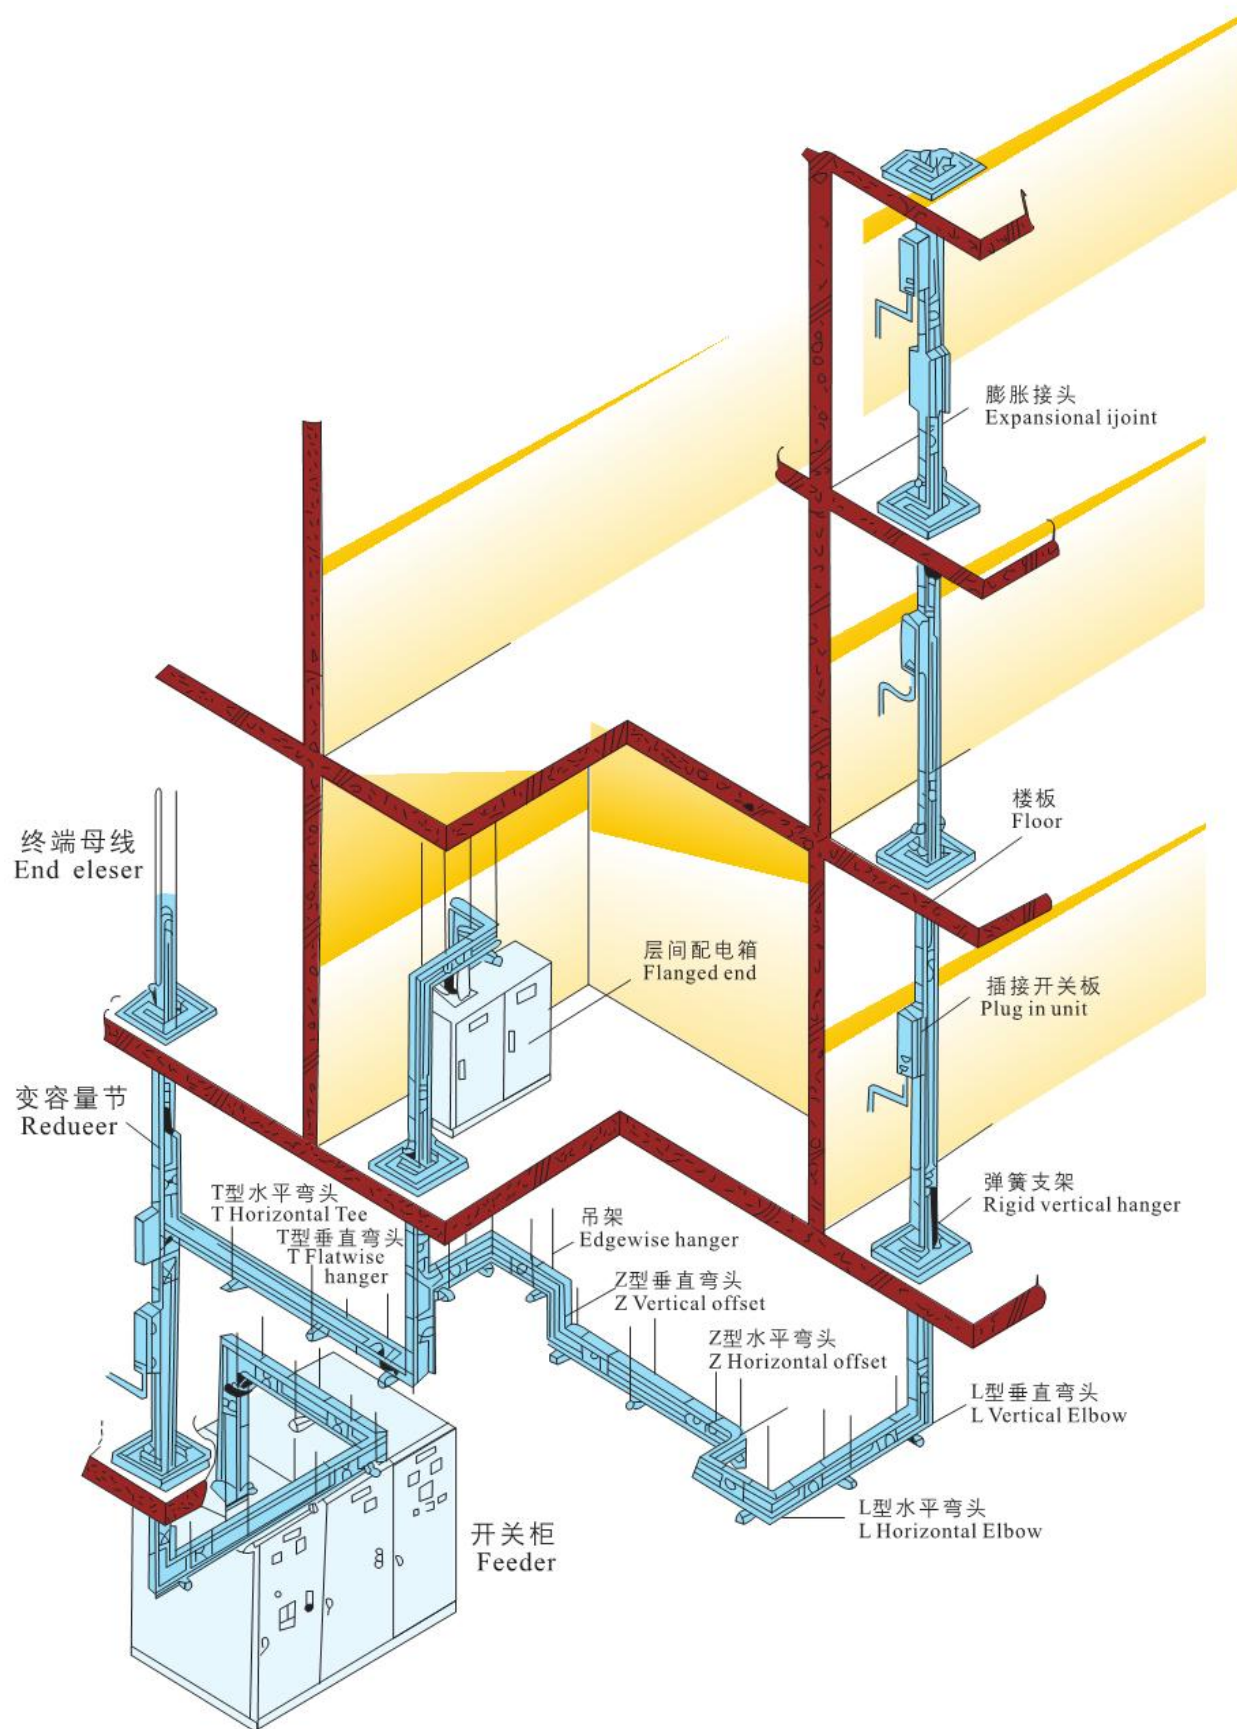





## KFM 母线槽系统 BUS DUST SYSTEM



### KFM型母线槽的设计特点：

#### 单螺栓夹紧端子

母线槽设计采用了先进的单螺栓夹端子，为母线槽单元连接元件，由于它的特殊构造，可以防止安装时的错误操作，同时只要旋紧一个螺栓，就能可靠地、迅速地将两个母线槽单元连接起来。

#### 高防护等级插孔

母线槽在插孔处设计了安全防护挡板，只有当防护挡板拉开时，插接箱才能插入，插孔平时不用时可将防护板拉闭并加铅封锁死，防止了在插口处灰尘和异物的进入，从而提高了母线槽的防护性能，防止误操作，使母线的安全性得到了极大的提高。

#### 外壳（防护壳）级次数

母线槽设计5个电流等级，只采用了3个级次的外壳，这样当系统按相邻等级变换容量时母线槽无需更换外壳，如400A变630A时，外壳尺寸相同，因此大大方便了安装。

#### 传输电能大

母线槽设计为分离空气绝缘式，改善了母线槽的散热性，降低了阻抗,达到了母线槽最佳经济输电。

#### 成套性好

母线槽设计了各种功能的连接单元，可满足所有输配电工程的需要。



## KFM-4A 分离绝缘母线 KFM-4A Separating And Insulating Bus



A直线型母线  
Straight Line Type of bus



LS垂直弯头  
Elbow Bend



ZSZ型弯头  
Type Z Bend




各种角度形状的连接元件  
Connectiue Components in Uarious Forms



TST型弯头  
Type T Bend



插接箱  
Connection Box








连接端子  
Connectiue Terminal



## 快速连接 Rapid Connection


密集型母线槽系螺栓连接法，任何人都能轻而易举地进行连接操作，但扭紧接头螺栓是母线连接的保证，630A以下母线力矩必须达到8kg，800A以上力矩必须达到12kg，紧固后的检验要求用0.01mm塞尺检查。

A dense bus channel link is a kind of bolt connection . Anyone can carry out this connection operation easily, but the tightness is the ensurity of connection of the buses . The bus moment less than 630A,must reach 8kg , and the bus moment over 800A,must reach 12kg .The tightened inspection requires with 0.01mm,feeler.

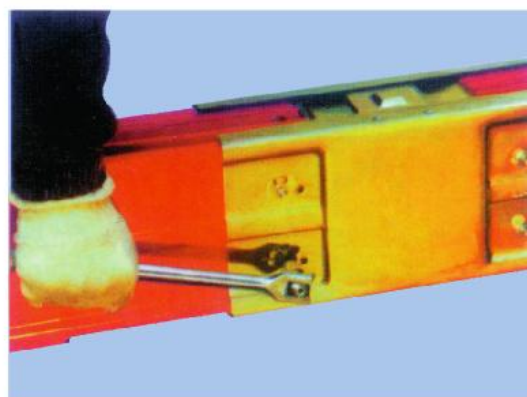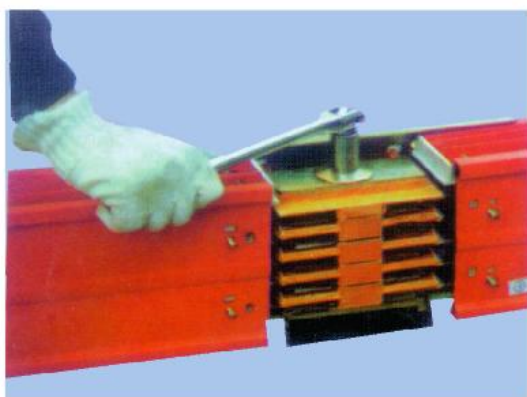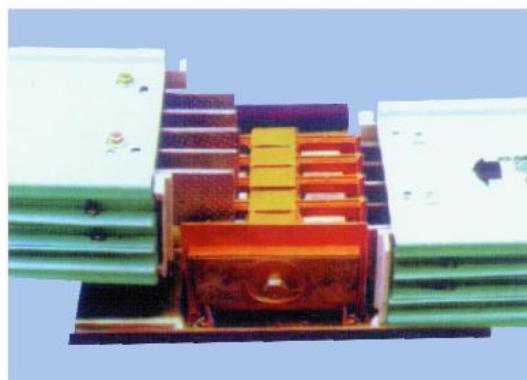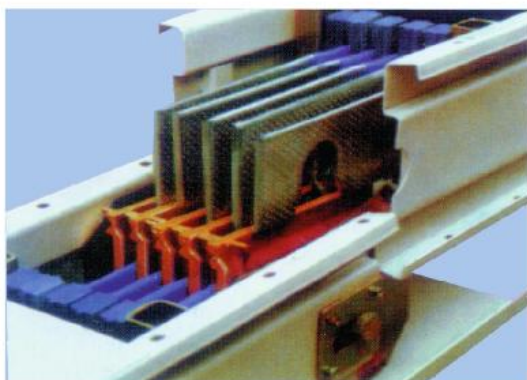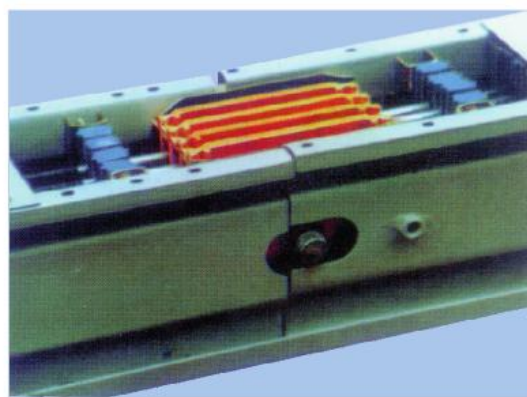


## KFM-4A分离绝缘母线 KFM-4A Separating And Insulating Bus

### 外形尺寸及重量 Dimension and Weight

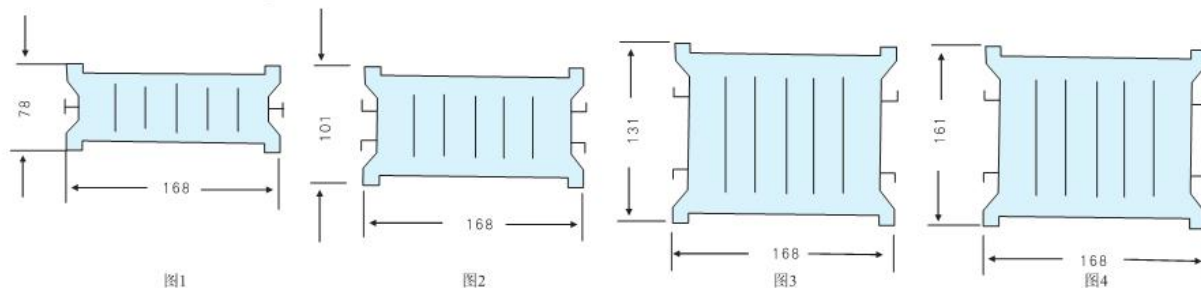

| 电 流 (A)<br>Current (A) | 三 相 五 线kg/m<br>3 phasws 5 wires | 三 相 四 线kg/m<br>3 phasws 4 wires | 图 号<br>(Drawing) |
|------------------------|---------------------------------|---------------------------------|------------------|
| 250                    | 17.168                          | 15.618                          | 1                |
| 400                    | 19.315                          | 16.850                          | 2                |
| 630                    | 23.745                          | 20.465                          | 2                |
| 800                    | 28.714                          | 24.615                          | 3                |
| 1000                   | 34.604                          | 29.125                          | 3                |
| 1250                   | 41.815                          | 33.803                          | 4                |
| 1600                   | 46.865                          | 40.925                          | 4                |

### 外形尺寸及重量 Dimension and Weight

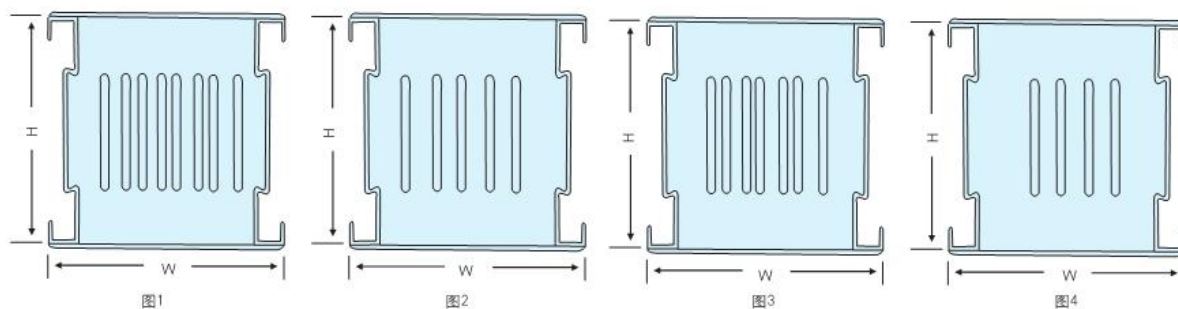

| 电 流 (A) Current (A) | 三 相 四 线kg/m<br>3 phasws 4 wires |           | 三 相 五 线kg/m<br>3 phasws 5 wires |           |
|---------------------|---------------------------------|-----------|---------------------------------|-----------|
|                     | 外形W×H                           | 重量 (kg/m) | 外形W×H                           | 重量 (kg/m) |
| 1250                | 190×180(图1)(Drawing 1)          | 42.92     | 205×180(图3)(Drawing3)           | 46.80     |
| 1600                | 190×180(图1)(Drawing 1)          | 48.26     | 205×180(图3)(Drawing3)           | 52.16     |
| 2000                | 190×180(图1)(Drawing 1)          | 53.60     | 205×180(图3)(Drawing3)           | 57.50     |
| 2500                | 240×180(图2)(Drawing 2)          | 68.58     | 255×180(图4)(Drawing4)           | 72.48     |
| 3150                | 240×180(图2)(Drawing 2)          | 78.55     | 255×180(图4)(Drawing4)           | 82.45     |
| 4000                | 240×180(图2)(Drawing 2)          | 85.54     | 255×180(图4)(Drawing4)           | 89.44     |



## CFW-2A 母线槽系统 BUS DUST SYSTEM





产品特点及应用:

CHARACTERISTICS AND APPLICATION:


CFW-2A高强封闭式母线在空气型和密集型母线的基础上,对外型结构的设计进行了改进。采用成型机成型,使其具有很好的支撑强度,解决了大跨度无法支撑吊装的困惑。

The design for the shell structure of CFW-2A high intensity seal bus channel has been improved on the base of air type and concentrated type ; and the shall is shaped through forming machine. So it has the large support strength. And this can solve the puzzle of erection difficulty due to the long span.

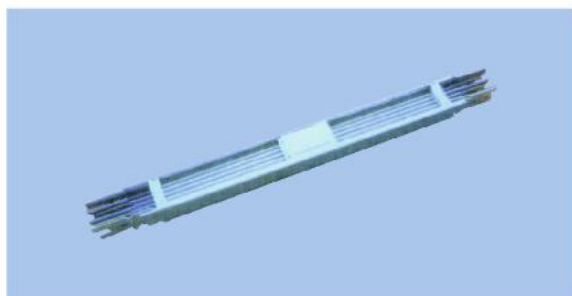

密集型母线槽系螺栓连接法，任何人都能轻而易举地进行连接操作，但扭紧接头螺栓是母线连接的保证，630A以下母线力矩必须达到8kg，800A以上力矩必须达到12kg，紧固后的检验要求用0.01mm塞尺检查。

A dense bus tank of peg graft is a kind of bolt connection , Anyone can carry out this connection operation easily, but tight ness of swage-bolt is the ensurity of connection of the buses . The bus less than 630A,must reached 8kg , and the bus thats over 800A,must reached 12kg, the tightened inspection require 0.01mm feeler.

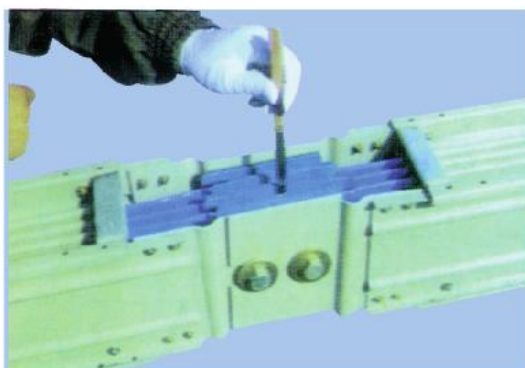




## 带插孔母线

本母线之特优功能，可在一米长度安排二个插口，如二面插口即达四个插口而不影响母线支撑强度。通过插接箱电流分支一插就可免遭电缆剥皮连接不安全之苦恼。如你的产品，设备更换，将母线重新组合安排，母线插口分支始终可达到你所需的位置。故使用母线配线可令您终身满意。

## SOCKET BUS

The best function of Socket Bus is that two sockets can be arranged during one metee bus .Adding the two socket to the two ends of the bus, there are 4 sockets, which don' t Effect the sustence intensity of Buses.

Connection through the branch electric current of connection Channel can be avoid the trouble ofnot safe connection by peeling the skin of buses . If you change your products and equipments, you' ll arrange only again and the socket branch of the bus socket always meet your requirments. Using the bus is your best choice.

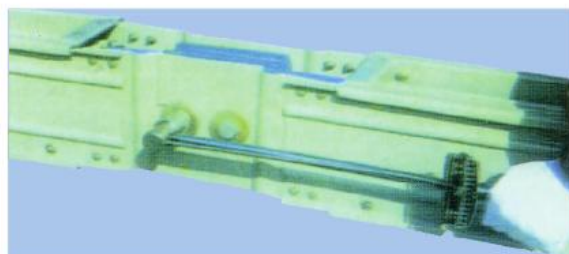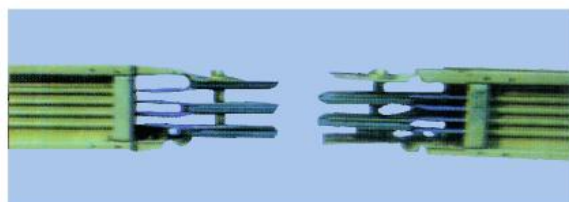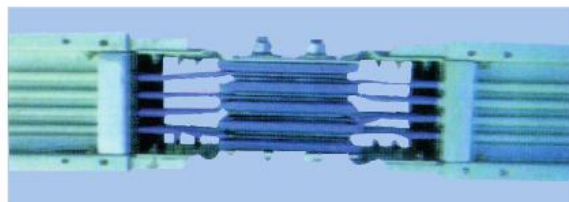



插接箱 Connection box

插接箱是用户使用最为频繁，分支电流保护关键之部位。本厂插接箱具有必须分断开关,方可打开，开闭箱门及拔出式插入的防护功能,其性能可防止一切误操作行为。

本插接箱插脚采用通用件，如用户需增大分支电流,可在原箱增加插脚，更换开关即可。此外，插脚附有二块65锰弹簧钢片,确保插接200次以上仍是具有良好的弹性接触。

本插接箱结构可在外并可变换方位操作,也可购买本厂操作纵杆,用户可在地面直接方便地分、合开关。

Used very frequently by users,Connection Box is Crucial position protected by branch electric Current. It is provided with many protective functions, such as must separated and shutoff switch , permissible opening, shut off box door, pull insertion, as well as preventing from any of wrong operations. The socket of Connection Box is the universal card.It's convenient for users to increase the electric current through adding socket on the same box and changing switch. Other wise, the socket attaches two pieces of 65Mn cushion stell slices, which guarantee the effective elastica with over 200 times connections.

The structure of Box is fit for carring out the operation of changing directions outside the Box. It's also easy for users to separate or shut switch directly on the ground with the control stich made by our plant.



插接箱规格、型号、外型尺寸 Specifications, Types & Outline Dimensions Of Connection Box:

| 型号 Type                                                  | 电流Electric Current       | 尺寸Dimensions(L×K×H)      |
|----------------------------------------------------------|--------------------------|--------------------------|
| C/B*20内装DZ20开关C/B×20(Be fitted with DZ20 Switch inside)Z | 100A                     | 425×220×170              |
| B*H内装H系列BBXH(Be fitted with H series inside)             | 250A                     | 583×240×195              |
| B*J内装寺崎系列BXJ(Be fitted with shichi Series inside)        | 450A                     | 583×240×195              |
| B*10内装DZ10开关BX10C(Be fitted with DZ10 Switch inside)     | 600A                     | 710×300×200              |
| B*C内装梅兰系列 BXC(Be fitted with Meilan Series inside)       | 60A                      | 425×220×170              |
| 说明 Explanation                                           | C.内操作 C.inside operation | B.外操作B.outside operation |



## BMC-2F 母线槽系统 BUS DUST SYSTEM



### 产品特点及应用

#### CHARACTERISTICS AND APPLICATION:


BMC-2F空气绝缘封闭母线槽吸取了美国空气型母线之精华，进行优化设计，采用双层绝缘，隔相垫块采用4220耐电弧粉制成，防爆、阻燃、从而弥补了母线绝缘材料耐高温性能之不足，使其更安全可靠，并能承受较大的电动力，和较好的散热性能，扩大了该系列产品的应用领域。特别适合用于工矿企业大中型机电设备的输配电。

BMC-2F separating high intensive seal bus channel is made with the double layer insulation and 4220 electric arc powder through absorbing the extraction of air type of bus with explosion-proof and flame retardant performance from U.S .and further optional design. This can counteract the weakness of insulation material not bearing high temp, and make it safe, reliable; and bear larger power; and have better radiation. So it can enlarge the applicable fields and be suitable for the transmit electricity and the distribution for the medium and large sized mechanoelectrical equipments in industrial and mining enterprises.




## BMC-2F 空气绝缘母线槽

## BMC-2F Air Insulation Bus-bars

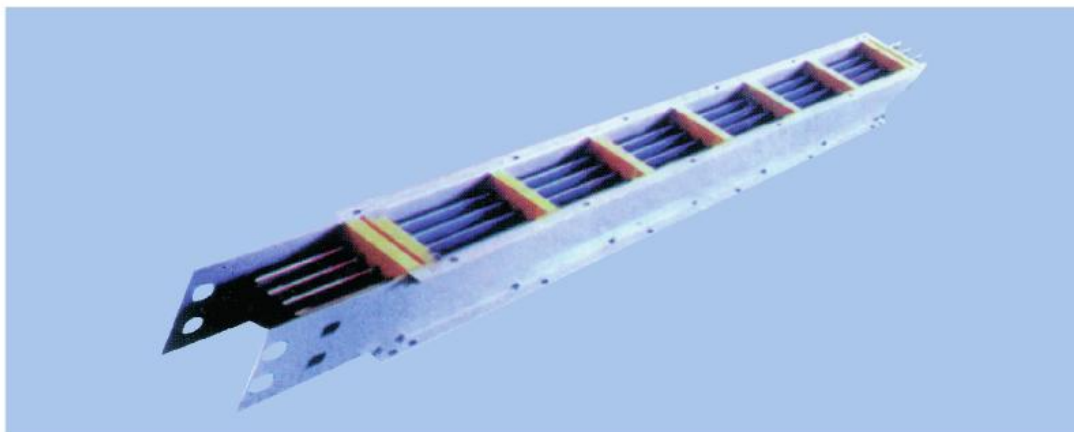


### 母线结构，电流及尺寸表


The wire of bus structures currents and sizes



三线制 three-wire system



四线制 four-wire system



五线制 five-wire system

### CFC-4A铝质母线 CFC-4A ALUMINUM BUSES

| 额定电流<br>Rated<br>Current<br>(A) | 三线制three-<br>Wire system |           | 四线制four-<br>Wire system |           | 五线制five-<br>Wire system |           |
|---------------------------------|--------------------------|-----------|-------------------------|-----------|-------------------------|-----------|
|                                 | W<br>(mm)                | H<br>(mm) | W<br>(mm)               | H<br>(mm) | W<br>(mm)               | H<br>(mm) |
| 100                             | 160                      | 100       | 180                     | 100       | 200                     | 100       |
| 250                             | 160                      | 100       | 180                     | 100       | 200                     | 100       |
| 400                             | 160                      | 110       | 180                     | 110       | 200                     | 110       |
| 630                             | 160                      | 120       | 180                     | 120       | 200                     | 120       |
| 800                             | 160                      | 130       | 180                     | 130       | 200                     | 130       |
| 1000                            | 160                      | 150       | 180                     | 150       | 200                     | 150       |
| 1250                            | 160                      | 180       | 180                     | 180       | 200                     | 180       |
| 1600                            | 160                      | 220       | 180                     | 220       | 200                     | 220       |

### CFC-4A 铜质母线 CFC-4A COPPER BUSES

| 额定电流<br>Rated<br>Current<br>(A) | 三线制three-<br>Wire system |           | 四线制four-<br>Wire system |           | 五线制five-<br>Wire system |           |
|---------------------------------|--------------------------|-----------|-------------------------|-----------|-------------------------|-----------|
|                                 | W<br>(mm)                | H<br>(mm) | W<br>(mm)               | H<br>(mm) | W<br>(mm)               | H<br>(mm) |
| 100                             | 160                      | 100       | 180                     | 100       | 200                     | 100       |
| 250                             | 160                      | 100       | 180                     | 100       | 200                     | 100       |
| 400                             | 160                      | 110       | 180                     | 110       | 200                     | 110       |
| 630                             | 160                      | 120       | 180                     | 120       | 200                     | 120       |
| 800                             | 160                      | 130       | 180                     | 130       | 200                     | 130       |
| 1000                            | 160                      | 150       | 180                     | 150       | 200                     | 150       |
| 1250                            | 160                      | 180       | 180                     | 180       | 200                     | 180       |
| 1600                            | 160                      | 220       | 180                     | 220       | 200                     | 220       |
| 2000                            | 160                      | 220       | 180                     | 220       | 200                     | 220       |
| 2500                            | 160                      | 255       | 180                     | 255       | 200                     | 255       |
| 3150                            | 160                      | 440       | 180                     | 440       | 200                     | 440       |




BMC-2F 分离绝缘封闭母线 BMC-2F Air Insulation Seal Bus




SH 始端箱  
Origine box




LC垂直弯通  
Uertical bending

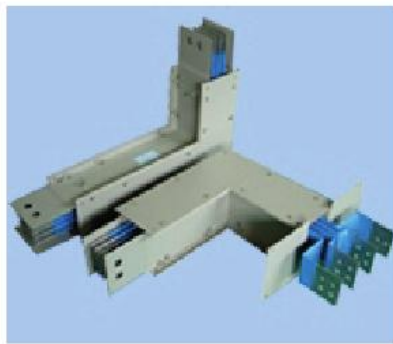

LS 水平弯通  
Horizontal bend

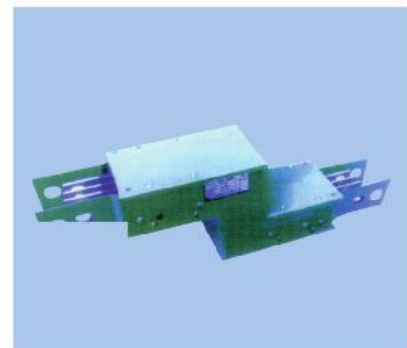

ZCZ型垂直弯通  
Elbow Type Z bending

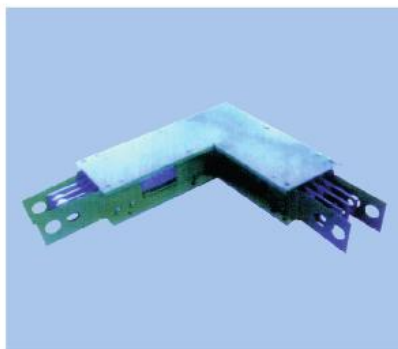

垂直带始端  
The uertical way with original end




## 插接开关箱 Connection Box

插接箱是用户使用最为频繁，分支电流保护关键之部位，箱内装有自动空气开关确保分路过载及短路保护，规格分100A、200A、400A、630A，整定电流根据用户选择。

插接箱的插脚是重要部件，本厂独有的工艺在插脚上另加二块65Mn弹簧钢片，确保插接200次以上仍具有良好的弹性接触，大于250A的插脚采用可靠的外力夹紧方法，使其具有良好的接触。

The jack box is a protection device for branch circuits, in which the automatic air switch will shut off electricity when overloading or short circuit occurs. Types include 100A, 200A, 400A and 630A, or rated current will be chosen on request by users.

The crucial part in the box is sockets. Our factory has developed a technique to add two 65 Mn spring steel slices to the socket to improve contact effect when connection is over 200 times. For a socket loading current larger than 250A, the external clamping will guarantee the effective contacts.

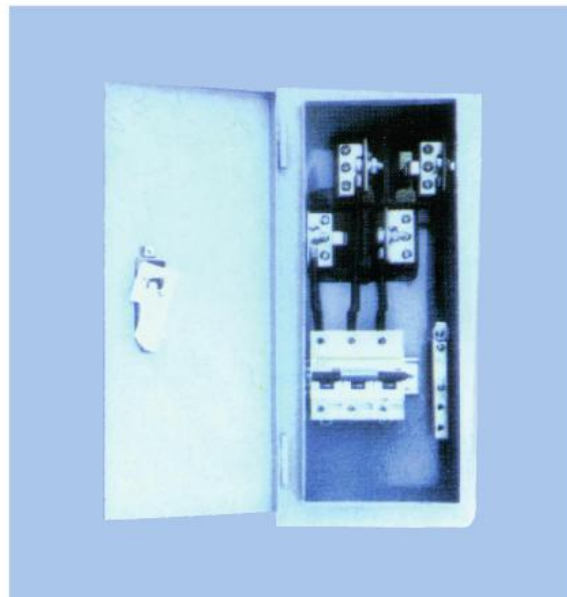

## 插接箱外形尺寸


### Structure and Size for Connection Boxes

| 电流 (CURRENT) | L×K×H       |
|--------------|-------------|
| 100A         | 480×240×152 |
| 200A         | 600×300×190 |
| 400A         | 700×320×192 |
| 630A         | 700×320×192 |





## CMC-3A密集型插接式母线槽 CMC-3A Dense Bus Tanks Of Peg Graft

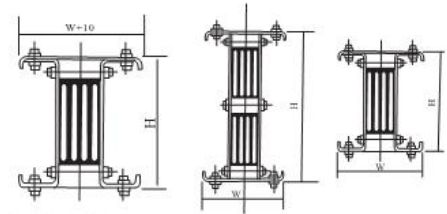

母线结构及电流等级表


The chart of bus structure and voltaic grade  
CMC-3A铜质母线 CMC-3A copper buses

| 额定电流<br>Rated Current | 每相母线<br>(毫米)<br>Bus of each<br>Phase(mm) | 三线制 three-wire system |           |                      | 四线制 four-wire system |           |                      | 五线制 five-wire system |           |                      |
|-----------------------|------------------------------------------|-----------------------|-----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|----------------------|
|                       |                                          | W<br>(mm)             | H<br>(mm) | 重量<br>Weight<br>kg/m | W<br>(mm)            | H<br>(mm) | 重量<br>Weight<br>kg/m | W<br>(mm)            | H<br>(mm) | 重量<br>Weight<br>kg/m |
| 100                   | 3×30                                     | 125                   | 70        | 13                   | 120                  | 80        | 15                   | 130                  | 80        | 16.5                 |
| 250                   | 6×30                                     | 125                   | 100       | 15                   | 140                  | 100       | 18                   | 160                  | 100       | 19.5                 |
| 400                   | 6×40                                     | 125                   | 100       | 18                   | 140                  | 100       | 22                   | 160                  | 100       | 20.5                 |
| 630                   | 6×50                                     | 125                   | 120       | 19                   | 140                  | 120       | 23                   | 160                  | 120       | 25                   |
| 800                   | 6×60                                     | 125                   | 120       | 25                   | 140                  | 120       | 25                   | 160                  | 120       | 26                   |
| 1000                  | 6×80                                     | 125                   | 170       | 30                   | 140                  | 170       | 31                   | 160                  | 170       | 34                   |
| 1250                  | 6×110                                    | 125                   | 170       | 41                   | 140                  | 170       | 39                   | 160                  | 170       | 42                   |
| 1600                  | 6×150                                    | 125                   | 230       | 44                   | 140                  | 230       | 51                   | 160                  | 230       | 54                   |
| 2000                  | 8×150                                    | 125                   | 230       | 50                   | 140                  | 230       | 55                   | 160                  | 230       | 58                   |
| 2500                  | 8×185                                    | 125                   | 260       | 57                   | 140                  | 260       | 63                   | 160                  | 260       | 67                   |
| 3000                  | 2×6×140                                  | 125                   | 310       | 80                   | 140                  | 360       | 98                   | 160                  | 360       | 102                  |
| 3500                  | 2×6×170                                  | 125                   | 520       | 88                   | 140                  | 520       | 110                  | 160                  | 520       | 115                  |
| 4000                  | 2×8×150                                  | 125                   | 520       | 100                  | 140                  | 520       | 126                  | 160                  | 520       | 130                  |

母线结构及电流等级表

The chart of bus structure and voltaic grade  
CMC-3A铝质母线 CMC-3A aluminum buses

| 额定电流<br>Rated Current | 每相母线<br>(毫米)<br>Bus of each<br>Phase(mm) | 三线制 three-wire system |           |                      | 四线制 four-wire system |           |                      | 五线制 five-wire system |           |                      |
|-----------------------|------------------------------------------|-----------------------|-----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|----------------------|
|                       |                                          | W<br>(mm)             | H<br>(mm) | 重量<br>Weight<br>kg/m | W<br>(mm)            | H<br>(mm) | 重量<br>Weight<br>kg/m | W<br>(mm)            | H<br>(mm) | 重量<br>Weight<br>kg/m |
| 250                   | 6×40                                     | 125                   | 100       | 9                    | 140                  | 100       | 11                   | 160                  | 100       | 12                   |
| 400                   | 6×50                                     | 125                   | 120       | 11                   | 140                  | 120       | 13                   | 160                  | 120       | 14                   |
| 630                   | 6×60                                     | 125                   | 120       | 13                   | 140                  | 120       | 15                   | 160                  | 120       | 16                   |
| 800                   | 6×80                                     | 125                   | 170       | 16                   | 140                  | 170       | 19                   | 160                  | 170       | 21                   |
| 1000                  | 6×100                                    | 125                   | 170       | 18                   | 140                  | 170       | 23                   | 160                  | 170       | 26                   |
| 1250                  | 6×140                                    | 125                   | 230       | 23                   | 140                  | 230       | 28                   | 160                  | 230       | 33                   |
| 1600                  | 8×170                                    | 125                   | 230       | 29                   | 140                  | 230       | 31                   | 160                  | 230       | 36                   |

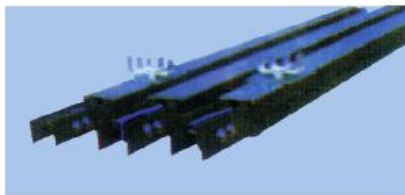

分岔电流

分支电流≥250A以上采用分岔母线与插接开关箱连接，可保证面接触的效果，更为安全。

### GRATINED BUSES

When the current of branch is more than 250A. We can connect the grained buses with the jack switch box. Ao we can ensure the surface contact more secure .

### 插接箱

插接开关箱内装自动空气开关(型号可根据用户选择)确保分路过载，短路保护。规格分100A、250A、630A，整定值根据用户选择,并生产组合配电、动力插接箱。

插接箱的插脚是重要的部件。本厂独有的工艺在插脚另加二块65锰弹簧钢片，确保插接200次以上仍具有良好的弹性接触。


### JACK BOX

There is an automatic air-switch (its model can be choosed by users themselves) in a

jack switch box . It can avoid the overload of branch and short circuit. Standards include 100A, 250A and 630A. Value of rectification is choosed by users them selves. We also produce Combined jack box of power distribution and power .

The base pin of a jack box is and important part. My factorys unique technique is adding two 65 manganese metal piece of spring to the base pin so it can ensure to keep the spring contact still fine after being contacted for more than 200 times .

### 始端母线 THE TOP BUS(SH) (L=500mm)

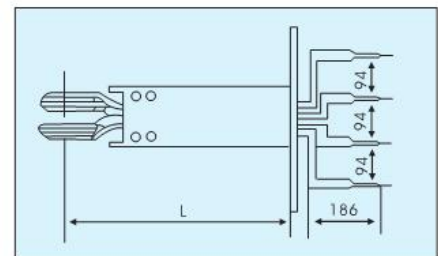

插接箱外型尺寸表

THE DIMENSION CHART OF A JACK BOXS INEOTYPE

| 电流 CURRENT           | L×K×H       |
|----------------------|-------------|
| 100A(轻型)(LIGHT DUTY) | 270×180×137 |
| 100A                 | 410×240×130 |
| 250A                 | 550×285×175 |
| 630A                 | 700×320×192 |





## GM-2 高压封闭母线 GM-2 High Voltage Sealed Bus-bars

### 概述 Intruction


GM-2高压封闭母线是本公司吸收国内共箱高压母线产品特点，及参照国外同类产品设计生产的新产品。它具有优良的机械特性，和电器特性，安全可靠，是高压大电流设备理想的输电设备。

GM-2高压封闭母线品种齐全，用户可以根据需要选择电流等级和电压等级。高压母线外壳采用铝合金外壳，有效的减小了涡流电流引起的发热损耗，并采用高强度性能的绝缘予支持导电体，具有良好的抗短路电动性能，室外安装时，高压母线具有可靠的防雨结构，并具有良好的接地保护系统，可以确保高压封闭母线长久安全可靠的运行。

型号、额定技术参数：Type,technical characteristics

GM-2 high voltage sealed bus-bars are designed according to the characteristics of the same products at home and abroad. The products have advantages of good mechanical and electrical properties.

GM-2 series products can be used according to the rate of voltage and current. They have less heat loss of eddy current and good property of re-short circuit, because their shells are manufactured by alumin-umalloy and their electric conductors are supported by hith strength insulators. When products are used outdoors, the constrution of rainproof is designed to ensure products safely work.


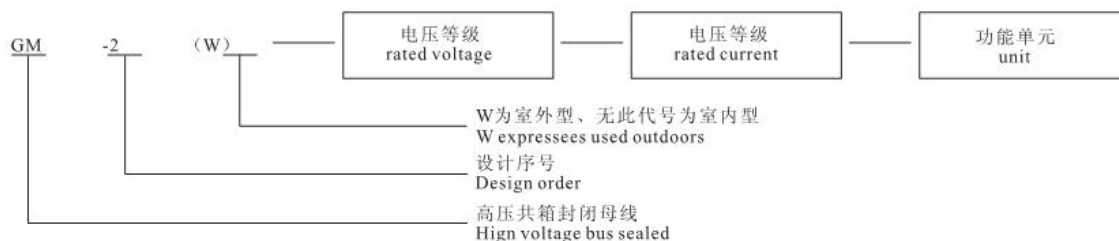


| 序号<br>Order | 功能单元<br>Unit                     | 备注（标准长度）<br>Notice(length) | 序号<br>Order | 功能单元<br>Unit                  | 备注（标准长度）<br>Notice(length)       |
|-------------|----------------------------------|----------------------------|-------------|-------------------------------|----------------------------------|
| 1           | 直线段<br>Ordinary                  | 4M.3M.2M.1M                | 4           | 膨胀节<br>Swell joint            | 1M.1                             |
| 2           | 水平90° 弯头<br>Horizontal 90° joint | 0.8M+0.8M                  | 5           | 缓冲段<br>Cushion joint          |                                  |
| 3           | 垂直90° 弯头<br>Vertical 90° joint   | 0.8M+0.8M                  | 6           | 接口（与变压器）<br>Transformer joint | 带穿墙套管<br>Cover to penetrate wall |


- 1、安装型式：GM-2高压封闭母线可以在室外安装，具有防雨，防风结构。安装维修孔一般向上安装，维修孔需要向下安装时，可以在定货时向生产厂说明。
- 2、本品适用于高压变压器与高压变电盘之间的电气连接，发电机组与引压变压器之间的电气连接。
- 3、配电方式：3相3线，外壳接地。
- 4、额定电压：3.45KV~40.5KV
- 5、额定电流：3.45KV~11.5KV 400A~3000A；40.5KV 100A~1000A。
- 6、额定频率：50Hz
- 7、箱体：采用弱磁性钢板及铝合金板作箱体外壳。
- 8、接地保护系统：符合IEC-364-5-54对接地系统的要求。
- 9、防护等级：室内安装型：IP40；室外安装型：IP43。
- 10、负载性能：在额定电流下导电体及外壳的温升符合GB763-74交电高压电器表长工作时的温升要求。
- 11、短路性能：动稳定及热稳定符合交流高压电器动、热稳定试验方法，GB-2706-81标准的要求。
- 12、绝缘性能：符合GB311.1-83标准要求。

- 1.Installing :Products can be installed outdoors. The maintaiopenings must be up except of particular instructing when user make the construct with manufacturer.
- 2.The products can be used as jount between high voltage transformer and high voltage disributor or and electric generator.
- 3.Distributing mode: three-phase , and shell as ground wire.
- 4.Rated Voltage:3.45KV 140.5KV
- 5.Rated current :3.45KV 11.5KV,400\300A,else, 40.5KV 100\1000A
- 6.Rated frequence:50HZ
- 7.Shell:less magnetic steel or aluminium alloy
- 8.Earth lead :up to the standard of IEC-364-5-54
- 9.Protection class: indoor,IP40;outdoor,IP43
- 10.Loading property:When the using current is less rated current,the temperature of electric conductors and shells is up to the standard of GB763-74.
- 11.Short current property:Dynamic and heat stability are up to the standard of GB2706-81.
- 12.Insulating : up to the standard of GB311.1-83.


## GM-2 高压封闭共箱母线 GM-2 High Voltage Bus Of Community Box

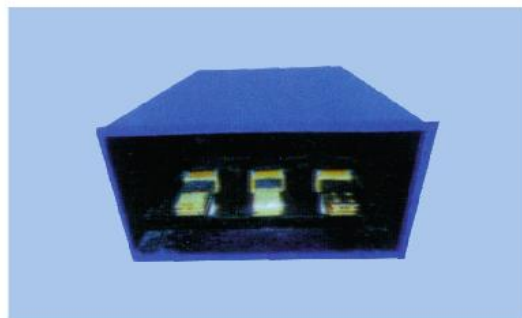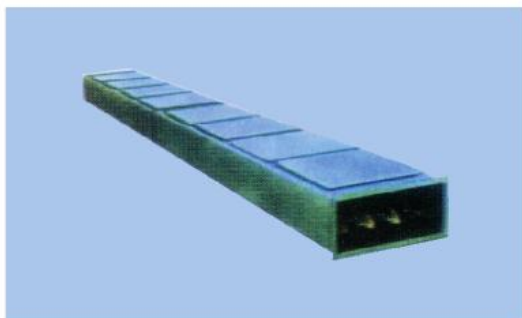

共箱母线道体平放  
Horizontal laying of bus of community box

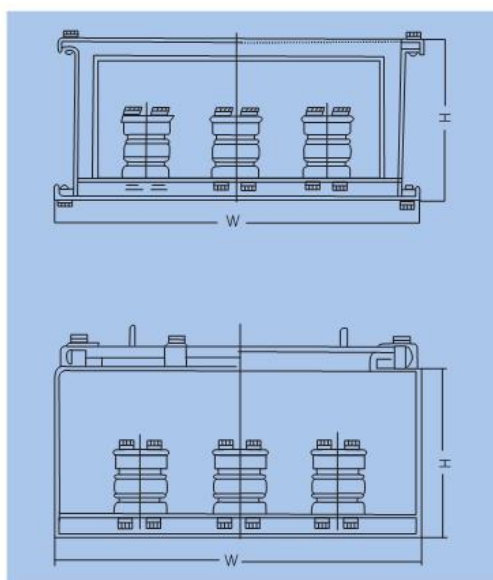

室外型高压封闭母线断面示意图  
Sketch for the section of out-door high voltage seal bus

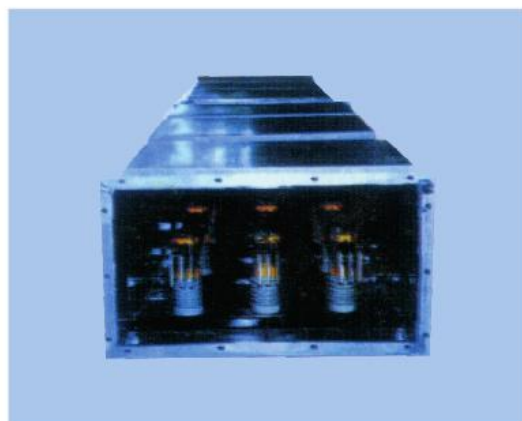

共箱母线道体竖放  
Vertical laying of bus of community box

高压封闭共箱母线外型参考尺寸表：  
The Overall Dimension of High Voltage Seal Bus of Community Box

| 额定最高工作电压<br>Rated Working Voltage        | 3.45(KV)    |           |           | 6.3(KV)     |           |           | 11.5(KV)    |           |           | 35(KV)      |           |           |
|------------------------------------------|-------------|-----------|-----------|-------------|-----------|-----------|-------------|-----------|-----------|-------------|-----------|-----------|
|                                          | 额定电流<br>(A) | W<br>(mm) | H<br>(mm) | 额定电流<br>(A) | W<br>(mm) | H<br>(mm) | 额定电流<br>(A) | W<br>(mm) | H<br>(mm) | 额定电流<br>(A) | W<br>(mm) | H<br>(mm) |
| 电<br>流<br>等<br>级<br><br>Current<br>Grade | 400         | 570       | 270       | 400         | 670       | 310       | 400         | 790       | 370       | 200         | 1630      | 770       |
|                                          | 600         | 570       | 270       | 600         | 670       | 310       | 600         | 790       | 370       | 400         | 1630      | 770       |
|                                          | 800         | 615       | 270       | 800         | 715       | 310       | 800         | 835       | 370       | 600         | 1675      | 770       |
|                                          | 1000        | 690       | 270       | 1000        | 790       | 310       | 1000        | 910       | 370       | 800         | 1675      | 770       |
|                                          | 1200        | 615       | 270       | 1200        | 715       | 310       | 1200        | 835       | 370       | 1000        | 1750      | 770       |
|                                          | 1500        | 690       | 270       | 1500        | 790       | 310       | 1500        | 910       | 370       |             |           |           |
|                                          | 2000        | 840       | 270       | 2000        | 940       | 310       | 2000        | 1060      | 370       |             |           |           |
|                                          | 2500        | 690       | 470       | 2500        | 790       | 510       | 2500        | 910       | 570       |             |           |           |
|                                          | 3000        | 690       | 470       | 3000        | 790       | 510       | 3000        | 910       | 570       |             |           |           |



## 编织线软连接 Braided Flexible connector



### 编织带

冷压铜软连接，镀锡或镀银，根据要求。

### Braided Shunts

Pressed copper connectors, tin coated on request.



### 压焊软连接

- 接触区：热压焊（分子扩散焊）。
- 铜带：0.1mm厚至0.3mm。
- 也可提供接触区镀锡或镀银设计。

### Press Welded Shunts

- Contact areas: Pwr PRESS-WELDED.
- Copper strips: 0.1mm thick witcover sheet 0.3 mm.
- It is also possible to deliver contact areas with tinned or silvered design.

### 关于压焊的说明

压焊仅用于紫铜，它取决于其尺寸和用户技术条件。将叠片部分压在一起，并通过大电流加热成型。每片之间的接触电阻几乎为零。

### Notes Regarding Press Welding





Press welding can only be performed on red copper and it depends on its dimensions and customer specifications. The laminated sections are compressed and reconstructed by block during the terminal phase, via use of high currents. The contact resistance between each lamina is almos zero.

## 照明母线系列 Bus Channel For Lighting

本照明母线槽外壳为挤压成型，具有体积小、强度大、安装方便等优点，适用于各种场所的日光灯，汞灯及其它照明器材的供配电用，规格有：20A、40A。

The bus channel have a case of squeezing tforming .  
 Advantages:Small Vloum,high strength and coveniently ficing ,etc. Adapt for power supply and distribution of flu-orescent lamp, mercury-arc lamp and other lighters any-wher.

Standards :20A.40A

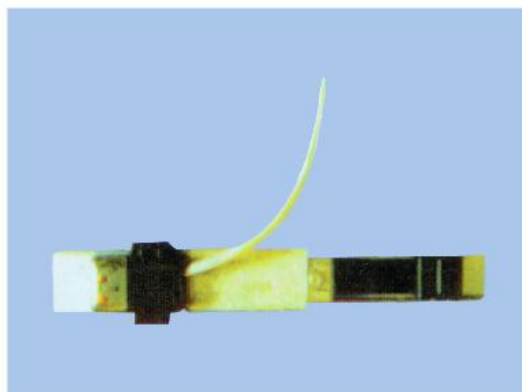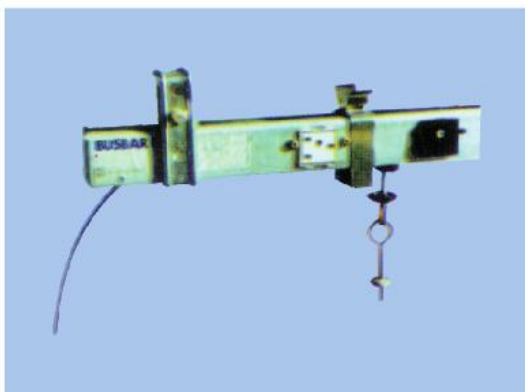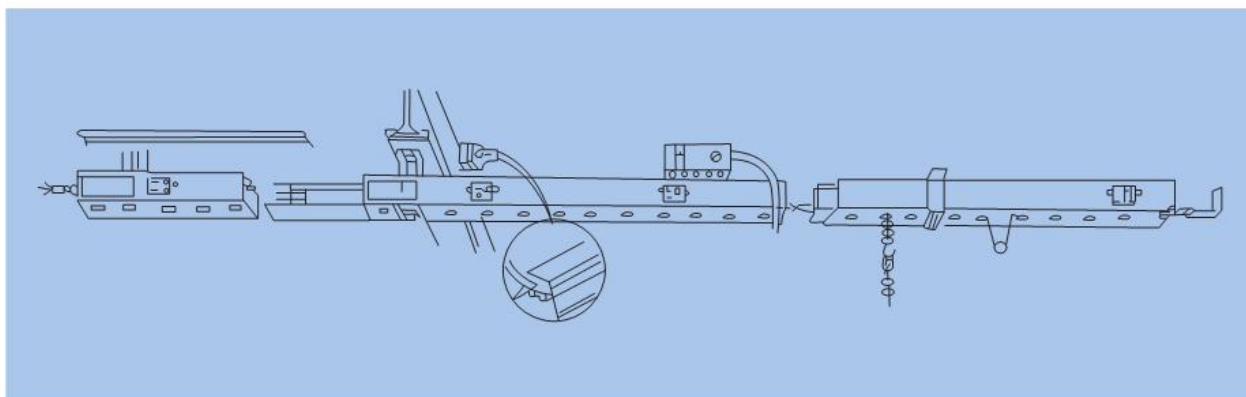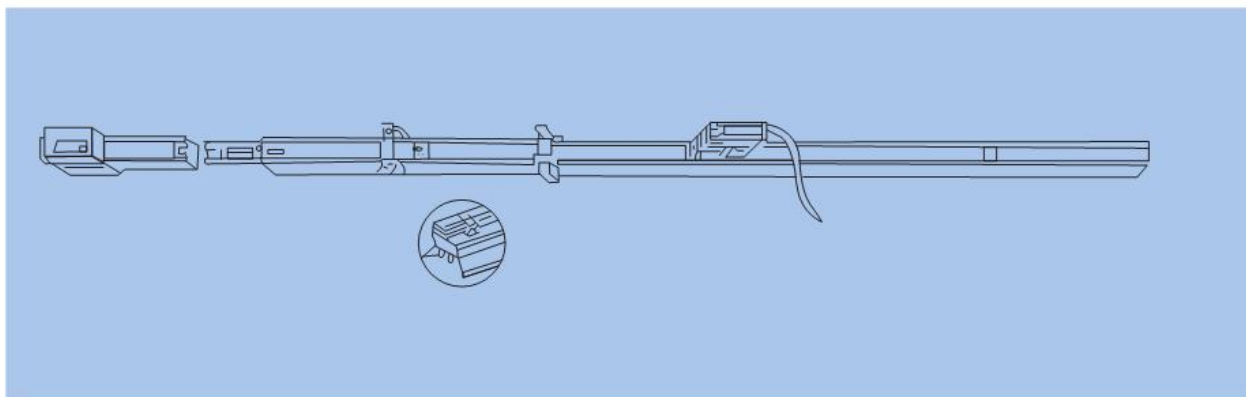



## 订货须知

尊敬的客户：

非常荣幸您能在百忙中看完我们的产品选型样本，这已为我们相互间的了解奠定了基础。真诚希望您能给我们一次合作的机会，我们将为您提供热情周到的服务。

我们热忱欢迎您来函、来电垂询，并期待着您的光临。衷心祈盼您能选用或推荐本公司生产的电缆桥架及高低压母线等系列产品。对您的厚爱我们将深深地感谢……当您决定选用或推荐本公司的产品，请您注意如下事项：

### 桥架系列产品：

- 1、所需桥架型号、规格、数量；
- 2、安装方式及安装支架清单；
- 3、表面处理喷涂颜色、电镀、热浸锌等（由用户指定）。

### 母线系列产品：

- 1、所需母线的型号、规格、数量；
- 2、绝缘夹板的规格及数量；
- 3、弹簧支撑的规格及数量；
- 4、膨胀节、软连节的规格及数量；
- 5、需提供母线走向示意图；
- 6、表面处理，颜色及交货期。